

## POWER SUPPLIES

Switch-Mode Power Supplies, Electronic Circuit Protection and Accessories





## DID YOU KNOW...?

### FACTS ABOUT MURRELEKTRONIK

- Founded in 1975 by Franz Hafner
- Family-owned and operated company
- More than 2,700 employees worldwide
- Representatives in more than 50 countries
- 5 Production facilities
- Over 1 million articles in stock

### THE EMPARRO SYSTEM – A PERFECT MATCH

- Filter, power supply unit and UPS module
- Cutting edge technology
- Consistent handling
- Uniform design
- Optimum EMC compatibility
- Maximum system availability

## THE CORE OF YOUR CONTROL CABINET

**The switch-mode power supply is the core of your control cabinet – and Murrelektronik's power supply units are the perfect regulators.**

Our focus is to provide constant, constant output voltages for your system – independent of how much input voltage fluctuates. We provide you with the most reliable solutions for almost any application, for example: in the machine tool building industry, in the processing industry or in the shipbuilding industry. Our wide product range of power supply units designed with cutting edge technology make sure that you have the best product for your requirements.

Our certified, in-house test center ensures that our switch-mode power supplies are well-engineered and operate perfectly. Our power supply units have many approvals and feature a wide input voltage range, which makes them suitable for global applications. We are represented all over the world with branch offices and distributors: You can buy our products in over 40 countries.



### MURRELEKTRONIK'S POWER SUPPLY SYSTEMS

- Comprehensive product range with switch-mode power supplies, transformers, buffer and UPS modules, redundancy modules, electronic circuit protection and much more
- High flexibility with the right model for your requirements
- 100% compatible
- For global applications
- Our system specialists will help you create your perfect power supply system
- Durable units ensures system availability

Functions	Eco-Power	Eco-Rail2	Emparro® 1~	Emparro® 3~	Emparro67
Screw terminal	x	x			
Spring clamp terminal			x	x	
Pluggable terminal					
Connector					x
DIN rail mounting		x	x	x	
Screw connection			x	x	x
Full power up to 40 °C	x	x	x	x	x
Full power up to 60 °C			x	x	x
20% more power up to 45°C			x	x	
50% Power boost			x	x	x
Derating up to 55 °C	x	x			
Derating up to 70 °C			x	x	x
Automatic wide voltage input 90...265 V	x <sup>1</sup>	x <sup>1</sup>	x		x
Automatic wide voltage input 360...520 V				x	
Parallel connection			x	x	
Series connection	x	x	x	x	x
AC and DC input			x	x	x
Coated PCB			x	x	
UL		x	x	x	
DNV-GL			x	x	
Alarm contact			x	x	
IO-Link					x <sup>1</sup>
IP67					x
Integrated electronic circuit protection (Mico)					x <sup>1</sup>



<sup>1</sup> some models

Product Selection	Output		Eco-Power	Eco-Rail2	Emparro® 1~	Emparro® 3~	Emparro67	
Single-phase input	12 V	0,85...1 A						
		2,5 A						
		4,5...5 A						
		6 A						
		10 A				85434*		
	24 V	0,6 A	85150					
		1,3 A	85151	85131				
		2,5 A	85152	85132				
		4,0 A						9000-11112-1962020
		4,2...5 A	85153	85133	85440*			
		7,5 A	85154					
		8 A						9000-11112-2062020
		10 A	85155	85135	85441*			85676*
		20 A		85137	85442*			
48 V	2,5 A			85437*				
	5 A			85438*				
	10 A			85439*				
3-phase input	24 V	5 A				85690*		
		10 A					85691*	
		20 A					85692*	
		40 A					85693*	
	30,5 V	4 A					85383	

\* other versions available


## CONTINUAL SHORT CIRCUIT AND OVERLOAD PROTECTION

Switch-mode power supplies have different power-down characteristics that make sure the unit's electronics are protected when overloads or short circuits occur. Murrelektronik's power supply units features the following characteristics:

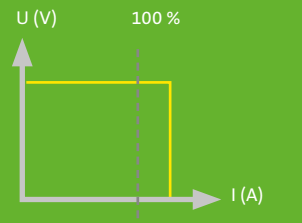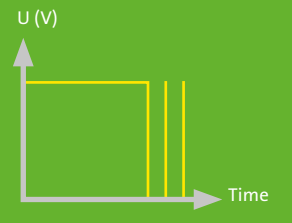CURRENT-LIMITER	HICCUP MODE/ AUTO RESTART
	
<p>EMPARRO, ECO-RAIL-2* AND ECO-POWER*</p> <ul style="list-style-type: none"> <li>Starts large loads reliably</li> <li>Limited function in case of error</li> <li>PowerBoost function</li> </ul>	<p>ECO-RAIL-2* AND ECO-POWER*</p> <ul style="list-style-type: none"> <li>Powers down in case of error</li> <li>Restarts automatically when error is fixed</li> </ul>

\* Diagram applies to models several

### POWER BOOST FUNCTION

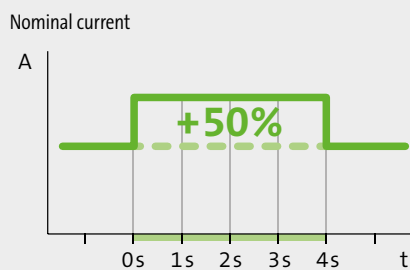

The Current Limiter and Power Limiter functions are excellent for starting capacitive loads. Units with these features do not simply switch off, but they reduce the voltage or provide a higher inrush current with the PowerBoost function.

Before changing over into this protected mode, many of Murrelektronik's power supplies provide an over current four times larger than the nominal current for a few milliseconds. This is another great advantage.

# EMPARRO® 1~




## PREMIUM POWER

It is our goal to develop new, efficient power supply units. Each percentage of efficiency saves you money and significantly increases machine availability. The degree of efficiency directly influences size, service life and temperature sensitivity of a power supply. A rough estimate is that if a device's temperature is increased by 10 °C/50 °F, the life of the power supply is reduced by half!

An example, your 24 V/10 A unit has an efficiency of 85 %, which corresponds to power loss of 15 % or 26 W. With an efficiency of 95 %, the power loss is instantly reduced by a third: 12 W.

The higher the efficiency the lower the heat generation and the smaller the unit can be.

## EMPARRO VS. STANDARD POWER SUPPLY

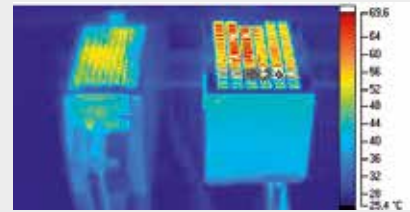

### 1-phase

- short-circuit and overload-protected
- Power boost 150 %
- Parallel connection possible



### Emparro®

OUTPUT: 12...15 VDC  
Current: 10 A



### Emparro®

OUTPUT: 24...28 VDC  
Current: 5 A



### Emparro®

OUTPUT: 24...28 VDC  
Current: 10 A



### Emparro®

OUTPUT: 24...28 VDC  
Current: 20 A



Ordering data	Art. No.	Art. No.	Art. No.	Art. No.
For mounting rail	85434	85440	85441	85442
Fastening with screws	85712	85702	85703	85704
Coated PCB		9000-11112-0921111	9000-11112-1221111	9000-11112-1421111
<b>Input</b>				
Input voltage	85...265 VAC/90...250 VDC			
Input current	1.2 A (100 V AC); 0.6 A (240 V AC)	1.3 A (100 V AC); 0.61 A (240 V AC)	2.6 A (100 V AC); 1.1 A (240 V AC)	5.2 A (100 V AC); 2.2 A (240 V AC)
Inrush current after 1 ms	max. 10 A (230 V AC)	max. 5.5 A (230 V AC)	max. 13 A (230 V AC)	max. 23 A (230 V AC)
<b>Output</b>				
Output voltage	12...15 V DC adjustable	24...28 V DC adjustable		
Power boost	150 % for 5 seconds / 120 % continuous			
Efficiency	up to 95 %			
Device protection	short-circuit and overload-protected (output), Current Limiter			
<b>General data</b>				
Holdup time	> 30 ms at 100 V AC			
LED display	LED green/red			
Temperature range	-40...+60 °C without derating / 60...70 °C Derating (storage temperature -40 ... +85 °C)			
Mounting method	snaps on to the mounting rail TH35 (EN 60715)/with screw fastening			
Dimensions (W x H x D)	123 x 50 x 138 mm	123 x 50 x 138 mm	123 x 65 x 167 mm	138 x 85 x 182 mm
Other	Relay alarm contact for short-circuit, overload and overtemperature			

### 1-phase

- short-circuit and overload-protected
- Power boost 150 %
- Parallel connection possible



#### Emparro®

OUTPUT: 48...56 VDC  
Current: 2.5 A



#### Emparro®

OUTPUT: 48...56 VDC  
Current: 5 A



#### Emparro®

OUTPUT: 48...56 VDC  
Current: 10 A



#### Emparro HD

OUTPUT: 24...28 VDC  
Current: 10 A



Ordering data	Art. No.	Art. No.	Art. No.	Art. No.
For mounting rail	85437	85438	85439	
Fastening with screws	85722	85723	85724	85449
Coated PCB			87439	
<b>Input</b>				
Input voltage	85...265 VAC/90...250 VDC			
Input current	1.2 A (100 V AC); 0.6 A (240 V AC)	2.6 A (100 V AC); 1.1 A (240 V AC)	5.1 A (100 V AC); 2.4 A (240 V AC)	2.6 A (100 V AC); 1.1 A (240 V AC)
Inrush current after 1 ms	max. 3.5 A (230 V AC)	max. 5.5 A (230 V AC)	max. 11 A (230 V AC)	max. 7 A (230 V AC)
<b>Output</b>				
Output voltage	48...56 V DC adjustable			24...28 V DC adjustable
Power boost	150 % for 5 seconds / 120 % continuous			
Efficiency	up to 95 %			
Device protection	short-circuit and overload-protected (output), Current Limiter			
<b>General data</b>				
Holdup time	> 30 ms at 100 V AC			> 30 ms bei 100 V AC
LED display	LED green/red			
Temperature range	-40...+60 °C without derating /60...70 °C Derating (storage temperature -40 ... +85 °C)			
Mounting method	snaps on to the mounting rail TH35 (EN 60715)/with screw fastening			
Dimensions (W x H x D)	123 x 50 x 138 mm	123 x 65 x 138 mm	123 x 85 x 167 mm	111 x 179 x 45 mm
Other	Relay alarm contact for short-circuit, overload and overtemperature			

### EMPARRO HD – HEAVY DUTY

**Perfect for extreme ambient conditions** – The Emparro HD switch-mode power supply is designed for use in particularly tough environments to guarantee a reliable supply of electricity.

The preferred application areas for Emparro HD are areas in which power supply units may be installed in a control cabinet, but are still exposed to a variety of external influences, for example on spreaders (lifting equipment for moving containers), construction cranes, and systems of internal conveyor technology.

The Power Supply units are often found on movable parts and are exposed to high induction voltages or weather elements, like extreme temperatures and high air humidity.



# EMPARRO® 3~

## PREMIUM POWER

### ■ Maximum reliability

- MTBF of 1,000,000 hours
- Integrated gas discharge valve protects from interference pulses
- Up to 95 % efficiency rating

### ■ Optimum performance

- Permanently overload protected – up to 20 %
- Power and hyper boost functions for starting high loads

### ■ Space saving



– 2-/3-phase

– Short-circuit and overload protected

– Alarm contact



### Emparro®

OUTPUT: 24...28 VDC  
Current: 5 A



### Emparro®

OUTPUT: 24...28 VDC  
Current: 10 A



Ordering data	Art. No.	Art. No.
For mounting rail	85690	85691
Fastening with screws	85695	85696
Coated PCB	87690	87691
<b>Input</b>		
Input voltage	3 × 324...572 V AC / 450...745 V DC	
Input current	0.45 A (3 × 360 V AC); 0.3 A (3 × 500 V AC)	0.75 A (3 × 360 V AC); 0.55 A (3 × 500 V AC)
Inrush current after 1 ms	max. 9.5 A (3 × 500 V AC)	max. 9.0 A (3 × 500 V AC)
<b>Output</b>		
Output voltage	adjustable 24 V DC (SELV), ±1%; 24...28 V	
Power Boost	I <sub>out</sub> N × 150% (min. 5 s)	
Efficiency	92.5% (3 × 400 V AC); 91.8% (3 × 480 V AC)	93.7% (3 × 400 V AC); 93.2% (3 × 480 V AC)
Device protection	Short-circuit and overload protected, permanently by 20 % (to 45 °C)	
<b>General data</b>		
Holdup time	min. 25 ms (3 × 360 V AC); 5 A (24 V DC)	min. 45 ms (3 × 500 V AC); 10 A (24 V DC)
LED display	LED (green): OK; LED (red): overload, overheating or short-circuit	
Temperature range	-40...+70 °C, ...+70 °C Derating (storage temperature -40...+85 °C)	
Mounting method	Push-In spring clamp terminals	
Dimensions (W x H x D)	123 x 50 x 138 mm	123 x 65 x 138 mm



- 2-/3-phase
- Short-circuit and overload protected
- Alarm contact



### Emparro®

OUTPUT: 24...28 VDC  
Current: 20A



### Emparro®

OUTPUT: 24...28 VDC  
Current: 40A



Ordering data	Art. No.	Art. No.
For mounting rail	85692	85693
Fastening with screws	85697	85698
Coated PCB	87692	87693
<b>Input</b>		
Input voltage	3 × 324...572 V AC/450...745 V DC	3 × 324...572 V AC/480...745 V DC
Input current	1.3 A (3 × 360 V AC); 1.0 A (3 × 500 V AC)	2.3 A (3 × 360 V AC); 1.6 A (3 × 500 V AC)
Inrush current after 1 ms	max. 13 A (3 × 500 V AC)	max. 14 A (3 × 500 V AC)
<b>Output</b>		
Output voltage	adjustable 24 V DC (SELV), ±1%; 24...28 V	
Power boost	I <sub>out</sub> N × 150% (min. 5 s)	
Efficiency	94.8% (3 × 400 V AC); 94.5% (3 × 480 V AC)	93.7% (3 × 400 V AC); 93.5% (3 × 480 V AC)
Device protection	Short-circuit and overload protected, permanently by 20 % (to 45 °C)	
<b>General data</b>		
Holdup time	min. 40 ms (3 × 500 V AC)	
LED display	LED (green): OK; LED (red): overload, overheating or short-circuit	
Temperature range	-40...+70 °C, ...+70 °C Derating (storage temperature -40...+85 °C)	
Mounting method	Push-In spring clamp terminals	
Dimensions (W x H x D)	123 x 65 x 167 mm	138 x 109 x 182 mm

## AS-INTERFACE



**THE LATEST EMPARRO® VERSION HAS BEEN DESIGNED FOR USE IN AS INTERFACE APPLICATIONS WITH AN OPERATING VOLTAGE OF 30.5 V.**

The Emparro® switch-mode power supply for AS interface applications rounds off this portfolio. The Emparro® 3-phase switch-mode power supply for AS interface applications offers the same high efficiency as all the other Emparro® switch-mode power supplies. The use of three phases brings about a considerable simplification as the structure becomes more transparent. Three-phase switch-mode power supplies are thus very attractive for AS interface applications and Emparro® is the clear first choice.

An advantage in the installation: The Emparro® 3-phase for AS interface applications is extremely compact and only occupies 50 mm on the DIN rail. Push-in connection terminals make connecting cable installation tool-free. No separate decoupling component is required since the Emparro® 3-phase switch-mode power supplies for AS interface applications separate data from power.

### 3-phase operation primary switch mode

– Short-circuit and  
overload-protected  
(current limiter)

– Power boost 150 %



### Emparro

120 W



Ordering data	Current	Art. No.
30...32 V DC	4 A	85383
<b>Input</b>		
Input voltage	3 × 324...572 V AC / 450...745 V DC	
Input current	0.45 A (3 × 360 V AC)	
Inrush current after 1 ms	max. 9.5 A	
<b>Output</b>		
Output voltage	adjustable 30.5 V DC (SELV), ±1% ; 30...32 V	
Power boost	Io ut N × 150% (min. 5 s)	
Degree of efficiency	up to 92.5%	
Device protection	short-circuit and overload-protected, permanent by 20% (up to 45 °C)	
Output circuit	Filter according to AS interface specification	
<b>General data</b>		
MTBF	> 1,000,000 h at 40°	
Holdup time	min. 20 ms (3 × 360 V AC); 5 A (24 V DC)	
LED display	LED green/red	
Standards	EN 60950-1, EN 61204-3, EN 61000-3-2, SEMI F47	
Temperature range	-40...+70 °C, ...+70 °C Derating (storage temperature -40...+85 °C)	
Mounting method	snaps onto the mounting rail T H35 (EN 60715)	
Dimensions (H x W x D)	123 x 50 x 138 mm	
Other	Relay alarm contact for short circuit, overload and overtemperature	

## EMPARRO67



### POWER SUPPLY DIRECTLY NEXT TO THE LOAD

Emparro67 power supply units are specially designed for applications outside the control cabinet. They withstand extreme environmental conditions and can be installed directly in the field, next to the loads.

Power loss is reduced to a minimum, because the voltage is converted from 230 V AC to 24 V DC directly at the load. Therefore, the energy costs are reduced and smaller cabinets can be used.

### DECENTRALIZED INSTALLATION

- Low power loss
- High efficiency of up to 94.2%
- Active PFC
- Ambient temperature up to 85 °C
- Extremely rugged, fully potted IP67 housing
- Contact-safe installation even under full load
- Very flat, compact design

Single-phase,  
primary switch mode

– short-circuit and  
overload-protected  
(current limiter)

– Power boost 150%



#### Emparro67

96 W



#### Emparro67

192 W



Ordering data	Current	Art. No.	Current	Art. No.
	4 A	9000-11112-1962020	8 A	9000-11112-2062020
<b>Input</b>				
Input voltage	90...265 V AC/V DC			
Input current	0.5 A at 240 V AC		0.9 A at 240 V AC	
Inrush current after 1 ms	< 9 A		< 7 A	
<b>Output</b>				
Output voltage	24.1 V DC ± 2%			
Power boost	150 % for 4 seconds			
Degree of efficiency	up to 92.3 %		up to 94.2 %	
Device protection	short-circuit and overload-protected (output), current limiter			
<b>General data</b>				
Holdup time	> 45 ms at 230 V AC		> 35 ms at 230 V AC	
Standards	EN 60950-1, EN 61204-3, EN 55011 B, EN 61000-3-2			
Temperature range	-25...+60 °C (storage temperature -40...+85 °C)/with derating up to 85 °C			
Mounting method	Screw fastening			
Dimensions (H × W × D)	140 × 109 × 51 mm		175 × 109 × 51 mm	

# EMPARRO67 HYBRID

## A NEW DIMENSION OF DECENTRALIZED POWER SUPPLY

The innovative Emparro67 Hybrid power supply unit is an all-rounder with many powerful features:

It not only relocates power supply from the control cabinet to the industrial field, but it also monitors currents using two integrated channels for 24 VDC electronic circuit protection, thus ensuring high operational reliability. An IO-Link interface permits extensive and transparent communication.

- Decentralized power supply
- IO-Link interface provides extensive diagnostics
- Integrated electronic circuit protection



Single-phase,  
primary switch mode

– short-circuit and  
overload-protected  
(current limiter)



**Emparro67 Hybrid**  
240 W



Ordering data	Current	Art. No.
	10 A	85676
<b>Input</b>		
Input voltage	90...265 V AC/VDC	
Input current	1.1 A at 230 V AC	
Inrush current after 1 ms	< 7 A	
PFC	Active	
Connection	7/8" 3-pole, male	
<b>Output</b>		
Output voltage	24.1 V DC $\pm$ 2%	
MICO outputs	2 outputs, 2-pole-switching	
Output current	max. 8 A / channel, max. 10 A total	
Degree of efficiency	up to 93.8%	
Switch-on capacitance	20,000 $\mu$ F / channel	
Connection	7/8" 5-pole, female	
Device protection	short-circuit and overload-protected (output), current limiter	
<b>IO-Link</b>		
Parameter	ON/OFF; tripping current setting, output voltage setting and many more	
Diagnostics	Output voltage, alarm, life cycle and many more	
Connection	M12, plug	
<b>General data</b>		
Holdup time	> 20 ms at 230 V AC	
Standards	EN 60950-1, EN 61204-3, EN 55022, EN 61000-3-2	
MTBF	430,000 h	
Temperature range	-25...+50 °C (storage temperature -40...+85 °C)	
Mounting method	Screw fastening	
Dimensions (H x W x D)	212 x 109 x 51 mm	

## ECO-RAIL-2

### ECO-RAIL-2: FOCUS ON THE ESSENTIALS

Eco-Rail-2 power supply units offer manufacturers of machinery and control cabinets the possibility to supply power to their consumers flexibly and economically. These units provide basic functionality and help to monitor the overall costs in the control cabinet.



### ECO-RAIL-2 HIGHLIGHTS

- Cost efficiency through an excellent price-performance ratio
- Worldwide use, UL certified
- Flexibility due to the range of versions and adjustable output voltage
- Excellent holdup time up to 130 milliseconds
- Practical handling during installation and commissioning

## ECO-POWER

### ECO-POWER POWER SUPPLIES – CONVINCING EFFICIENCY

The power supplies of the Eco-Power series meet all basic requirements of power supplies – and their efficiency is convincing. They feature a slim and compact design. The cooling is based on convection. This makes the power supplies from the Eco-Power series particularly suitable for applications in compact installations and customers' machines. Eco-Power units are available in models from 0.6 to 10 A.



### ECO-POWER HIGHLIGHTS

- Solid perforated housing allows optimum heat dissipation
- Output voltage adjustable from 21.6 to 26.4 V
- Cooling by convection
- Full power with ambient temperatures up to 40° C (105° F)
- Derating up to temperatures of 55° C (130° F)
- Allow operation in series connection
- Flat and compact design
- Easily adjustable wide voltage input
- Screw terminals (IP00) with touch protection

## ECO-RAIL-2

### Single-phase

– short-circuit and  
overload-protected



#### Eco-Rail-2

OUTPUT: 23...28 V DC  
Current: 1.3 A



#### Eco-Rail-2

OUTPUT: 23...28 V DC  
Current: 2.5 A



#### Eco-Rail-2

OUTPUT: 23...28 V DC  
Current: 5 A



Ordering data	Art. No.	Art. No.	Art. No.
24 V DC	85131	85132	85133
<b>Input</b>			
Input voltage	100...240 V AC		
Input current	0.7 A (100 V AC); 0.4 A (240 V AC)	1.3 A (100 V AC); 0.6 A (240 V AC)	2.4 A (100 V AC); 1.2 A (240 V AC)
Inrush current after 1 ms	max. 10 A (230 V AC)		max. 20 A (230 V AC)
<b>Output</b>			
Output voltage	adjustable 24 V DC $\pm 1\%$ ; 23...28 V		
Output current	1.3 A (+40 °C); 1.0 A (+55 °C)	2.5 A (+40 °C); 2.0 A (+55 °C)	5 A (+40 °C); 4 A (+55 °C)
Efficiency	83% (115 V AC); 84% (230 V AC)	84% (115 V AC); 85% (230 V AC)	87% (115 V AC); 88% (230 V AC)
Unit protection	Short-circuit and overload protected		
Parallel operation/serial operation	no/yes (max. 2 units)		
<b>General data</b>			
Standards	EN 60950-1, EN 61204-3, EN 61000-3-2		
Temperature range	0...+40 °C, ...+55 °C derating (storage temperature -20...+85 °C)		
Mounting method	DIN-rail mountable TH35 (EN 60715)		
Dimensions (W x H x D)	125 x 50 x 72 mm	125 x 50 x 84 mm	125 x 50 x 123 mm
Connection	Screw terminals		

### Single-phase

– short-circuit and  
overload-protected



#### Eco-Rail-2

OUTPUT: 23...28 V DC  
Current: 10 A



#### Eco-Rail-2

OUTPUT: 23...28 V DC  
Current: 20 A



Ordering data	Art. No.	Art. No.
24 V DC	85135	85137
<b>Input</b>		
Input voltage	90...132 V AC/173...264 V AC	
Input current	4.3 A (100 V AC); 2.1 A (240 V AC)	7.8 A (100 V AC); 4.0 A (200 V AC)
Inrush current after 1 ms	max. 18 A (230 V AC)	
<b>Output</b>		
Output voltage	adjustable 24 V DC $\pm 1\%$ ; 23...28 V	
Output current	10 A (+40 °C); 7.5 A (+55 °C)	20 A (+40 °C); 16 A (+55 °C)
Efficiency	86% (115 V AC); 87% (230 V AC)	89% (115 V AC); 90% (230 V AC)
Unit protection	Short-circuit and overload protected	
Parallel operation/serial operation	no/yes (max. 2 units)	
<b>General data</b>		
Standards	EN 60950-1, EN 61204-3, EN 61000-3-2	
Temperature range	0...+40 °C, ...+55 °C derating (storage temperature -20...+85 °C)	
Mounting method	DIN-rail mountable TH35 (EN 60715)	
Dimensions (W x H x D)	125 x 68 x 125 mm	124 x 105 x 124 mm
Connection	Screw terminals	

## ECO-POWER

### Single-phase operation primary switch mode

#### Eco-Power

Current: 0,6 A / 15 W

#### Eco-Power

Current: 1,3 A / 30 W

#### Eco-Power

Current: 2,5 A / 60 W

#### Eco-Power

Current: 5,0 A / 120 W



Ordering data	Art. No.	Art. No.	Art. No.	Art. No.
24 V DC	85150	85151	85152	85153
<b>Input</b>				
Nominal voltage	90...264 V AC			
Input current	0.3 A (115 V AC); 0.2 A (230 V AC)	0.7 A (115 V AC); 0.4 A (230 V AC)	1.2 A (115 V AC); 0.5 A (230 V AC)	2.4 A (115 V AC); 1.0 A (230 V AC)
Inrush current	max. 20 A			
<b>Output</b>				
Adjustable output voltage	24 V DC (SELV) $\pm 1\%$ ; 21.6...26.4 V DC			
Nominal output current	0.6 A (+40 °C); 0.5 A (+50 °C)	1.3 A (+40 °C); 1.04 A (+50 °C)	2.5 A (+40 °C); 2.0 A (+50 °C)	5.0 A (+40 °C); 4.0 A (+50 °C)
Efficiency	85 % (115 V AC); 87 % (230 V AC)	85 % (115 V AC); 85 % (230 V AC)	85 % (115 V AC); 87 % (230 V AC)	86 % (115 V AC); 87 % (230 V AC)
Device protection	short-circuit and overload-protected (Hiccup mode)			
Parallel operation/serial operation	no/yes, max. 2 devices			
<b>General data</b>				
Standards	EN 60950-1, EN 61204-3, EN 55011 B			
Temperature range	0...+40 °C, to +50 °C derating (storage temperature -20...+85 °C)			
Mounting method	screw fastening, M3			
Dimensions (W x H x D)	36 x 105 x 77 mm	40 x 135 x 98 mm	41 x 164 x 98 mm	

### Single-phase operation primary switch mode

#### Eco-Power

Current: 7,5 A / 180 W

#### Eco-Power

Current: 10 A / 240 W



Ordering data	Art. No.	Art. No.
24 V DC	85154	85155
<b>Input</b>		
Nominal voltage	90...132 V AC, 180...264 V AC	
Input current	3.4 A (115 V AC); 1.9 A (230 V AC)	4.6 A (115 V AC); 2.8 A (230 V AC)
Inrush current	max. 20 A	max. 25 A
<b>Output</b>		
Adjustable output voltage	24 V DC (SELV) $\pm 1\%$ ; 21.6...26.4 V DC	
Nominal output current	7.5 A (+40 °C); 6.0 A (+50 °C)	10 A (+40 °C); 8.0 A (+50 °C)
Degree of efficiency	85 % (115 V AC); 86 % (230 V AC)	84 % (115 V AC); 85 % (230 V AC)
Device protection	short-circuit and overload-protected (current limiter)	
Parallel operation/serial operation	no/yes, max. 2 devices	
<b>General data</b>		
Standards	EN 60950-1, EN 61204-3, EN 55011 B	
Temperature range	0...+40 °C, to +50 °C derating (storage temperature -20...+85 °C)	
Mounting method	screw fastening, M3	screw connection, M4
Dimensions (W x H x D)	50 x 205 x 100 mm	50 x 230 x 115 mm

# MICO — ELECTRONIC CIRCUIT PROTECTION

## SAFE AND WELL DISTRIBUTED

Combine your power supplies with MICO, the intelligent power distribution system.

MICO is the intelligent power distribution module from Murrelektronik for 24 VDC and 48 VDC. It monitors currents, indicates when approaching the maximum load and ensures machine availability.

Our suggestion: Combine your power supplies with MICO. You can choose between **Mico Pro®** for modular requirements, **MICO+** with channels that can be switched off and a digital signal with a 90 % warning, **MICO CLASSIC** with adjustable current ranges, **MICO BASIC** with preset nominal currents and **MICO FUSE** with sockets for glass tube fuses.

**MICO modules with NEC Class 2 approval** are available to design load circuits with limited energy, in a simple and cost effective way.



MICO+ 24 V	Description	Adjustable voltage ranges	Art. No.
	MICO+ 4.4, 4-channel**	1, 2, 3, 4 A	9000-41084-0100400
	MICO+ 4.6, 4-channel	1, 2, 4, 6 A	9000-41084-0100600
	MICO+ 4.10, 4-channel	4, 6, 8, 10 A	9000-41084-0401000
MICO Classic 24 V	Description	Adjustable voltage ranges	Art. No.
	MICO Classic 2.4, 2-channel**	1, 2, 3, 4 A	9000-41042-0100400
	MICO Classic 2.6, 2-channel	1, 2, 4, 6 A	9000-41042-0100600
	MICO Classic 2.10, 2-channel	4, 6, 8, 10 A	9000-41042-0401000
	MICO Classic 4.4, 4-channel**	1, 2, 3, 4 A	9000-41034-0100400
	MICO Classic 4.6, 4-channel*	1, 2, 4, 6 A	9000-41034-0100600
	MICO Classic 4.10, 4-channel*	4, 6, 8, 10 A	9000-41034-0401000
	MICO Classic 4.4.10 Actuator-Sensor 4-channel	2x 1, 2, 3, 4, 2x 4, 6, 8, 10 A	9000-41034-0101000
MICO Classic 4.10 Speed-Start 4-channel	4, 6, 8, 10 A	9000-41034-0401005	
MICO Basic 24 V	Description	Pre-fixed voltage ranges	Art. No.
	MICO Basic 4.2, 4-channel**	2 A	9000-41064-0200000
	MICO Basic 4.4, 4-channel**	4 A	9000-41064-0400000
	MICO Basic 4.6, 4-channel*	6 A	9000-41064-0600000
	MICO Basic 8.2, 8-channel**	2 A	9000-41068-0200000
	MICO Basic 8.4, 8-channel**	4 A	9000-41068-0400000
	MICO Basic 8.6, 8-channel*	6 A	9000-41068-0600000
	MICO Basic 5.2/3.6, 8-channel**	5x2 A ; 3x6 A	9000-41068-0200600
MICO Basic 2.1/3.2/3.4	2x1 A ; 3x2 A ; 3x4 A	9000-41068-0100304	
MICO+ 48 V	Description	Adjustable voltage ranges	Art. No.
	MICO+ 4.4, 4-channel**	1, 2, 3, 4 A	9000-42084-0100400
	MICO+ 4.6, 4-channel	1, 2, 4, 6 A	9000-42084-0100600
MICO Fuse 0...250 V	Description	Miscellaneous	Art. No.
	MICO Fuse 24 LED	Delivery without fuses, with LED display and signal contact, 24 V DC	9000-41078-0600001
	MICO Fuse 250	Delivery without fuses, Universal versions ranging from 0...250 V AC/DC	9000-41078-0600002
Note	<p>* With DNV-GL approval For more information, see the <a href="http://onlinehop.murrelektronik.com">onlinehop.murrelektronik.com</a> or request our main catalog.</p> <p>** With NEC Class 2 approval</p>		





## CURRENT MONITORING MODULARIZED





**Mico Pro®** is the new and innovative current monitoring system from Murrelektronik. The modular system enables you to adapt systems precisely to suit specific applications – offering a favorable cost-benefit ratio while also being economical in their use of space.

The patented tripping process assures optimum machine availability. An additional benefit: an integrated concept for potential distribution that significantly declutters the switch cabinet wiring.

**Mico Pro®** signals limit loads and switches defective channels off in a targeted manner to prevent total system crashes, and to assure a high level of machine availability.

The tripping process has been patented, and follows the rule: “as late as possible, as early as necessary”.



Power module		Description	Art. No.	
	Mico Pro PM 24 V DC/40 A	Power module, max. 40 A	9000-41190-0000000	
Modules with pre-fixed tripping current	Number of channels	Tripping current (pre-fixed)	Art. No.	
	Mico Pro fix 1.2	1	2 A	9000-41011-0200000
	Mico Pro fix 1.4	1	4 A	9000-41011-0400000
	Mico Pro fix 1.6	1	6 A	9000-41011-0600000
	Mico Pro fix 1.8	1	8 A	9000-41011-0800000
	Mico Pro fix 1.10	1	10 A	9000-41011-1000000
	Mico Pro fix 1.16	1	16 A	9000-41011-1600000
	Mico Pro fix 2.2	2	2 A	9000-41012-0200000
	Mico Pro fix 2.4	2	4 A	9000-41012-0400000
	Mico Pro fix 2.6	2	6 A	9000-41012-0600000
	Mico Pro fix 4.2	4	2 A	9000-41014-0200000
	Mico Pro fix 4.4	4	4 A	9000-41014-0400000
	Mico Pro fix 4.6	4	6 A	9000-41014-0600000

# MICO PRO®



## MICO PRO® STANDS FOR:

- **Modularity**  
– precise right down to the last channel
- **Integrated potential distribution concept**  
– significantly simplifies switch cabinet wiring
- **Practical handling**  
– assembly without tools
- **Diagnostics**  
– on the module or via the PLC
- **Channel-specific switching**  
– replaces the coupling level

Modules with adjustable tripping current		Number of channels	Tripping current (flexible adjustment)	Art. No.
	Mico Pro flex 1.10	1	1-2-3-4-5-6-7-8-9-10 A	9000-41091-0101000
	Mico Pro flex 1.20	1	11-12-13-14-15-16-17-18-19-20 A	9000-41091-1102000
	Mico Pro flex 2.10	2	1-2-3-4-5-6-7-8-9-10 A	9000-41092-0101000
	Mico Pro flex 4.10	4	1-2-3-4-5-6-7-8-9-10 A	9000-41094-0101000
Accessories	Description		Art. No.	
	Mico Pro PD2x12	Potential distributors, 2x 12 potentials, max 20 A	9000-41000-0000212	
	Mico Pro PD2x6	Potential distributors, 2x 6 potentials, max 20 A	9000-41000-0002206	
	Mico Pro Plug-In link 2x blue	Continuous jumper max. 40 A, 500 mm length	9000-41190-0000000	
	Mico Pro Plug-In link 2x red	Continuous jumper max. 40 A, 500 mm length	9000-41000-0000001	
	Mico Pro Plug-In link 1x blue 1x red	Continuous jumper max. 40 A, 500 mm length	9000-41000-0000002	
	Identification label	5x10 mm, white, 64 units	996078	

# THE REDUNDANCY MODULES




## STOCK UP ON SAFETY!

Having the highest machine availability is an important subject. That's why power supply systems are often redundantly designed, with two power supply units. Murrelektronik's redundancy modules decouple two independent power supply units and generate redundant 24 V DC control voltages.

MB Redundancy Balance ensures automatic 50:50 balancing of power between the two units. For example: if the required load current is 10 A, this cabinet component ensures that both units supply 5 A. If one of the two power supply units fails, the other can continue to work because it is decoupled. The only condition is that each unit is in the position to supply the nominal current of the load.

### FOR EVEN LOAD OF BOTH POWER SUPPLY UNITS IN ACCORDANCE

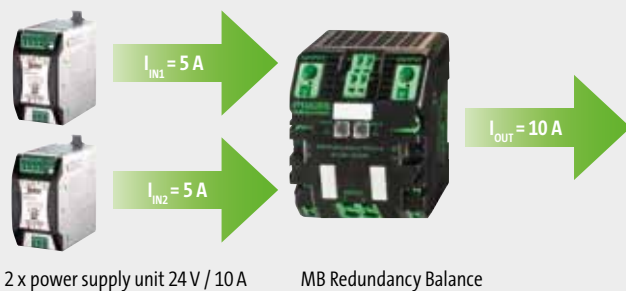

### SIMPLE CONNECTION



With the integrated bridging system, MB Redundancy Balance can be directly combined with the electronic load circuit control module MICO, without requiring wiring work.

Ordering data	MB Diode	Art. No.	MB Redundancy Basic	Art. No.	MB Redundancy Balance	Art. No.
24 V DC		85396		85495		85496
<b>Input</b>						
Nominal voltage	24 V DC					
Voltage range	21...30 V DC		18...30 V DC			
Nominal current	2 x 20 A / 1x 40 A		2 x 20 A			
Total current	max. 40 A		max. 52 A			
Polarity	int. protection against reverse polarity up to 60 V DC		int. protection against reverse polarity up to 30 V DC			
<b>Output</b>						
Nominal output current	20 A (-25...+55 °C); 40 A (-25...+40 °C)		40 A (-25...+60 °C); 52 A (-25...+40 °C)			
Status display	1 LED per channel					
Signal output (potential-free)	input voltages		input voltages		input voltages / load distribution	
<b>General data</b>						
Connecting type	Spring clamp terminal					
Standards	EN 61000-6-2, EN 61000-6-3					
Bridging concept	both sides using spring clamp terminal or bridge set					
Degree of efficiency	> 97 %		> 99.5 %			
Mounting method	snaps on to the mounting rail TH 35 (EN 60715)					
Approvals	UL					

# MB CAP — BUFFER MODULES








## STABLE POWER SUPPLY. SAFE PROCESSES.

Murrelektronik's MB Cap Ultra modules are buffer modules that ensure a stable power supply, guaranteeing secure industrial processes. They store energy and bridge voltage fluctuations of up to 38 seconds at 10 A, or for several minutes at 1 A, thanks to maintenance-free ultra capacitors.



current	Buffer time Seconds										Minutes						
	0.1	0.2	0.5	1	3.6	4	7	16	21	38	1	2	4	3	5	6	7
1 A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3 A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
5 A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
10 A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
20 A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
40 A	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

- MB Cap 20/24 A, 0,2 sec | 85394
- MB Cap Ultra 3/24 A, 7 sec | 85460
- MB Cap Ultra 10/24 A, 38 sec | 85467
- Emparro Cap 20/24 A, 1,0 sec | 85458
- MB Cap Ultra 20/24 A, 16 sec | 85468
- MB Cap Ultra 40/24 A, 3,6 sec | 85469
- Emparro Cap 20/48 A, 0,1 sec | 85459

Model	Description	Art. No.
 <b>MB Cap 20/24 200ms</b>	<b>Description</b> Nominal voltage: 23...30 V DC, output voltage: 22...28 V DC, max. output current: 20 A Buffer time: 0.2 sec/20 A, 4 sec/1 A Nominal voltage: 23...30 V DC, output voltage: 22...28 V DC, max. output current: 20 A Buffer time: 0.2 sec/20 A, 4 sec/1 A, Coated PCB	<b>85394</b>  <b>85184</b>
 <b>MB Cap Ultra 3/24 7s</b>	<b>Description</b> Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 3 A Buffer time: 7 sec/3 A, 21 sec/1 A <b>MB Cap Ultra expansion module 3/24 12s</b> Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 3 A Buffer time: 12 sec/3 A, 36 sec/1 A	<b>85460</b>  <b>85462</b>
 <b>MB Cap Ultra 10/24 38s</b>	<b>Description</b> Nominal voltage: 12 V/24 V DC, output voltage: 12 V/24 V DC, max. output current: 10 A Buffer time: 38 sec/10 A, > 6 min/1 A The MB Cap Ultra Control software and the manual are available for download under <a href="http://www.murrelektronik.com">www.murrelektronik.com</a>	<b>85467</b>
 <b>Emparro Cap 20/24 1.0s</b>	<b>Description</b> Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 20 A Buffer time: 1.0 sec/20 A	<b>85458</b>
 <b>MB Cap Ultra 20/24 16s</b>	<b>Description</b> Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 20 A Buffer time: 16 sec/20 A, > 5 min/1 A The MB Cap Ultra Control software and the manual are available for download under <a href="http://www.murrelektronik.com">www.murrelektronik.com</a>	<b>85468</b>
 <b>MB Cap Ultra 40/24 3.6s</b>	<b>Description</b> Nominal voltage: 24 V DC, output voltage: 24 V DC, max. output current: 40 A Buffer time: 3.6 sec/40 A, 170 sec/1 A	<b>85469</b>
 <b>Emparro Cap 20/48 0.1s</b>	<b>Description</b> Nominal voltage 48 VDC, output voltage: 48 VDC, max. output current 20A Buffer time: 0.1 sec/20A, 2.5 sec/1A	<b>85459</b>

## EMPARRO ACCUCONTROL



### KEEPING MACHINES RUNNING

The UPS module Emparro ACCUcontrol supplements the powerful Emparro power supply system. If there is a power failure, it switches to battery mode without interrupting power, thus preventing machine downtimes. Investment in a UPS system frequently pays for itself after the first failure is prevented.

External lead batteries with a capacity of up to 40 Ah ensure a long-lasting autonomy time. Emparro ACCUcontrol can be assembled without a tool and is maintenance-free.

The 20-A version is only 65 millimeters wide and therefore takes up very little space in the control cabinet.

### RELIABLE POWER SUPPLY IN CASE OF MALFUNCTION

- Avoid machine downtimes in case of a power outage
- Maximum service life due to temperature-controlled battery charging
- High operating reliability due to comprehensive control and diagnostic options
- Prevent data loss using the shutdown function for IPCs

#### UPS-System

– up to 40 Ah

– comprehensive diagnostics



#### Emparro ACCUcontrol



#### Emparro ACCUcontrol



Ordering data	Current	Art. No.	Current	Art. No.
	20 A	85414	40 A	85415
<b>Input</b>				
Input voltage	21.6...30 VDC (buffer operation)			
Input current	max. 23 A		max. 43 A	
Charging current	2 A			
<b>Output</b>				
Output voltage	27.2...19.2 VDC			
Output current	max. 20 A		max. 40 A	
<b>Control inputs</b>				
Input voltage (SH)	24 V DC (6...45 VDC), potential free			
<b>Control outputs</b>				
Battery (BAT OK)	min. 5 VDC, 1 mA; max. 30 VDC, 100 mA			
Input voltage (UIN OK)	min. 5 VDC, 1 mA; max. 30 VDC, 100 mA			
<b>General data</b>				
Connecting type	> Push-In Spring clamp terminal, Mini-USB			
Mounting method	Snaps onto mounting rails TH35-7.5/TH 35-15 (EN 60715)			
Temperature range	-25...+45 °C			
Dimensions (W x H x D)	123 x 65 x 138 mm		123 x 85 x 138 mm	

## Predictive Maintenance

### Get informed before failure

Emparro ACCUcontrol permanently monitors the internal resistance of connected batteries. If limits are exceeded, the device gives a warning signal over an alarm contact. The battery replacement can then be scheduled for the next maintenance period. This predictive information prevents unplanned failures from happening and keeps you from having to send service technicians into the field for small jobs.

## Maximum life time

### The cooler, the better

Batteries perform better and they live longer in cooler temperatures. As a result, Emparro ACCUcontrol can charge batteries based on temperature. The charging voltage is adapted to the ambient temperature. This feature allows you to achieve maximum battery life, even in a high temperature environment.

Accessories			Art No.
	<b>Lead battery</b> 1.2 Ah 96×69×105 mm/2 kg	for Emparro® ACCUcontrol	<b>89550</b>
	<b>Lead battery</b> 7 Ah 115×174.5×159 mm/2.32 kg	for Emparro® ACCUcontrol	<b>89552</b>
	<b>Lead battery</b> 12 Ah 115×240.5×159 mm/3.7 kg	for Emparro® ACCUcontrol	<b>89553</b>
	<b>Lead battery</b> 17 Ah 170×155×182 mm/18 kg	for Emparro® ACCUcontrol	<b>89554</b>
	<b>Lead battery</b> 24 Ah 137×335×200 mm/20 kg	for Emparro® ACCUcontrol	<b>89555</b>

## TRANSFORMERS WITH MULTI-VOLTAGE INPUT



### STOCK UP ON SAFETY!

A switch-mode power supply unit doesn't match your requirements? Murrelektronik's transformers or rectified power supplies offer another option!


Plant and system manufacturers with international customers are familiar with the problem of different mains voltages. The new Murrelektronik transformer with multi-voltage input features clear advantages: This universal solution can handle input voltages from 208 to 550 V. This is ideal for companies who have customers all over the world.

The new Murrelektronik transformers with multi-voltage input are suitable for worldwide use. They feature a flexible selection of input voltages and can be adapted to the different mains voltages by simple bridging. The same transformer can be used for any machine, worldwide. A total of eleven different input voltages from 208 to 550 Volts are pre-configured.

The new Murrelektronik transformers are available with two times 115 Volts or – with series connection – 230 Volts. This makes it possible to conveniently handle the various operating voltages of the machines.

Power	Input	Output	Art. No.
25 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86140
40 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86141
63 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86142
100 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86143
160 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86144
250 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86145
320 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86146
400 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86147
500 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86148
630 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86149
800 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86150
1000 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86151
1600 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86152
2000 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86153
2500 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86154
3000 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86155
4000 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86156
5000 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86157
6300 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86158
8000 VA	208/230/380/400/420/440/460/480/500/525/550 V AC	2 x 115 V AC	86159

## SAFETY TRANSFORMERS


MTS	Power	Input	Output	Art. No.
	40 VA	230/400 V AC	24 V AC	86340
	63 VA	230/400 V AC	24 V AC	86341
	100 VA	230/400 V AC	24 V AC	86342
	160 VA	230/400 V AC	24 V AC	86343
	250 VA	230/400 V AC	24 V AC	86345
	40 VA	230/400 V AC ± 15 V	24 V AC	86360
	63 VA	230/400 V AC ± 15 V	24 V AC	86361
	100 VA	230/400 V AC ± 15 V	24 V AC	86362
	160 VA	230/400 V AC ± 15 V	24 V AC	86363
	250 VA	230/400 V AC ± 15 V	24 V AC	86365
MST	Power	Input	Output	Art. No.
	320 VA	230/400 V AC	24 V AC	86326
	400 VA	230/400 V AC	24 V AC	86327
	500 VA	230/400 V AC	24 V AC	86328
	630 VA	230/400 V AC	24 V AC	86329
	800 VA	230/400 V AC	24 V AC	86330
	1000 VA	230/400 V AC	24 V AC	86331
MET	Power	Input	Output	Art. No.
	500 VA	230 V AC ± 5 V	24 V AC	86023
	630 VA	230 V AC ± 5 V	24 V AC	86033
	800 VA	230 V AC ± 5 V	24 V AC	86043
	1000 VA	230 V AC ± 5 V	24 V AC	86053
	500 VA	400 V AC ± 5 V	24 V AC	86024
	630 VA	400 V AC ± 5 V	24 V AC	86034
	800 VA	400 V AC ± 5 V	24 V AC	86044
	1000 VA	400 V AC ± 5 V	24 V AC	86054
MTL	Power	Input	Output	Art. No.
	25 VA	230/400 V AC ± 15 V	2 x 24 V AC	86450
	40 VA	230/400 V AC ± 15 V	2 x 24 V AC	86451
	63 VA	230/400 V AC ± 15 V	2 x 24 V AC	86452
	100 VA	230/400 V AC ± 15 V	2 x 24 V AC	86453
	160 VA	230/400 V AC ± 15 V	2 x 24 V AC	86454
	250 VA	230/400 V AC ± 15 V	2 x 24 V AC	86455
	320 VA	230/400 V AC ± 15 V	2 x 24 V AC	86456
	400 VA	230/400 V AC ± 15 V	2 x 24 V AC	86457
	630 VA	230/400 V AC ± 15 V	2 x 24 V AC	86463
	1000 VA	230/400 V AC ± 15 V	2 x 24 V AC	86464
	1600 VA	230/400 V AC ± 15 V	2 x 24 V AC	86465
	2500 VA	230/400 V AC ± 15 V	2 x 24 V AC	86466



## CONTROL AND ISOLATION TRANSFORMERS

MTS	Power	Input	Output	Art. No.	
	40 VA	230/400 V AC	230 V AC	86346	
	63 VA	230/400 V AC	230 V AC	86347	
	100 VA	230/400 V AC	230 V AC	86348	
	160 VA	230/400 V AC	230 V AC	86349	
	250 VA	230/400 V AC	230 V AC	86351	
	40 VA	230/400 V AC ± 15 V	230 V AC	86366	
	63 VA	230/400 V AC ± 15 V	230 V AC	86367	
	100 VA	230/400 V AC ± 15 V	230 V AC	86368	
	160 VA	230/400 V AC ± 15 V	230 V AC	86369	
	250 VA	230/400 V AC ± 15 V	230 V AC	86371	
MST	Power	Input	Output	Art. No.	
	320 VA	230/400 V AC	230 V AC	86306	
	400 VA	230/400 V AC	230 V AC	86307	
	500 VA	230/400 V AC	230 V AC	86308	
	630 VA	230/400 V AC	230 V AC	86309	
	800 VA	230/400 V AC	230 V AC	86310	
	1000 VA	230/400 V AC	230 V AC	86311	
MET	Power	Input	Output	Art. No.	
	500 VA	230 V AC ± 5 %	230 V AC	86020	
	630 VA	230 V AC ± 5 %	230 V AC	86030	
	800 VA	230 V AC ± 5 %	230 V AC	86040	
	1000 VA	230 V AC ± 5 %	230 V AC	86050	
	1500 VA	230 V AC ± 5 %	230 V AC	86060	
	2000 VA	230 V AC ± 5 %	230 V AC	86070	
	3000 VA	230 V AC ± 5 %	230 V AC	86090	
	4000 VA	230 V AC ± 5 %	230 V AC	86110	
	5000 VA	230 V AC ± 5 %	230 V AC	86130	
	500 VA	400 V AC ± 5 %	230 V AC	86021	
	630 VA	400 V AC ± 5 %	230 V AC	86031	
	800 VA	400 V AC ± 5 %	230 V AC	86041	
	1000 VA	400 V AC ± 5 %	230 V AC	86051	
	1500 VA	400 V AC ± 5 %	230 V AC	86061	
	2000 VA	400 V AC ± 5 %	230 V AC	86071	
	3000 VA	400 V AC ± 5 %	230 V AC	86091	
	4000 VA	400 V AC ± 5 %	230 V AC	86111	
	5000 VA	400 V AC ± 5 %	230 V AC	86131	
	MTL	Power	Input	Output	Art. No.
		25 VA	230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86470
40 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86471	
63 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86472	
100 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86473	
160 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86474	
250 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86475	
320 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86476	
400 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86477	
630 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86483	
1000 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86484	
1600 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86485	
2500 VA		230/400 V AC ± 15 V	2 x 115 V AC oder 1 x 230 V AC	86486	

## NOTES

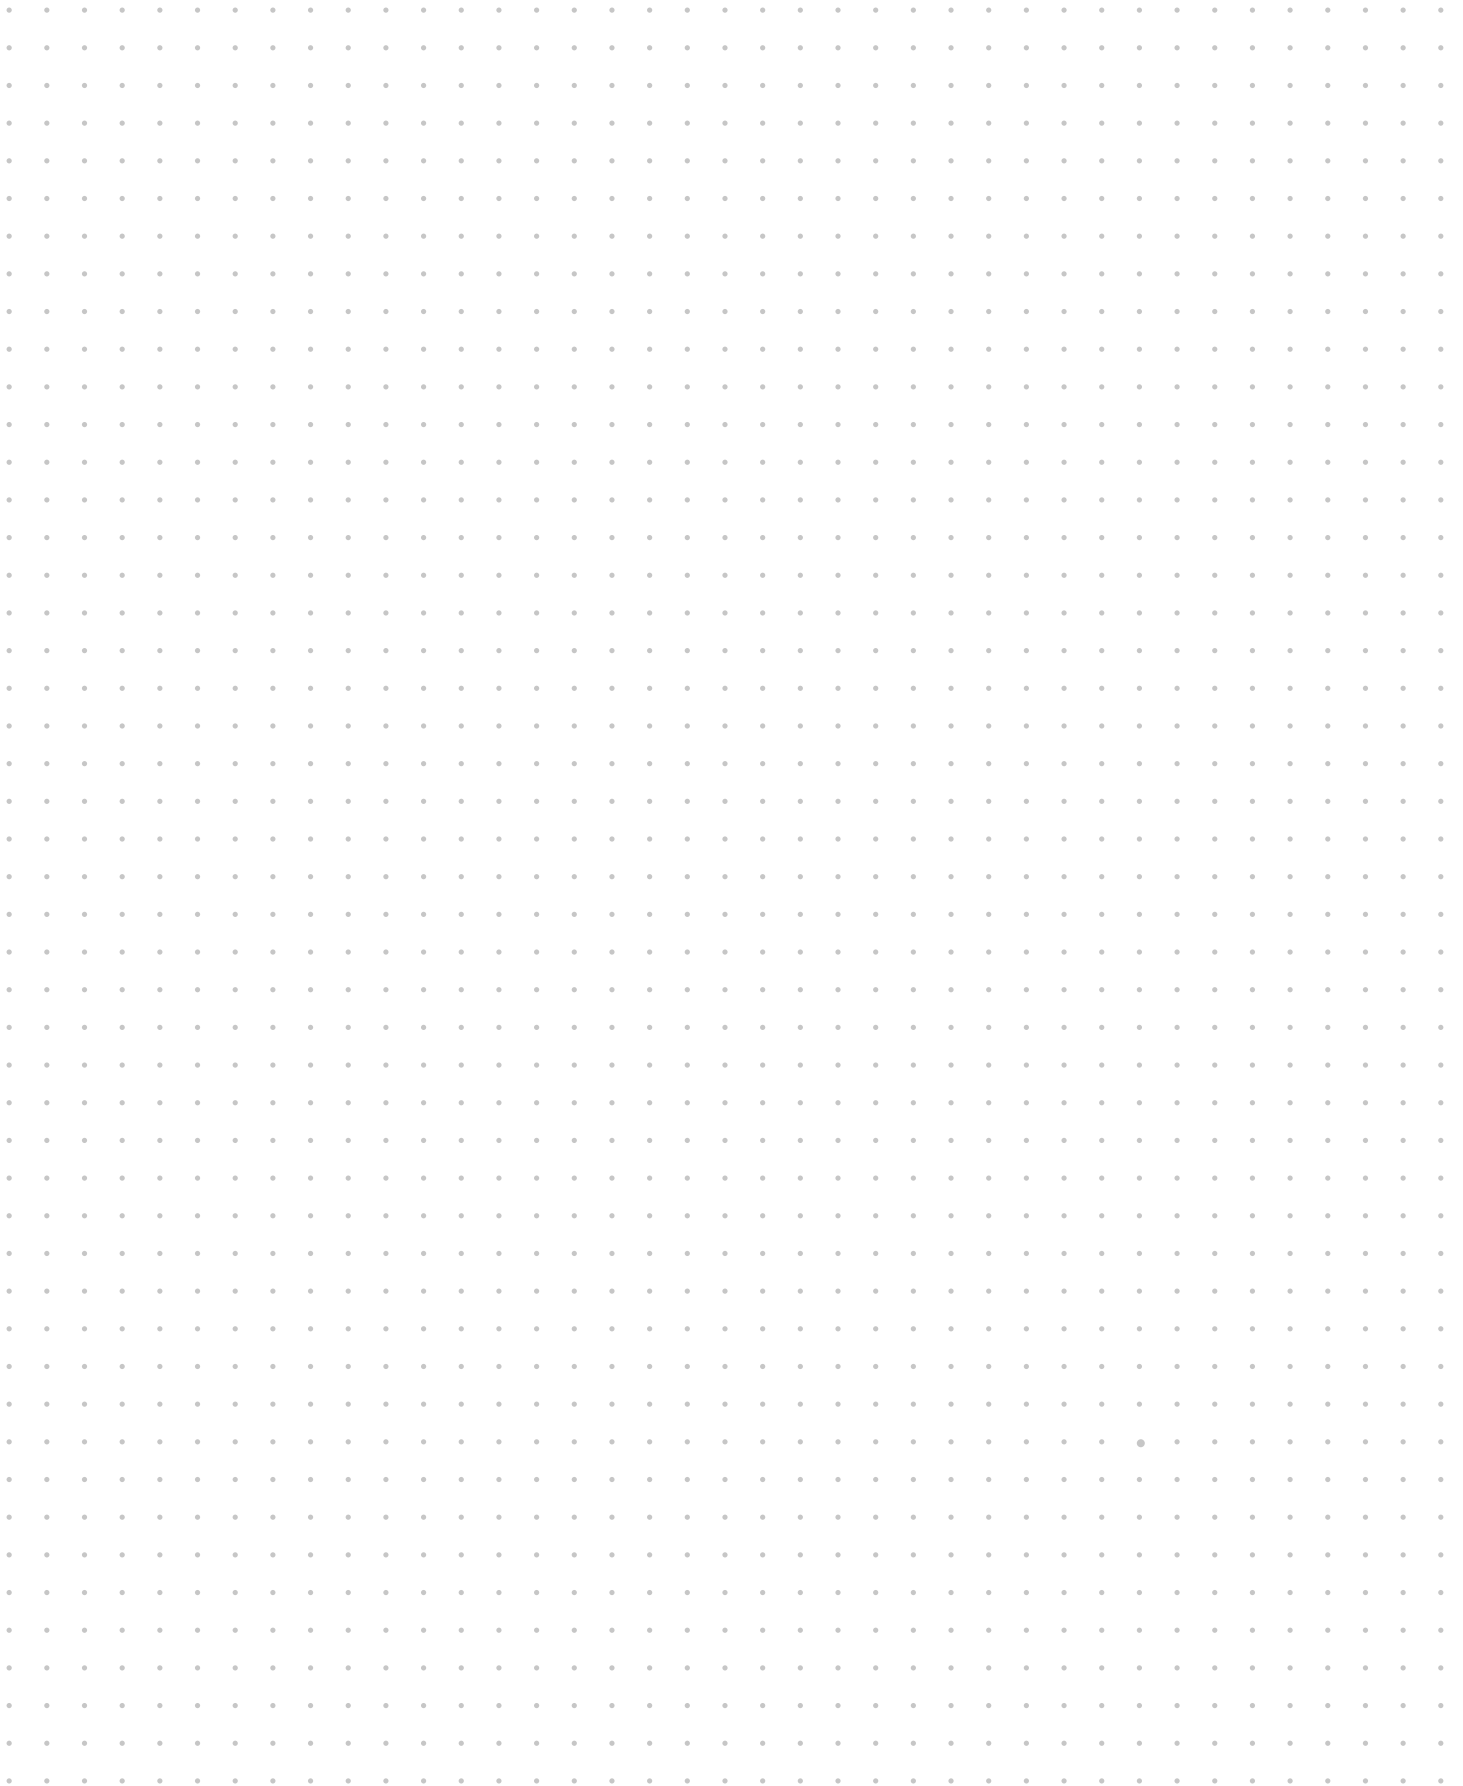





*stay connected*

➔ [www.murrelektronik.com](http://www.murrelektronik.com)

The information provided in this brochure has been compiled with utmost care.  
Liability for the correctness, completeness and topicality of the information is restricted to  
gross negligence.

Our company embraces social responsibility in all aspects of our business activities.  
Our brochures are printed using environmentally friendly production techniques and products.

