



Product designation	Selector switch actuators short lever - 2 position
Product type designation	8LM2TS1

General characteristics

Type of positions	Maintained
Material	Aluminium and zinc alloy
IEC degree of protection	IP65

Mechanical features

Mechanical life	cycles	300000
Mounting adapter		LM2TAU120
Weight	g	49


UL technical data

UL degree of protection	Type 1, 2, 3R, 4, 4X, 12, 12K
-------------------------	-------------------------------

Ambient conditions

Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+60
	Storage temperature			
		min	°C	-40
		max	°C	+70

Dimensions

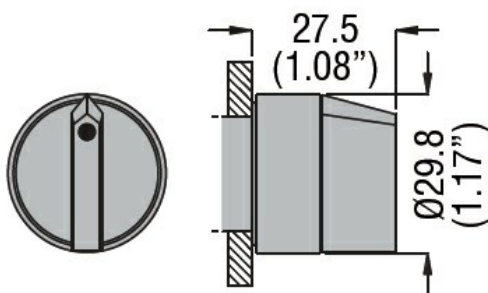

Certifications and compliance

Compliance	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508

Certificates	CCC
	cULus
	EAC
	LROS

RINA

ETIM classification

ETIM 8.0

EC000222 -
Front element for
selector switch