





# V-BOX H-00/WF/4G/AG



( Screw mount )

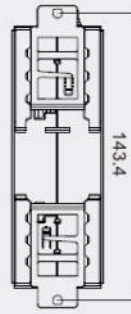

( Din rail )

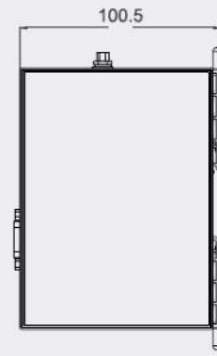

## General



### Model

H-00\*

H-WF\*

H-4G\*

H-AG\*

		Linux				
Hardware	OS	Linux				
	CPU	Cortex A7 528MHz				
	Storage	Flash	128MB			
		RAM	DDRIII 128MB			
	Ports	MICRO USB	HOST/DEVICE: USB OTG Switch			
		Serial Port	COM1: RS232, RS422/RS485 (2 in 1)		COM2: RS485	
			RS485(2 in 1)		COM2: RS485	
		Ethernet	3 Ethernet Ports			
		WIFI Module	N/A	YES	N/A	N/A
		2G/4G Module	N/A	N/A	4G	4G Global
	I/O	2 inputs with optocoupler isolation; 2 relay outputs				
	Power	Power Supply	24VDC (12~28VDC)			
		Power Consumption	<10w			
	Dimension	Enclosure	PC+ABS			
		Dimension (W*H*D)	131.0mm*100.5mm*46.0mm			
		Weight (KG)	0.3			
Environment	Vibration Resistance	IEC61131-2 Standard				
	Storage Temperature	-20°C~70°C				
	Working Temperature	-10°C~60°C				
	Relative Humidity	10~85%RH (Non-condensing)				
CE Certification		CE Marked				
FCC Certification		FCC Class A				
Software	Real-time Monitoring Points	300	300	500	600	
	Alarm Monitoring Points	200	200	300	300	
	History Monitoring Points	50	50	100	100	
	History Storage	90 days	90 days	180 days	180 days	
	Normal Pass-through	YES				
	VPN Pass-through	N/A	N/A	YES	YES	
	Edge Computing	YES				
	API Interface	YES				
	Remote Update	YES				
	Configuration download / upload	YES				
	Off-line Transmission	YES				
	GPS	Optional				