


Data sheet | Item number: 857-401


Isolation amplifier; Current and voltage input signal; Current and voltage output signal; Digital output; Supply voltage: 24 VDC; 6 mm module width



www.wago.com/857-401

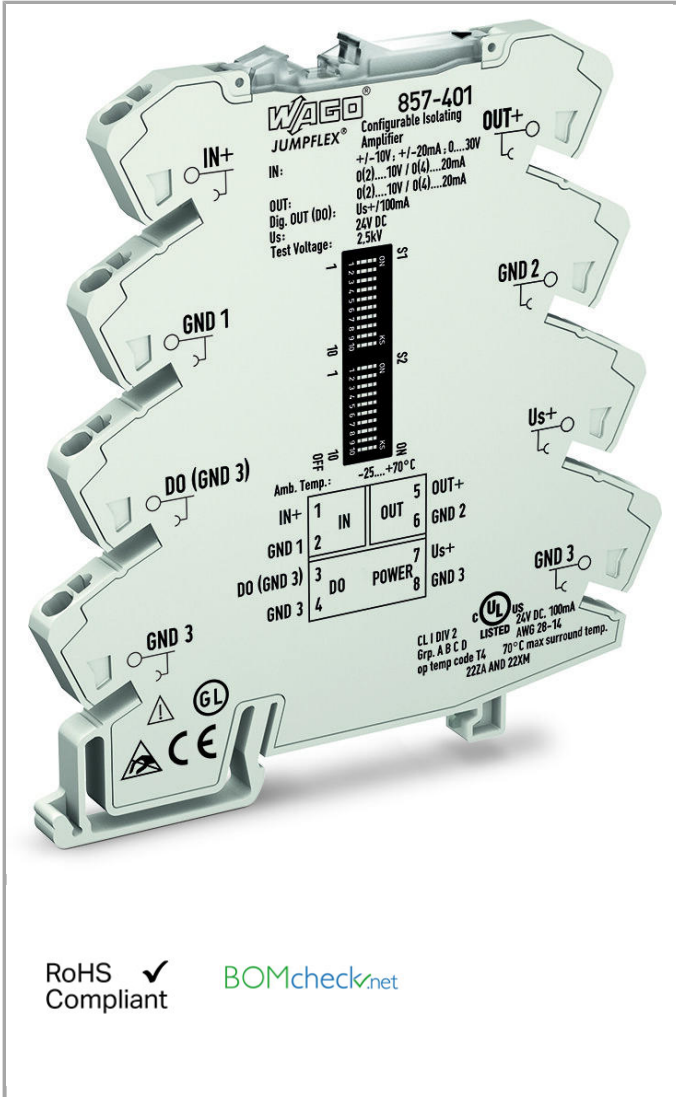

IN+	1	IN	OUT	5	OUT+
GND 1	2	U,I	U,I	6	GND 2
DO	3			7	Us+
GND 3	4	DO	POWER	8	GND 3

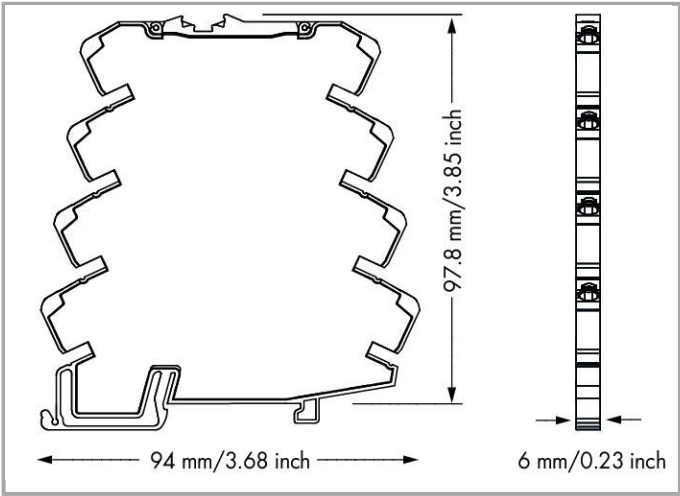

857-401
DIP Switch Adjustability

● = ON Default

1	Input Signal Start Value							Input Signal End Value																						
	DIP S1			DIP S1				DIP S2			DIP S2																			
V	2	3	4	5	6	7	8	9	10	1	2	3	4	5	6	7	8	9	10	1	2	3	4	5	6	7	8	9	10	
0																														
-10																														
-20																														
-45																														
-9																														
-18																														
-17																														
-8.5																														
-16																														
-7.5																														
-15																														
-7																														
-14																														
-6																														
-12																														
-5.5																														
-11																														
-5																														
-10																														
-9																														
-4.5																														
-8																														
-3.5																														
-7																														
-3																														
-2.5																														
-5																														
-1																														
-1.5																														
-2																														
-0.5																														
0																														
0.5																														
1																														
2																														
1.5																														
3																														
2																														
2.5																														
5																														
2.5																														
3																														
3.5																														
7																														
4																														
8																														
4.5																														
9																														
5																														
10																														
10																														

DIP Switch S2		Measuring Range Underflow		Measuring Range Overflow		Digital Output DO Signaling	
4	5	6	7	8	9	10	10
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●

Lower limit of output range -5%
Upper limit of output range +2.5%
GND → U_i (switching)
U_i → GND (switching)

*acc. to NAMUR NE 43

Digital Output DO Signaling
The digital output (DO) signals error messages and can be configured as follows: 24 V → 0 V / 0 V → 24 V.

In order to increase the switching current of the DO, the latter may be expanded by a relay. Thanks to the common housing shape for the 857 Series, for example, a 857-304 Relay can be snipped in next to it. This output can be quickly and easily expanded to a switching current of 6A by simply using an adjacent jumper 857-402.

Item description

Short description:

The configurable isolation amplifier converts, amplifies, filters, and electrically isolates standard analog signals.

Features:

- PC configuration interface
- Digital switching output
- Calibrated measurement range switching
- Analog, unipolar, and bipolar (standard) signals at input
- Switchable clipping capability limits the standard analog signal to the upper range values

Safe 3-way isolation with 2.5 kV test voltage per EN 61140

Note:

Additional setting options via interface configuration software or interface configuration app

Data Technical Data

Configuration

Configuration options

- DIP switches
- Interface configuration software
- Interface configuration app

Input

Input signal type	Voltage Current
Input signal voltage	$\pm 10\text{ V}$; 0 ... 30 V
Input signal, current	$\pm 20\text{ mA}$
Input resistance (input/voltage)	$\geq 100\text{ k}\Omega$
Max. input current	22 mA
Max. input voltage	31 V
Min. measuring span	1 V
Min. current measuring span	2 mA

Output

Output signal type	Current Voltage
Output signal voltage	0 ... 5 V; 1 ... 5 V; 0 ... 10 V; 2 ... 10 V
Output signal current	0 ... 10 mA; 2 ... 10 mA; 2 ... 20 mA; 4 ... 20 mA
Load impedance (output/voltage)	$\geq 2\text{ k}\Omega$
Load impedance (output/current)	$\leq 600\ \Omega$

Output – Digital

Max. switching voltage (DO)	Supply voltage applied
Max. continuous current (DO)	100 mA (no internal restriction)
Number of switching thresholds (DO)	1 (adjustable)

Signal processing

Step response typ.	8 ms
--------------------	------

Measurement error

Transmission error typ.	$\leq 0.1\%$ of upper range value
Temperature coefficient	$\leq 0.01\%$ /K

Power supply

Type of power supply	24 VDC
Nominal supply voltage U_S	DC 24 V
Supply voltage range	$\pm 30\%$
Current consumption at supply voltage	$\leq 40\text{ mA}$ (+ I_{DO})

Safety and protection:

Test voltage (input/output/supply)	AC 2.5 kV; 50 Hz; 1 min
------------------------------------	-------------------------



Protection class	IP20
------------------	------

Connection data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm ² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inch

Geometrical Data

Width	6 mm / 0.236 inch
Height from upper-edge of DIN-35 rail	97.8 mm / 3.85 inch
Depth	94 mm / 3.701 inch

Mechanical data

Type of mounting	DIN-35 rail
------------------	-------------

Material Data

Color	light gray
Fire load	0.772 MJ
Weight	37.04 g

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 70 °C
Surrounding air (storage) temperature	-40 ... 85 °C

Standards and specifications




Conformity marking	1
EMC immunity to interference	EN 61000-6-2; EN 61326-1; EN 50121-3-2
EMC emission of interference	EN 61000-6-3; EN 61326-1
Standards/specifications	EN 61373

Commercial data


Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454828509
Customs Tariff No.	85437090300

Approvals / Certificates

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	BV Bureau Veritas S.A.	-	40179_A0
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAA00001D1
	PRS Polski Rejestr Statków	-	TE/2186 /880590/18

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Netherlands B.V. (ORDINARY LOCATIONS)	UL 508	E175199 Sec.4

Compatible products

tools

Item no.: 210-720 Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm	www.wago.com/210-720
---	--
















Marking accessories

Item no.: 2009-110 Marking strips; on reel; not stretchable; plain; snap-on type	www.wago.com/2009-110
--	--

Item no.: 2009-115 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	www.wago.com/2009-115
--	--

Item no.: 2009-115/000-002 WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	www.wago.com/2009-115/000-002
--	--

Item no.: 2009-115/000-006 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type	www.wago.com/2009-115/000-006
---	--

	<p>Item no.: 2009-115/000-007 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type</p>	www.wago.com/2009-115/000-007
	<p>Item no.: 2009-115/000-012 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type</p>	www.wago.com/2009-115/000-012
	<p>Item no.: 2009-115/000-017 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type</p>	www.wago.com/2009-115/000-017
	<p>Item no.: 2009-115/000-023 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type</p>	www.wago.com/2009-115/000-023
	<p>Item no.: 2009-115/000-024 WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type</p>	www.wago.com/2009-115/000-024
	<p>Item no.: 793-501 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501
	<p>Item no.: 793-501/000-002 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501/000-002
	<p>Item no.: 793-501/000-005 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501/000-005
	<p>Item no.: 793-501/000-006 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501/000-006
	<p>Item no.: 793-501/000-007 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501/000-007
	<p>Item no.: 793-501/000-012 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501/000-012
	<p>Item no.: 793-501/000-017 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501/000-017
	<p>Item no.: 793-501/000-023 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501/000-023
	<p>Item no.: 793-501/000-024 WMB marking card; as card; not stretchable; plain; snap-on type</p>	www.wago.com/793-501/000-024
	<p>Item no.: 793-502 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type</p>	www.wago.com/793-502

**Item no.: 793-502/000-002**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-502/000-002**Item no.: 793-502/000-005**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-502/000-005**Item no.: 793-502/000-006**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-502/000-006**Item no.: 793-502/000-007**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-502/000-007**Item no.: 793-502/000-012**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-502/000-012**Item no.: 793-502/000-017**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-502/000-017**Item no.: 793-502/000-023**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-502/000-023**Item no.: 793-502/000-024**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-502/000-024**Item no.: 793-503**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503**Item no.: 793-503/000-002**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503/000-002**Item no.: 793-503/000-005**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503/000-005**Item no.: 793-503/000-006**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503/000-006**Item no.: 793-503/000-007**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503/000-007**Item no.: 793-503/000-012**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503/000-012**Item no.: 793-503/000-017**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503/000-017

**Item no.: 793-503/000-023**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503

/000-023

**Item no.: 793-503/000-024**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-503

/000-024

**Item no.: 793-504**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-504**Item no.: 793-504/000-002**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-504

/000-002

**Item no.: 793-504/000-005**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-504

/000-005

**Item no.: 793-504/000-006**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-504

/000-006

**Item no.: 793-504/000-012**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-504

/000-012

**Item no.: 793-504/000-017**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-504

/000-017

**Item no.: 793-504/000-023**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-504

/000-023

**Item no.: 793-505**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505**Item no.: 793-505/000-005**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505

/000-005

**Item no.: 793-505/000-006**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505

/000-006

**Item no.: 793-505/000-007**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505

/000-007

**Item no.: 793-505/000-012**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505

/000-012

**Item no.: 793-506**

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-506



Item no.: 793-506/000-005

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type www.wago.com/793-506/000-005



Item no.: 793-506/000-006

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type www.wago.com/793-506/000-006



Item no.: 793-506/000-012

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type www.wago.com/793-506/000-012



Item no.: 793-506/000-017

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type www.wago.com/793-506/000-017



Item no.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501



Item no.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-002



Item no.: 793-5501/000-005

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-005



Item no.: 793-5501/000-006

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-006



Item no.: 793-5501/000-007

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-007



Item no.: 793-5501/000-012

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-012



Item no.: 793-5501/000-014

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-014



Item no.: 793-5501/000-017

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-017



Item no.: 793-5501/000-023

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-023



Item no.: 793-5501/000-024

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type www.wago.com/793-5501/000-024



Item no.: 793-566

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type www.wago.com/793-566

**Item no.: 793-566/000-002**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-002**Item no.: 793-566/000-005**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-005**Item no.: 793-566/000-006**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-006**Item no.: 793-566/000-007**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-007**Item no.: 793-566/000-012**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-012**Item no.: 793-566/000-017**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-017**Item no.: 793-566/000-023**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-023**Item no.: 793-566/000-024**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-024

Jumper

Item no.: 281-482

Comb-style jumper bar; insulated; 2-way; IN = IN terminal block

www.wago.com/281-482**Item no.: 859-402**

Push-in type jumper bar; 2-way; Nominal current 18 A; insulated

www.wago.com/859-402**Item no.: 859-402/000-005**

Push-in type jumper bar; 2-way; Nominal current 18 A; insulated

www.wago.com/859-402/000-005**Item no.: 859-402/000-006**

Push-in type jumper bar; 2-way; Nominal current 18 A; insulated

www.wago.com/859-402/000-006**Item no.: 859-402/000-029**

Push-in type jumper bar; 2-way; Nominal current 18 A; insulated

www.wago.com/859-402/000-029**Item no.: 859-403**

Push-in type jumper bar; 3-way; Nominal current 18 A; insulated

www.wago.com/859-403**Item no.: 859-403/000-005**

Push-in type jumper bar; 3-way; Nominal current 18 A; insulated

www.wago.com/859-403/000-005



Item no.: 859-403/000-006
Push-in type jumper bar; 3-way; Nominal current 18 A; insulated

www.wago.com/859-403/000-006



Item no.: 859-403/000-029
Push-in type jumper bar; 3-way; Nominal current 18 A; insulated

www.wago.com/859-403/000-029



Item no.: 859-404
Push-in type jumper bar; 4-way; Nominal current 18 A; insulated

www.wago.com/859-404



Item no.: 859-404/000-005
Push-in type jumper bar; 4-way; Nominal current 18 A; insulated

www.wago.com/859-404/000-005



Item no.: 859-404/000-006
Push-in type jumper bar; 4-way; Nominal current 18 A; insulated

www.wago.com/859-404/000-006



Item no.: 859-404/000-029
Push-in type jumper bar; 4-way; Nominal current 18 A; insulated

www.wago.com/859-404/000-029



Item no.: 859-405
Push-in type jumper bar; 5-way; Nominal current 18 A; insulated

www.wago.com/859-405



Item no.: 859-405/000-005
Push-in type jumper bar; 5-way; Nominal current 18 A; insulated

www.wago.com/859-405/000-005



Item no.: 859-405/000-006
Push-in type jumper bar; 5-way; Nominal current 18 A; insulated

www.wago.com/859-405/000-006



Item no.: 859-405/000-029
Push-in type jumper bar; 5-way; Nominal current 18 A; insulated

www.wago.com/859-405/000-029



Item no.: 859-406
Push-in type jumper bar; 6-way; Nominal current 18 A; insulated

www.wago.com/859-406



Item no.: 859-406/000-005
Push-in type jumper bar; 6-way; Nominal current 18 A; insulated

www.wago.com/859-406/000-005



Item no.: 859-406/000-006
Push-in type jumper bar; 6-way; Nominal current 18 A; insulated

www.wago.com/859-406/000-006



Item no.: 859-406/000-029
Push-in type jumper bar; 6-way; Nominal current 18 A; insulated

www.wago.com/859-406/000-029



Item no.: 859-407
Push-in type jumper bar; 7-way; Nominal current 18 A; insulated

www.wago.com/859-407



Item no.: 859-407/000-005
Push-in type jumper bar; 7-way; Nominal current 18 A; insulated

www.wago.com/859-407/000-005



Item no.: 859-407/000-006
Push-in type jumper bar; 7-way; Nominal current 18 A; insulated

www.wago.com/859-407/000-006



Item no.: 859-407/000-029
Push-in type jumper bar; 7-way; Nominal current 18 A; insulated

www.wago.com/859-407/000-029



Item no.: 859-408
Push-in type jumper bar; 8-way; Nominal current 18 A; insulated

www.wago.com/859-408



Item no.: 859-408/000-005
Push-in type jumper bar; 8-way; Nominal current 18 A; insulated

www.wago.com/859-408/000-005



Item no.: 859-408/000-006
Push-in type jumper bar; 8-way; Nominal current 18 A; insulated

www.wago.com/859-408/000-006



Item no.: 859-408/000-029
Push-in type jumper bar; 8-way; Nominal current 18 A; insulated

www.wago.com/859-408/000-029



Item no.: 859-409
Push-in type jumper bar; 9-way; Nominal current 18 A; insulated

www.wago.com/859-409



Item no.: 859-409/000-005
Push-in type jumper bar; 9-way; Nominal current 18 A; insulated

www.wago.com/859-409/000-005



Item no.: 859-409/000-006
Push-in type jumper bar; 9-way; Nominal current 18 A; insulated

www.wago.com/859-409/000-006



Item no.: 859-409/000-029
Push-in type jumper bar; 9-way; Nominal current 18 A; insulated

www.wago.com/859-409/000-029


Item no.: 859-410
Push-in type jumper bar; 10-way; Nominal current 18 A; insulated

www.wago.com/859-410



Item no.: 859-410/000-005
Push-in type jumper bar; 10-way; Nominal current 18 A; insulated

www.wago.com/859-410/000-005



Item no.: 859-410/000-006
Push-in type jumper bar; 10-way; Nominal current 18 A; insulated

www.wago.com/859-410/000-006



Item no.: 859-410/000-029
Push-in type jumper bar; 10-way; Nominal current 18 A; insulated

www.wago.com/859-410/000-029

transfer module

Item no.: 857-980
JUMPFLEX® adapter; with 16-pole flat cable connector per DIN 41651; analog

www.wago.com/857-980

General accessories



Item no.: 750-921
Bluetooth® Adapter

www.wago.com/750-921

Item no.: 750-923
Configuration cable; USB connector

www.wago.com/750-923

Item no.: 750-923/000-001
Configuration cable; USB connector; Length: 5 m

www.wago.com/750-923/000-001

Item no.: 857-304
Relay module; Nominal input voltage: 24 VDC; 1 changeover contact; Limiting continuous current: 6 A; Yellow status indicator; Module width: 6 mm

www.wago.com/857-304

Item no.: 857-979
Supply and through module

www.wago.com/857-979

assembling

Item no.: 249-116
Screwless end stop; 6 mm wide

www.wago.com/249-116

Item no.: 249-117
Screwless end stop; 10 mm wide

www.wago.com/249-117

Item no.: 249-197
Screwless end stop; 14 mm wide

www.wago.com/249-197

power supply

Item no.: 787-2852
Switched-mode power supply; for JUMPFLEX® Signal Conditioners; 1-phase; 24 VDC output voltage; 1 A output current

www.wago.com/787-2852

Downloads

Documentation

Instruction Leaflet

Measurement Transducer and Isolation Amplifier
Configurable, with digital output

29-ago-2017

pdf
2.0 MB

Download

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0
10-oct-2018

pdf
265.8 kB

Download

Engineering-Software

Software for Interface-Products

Interface Configuration Software FULL
The full setup, in addition to the WAGO Interface Configuration Software, includes the installation for the Microsoft .NET Framework.

1.6.2.11
14-ene-2019

exe
97.5 MB

Download

Interface Configuration Software SMALL

1.6.2.11

exe

Download



The full setup only includes the WAGO Interface Configuration Software.

14-ene-2019

47.1 MB

CAD/CAE - Smart Data

CAD data

3D Download 857-401

URL

Download

Subject to changes.