




Data sheet | Item number: 857-810

Temperature signal conditioner for thermocouples; Current and voltage output signal; Configuration via DIP switch; Supply voltage: 24 VDC; 6 mm module width

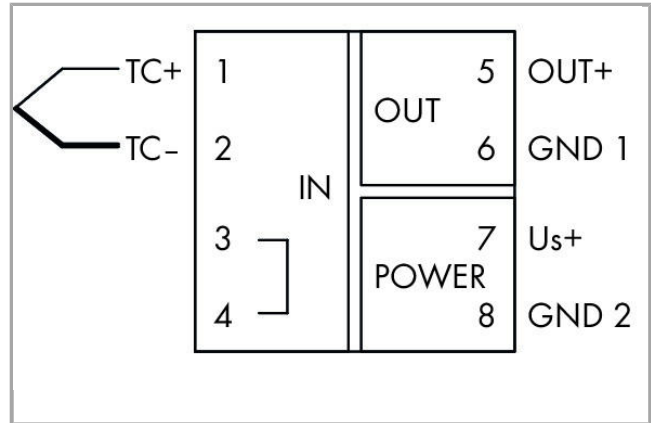

www.wago.com/857-810

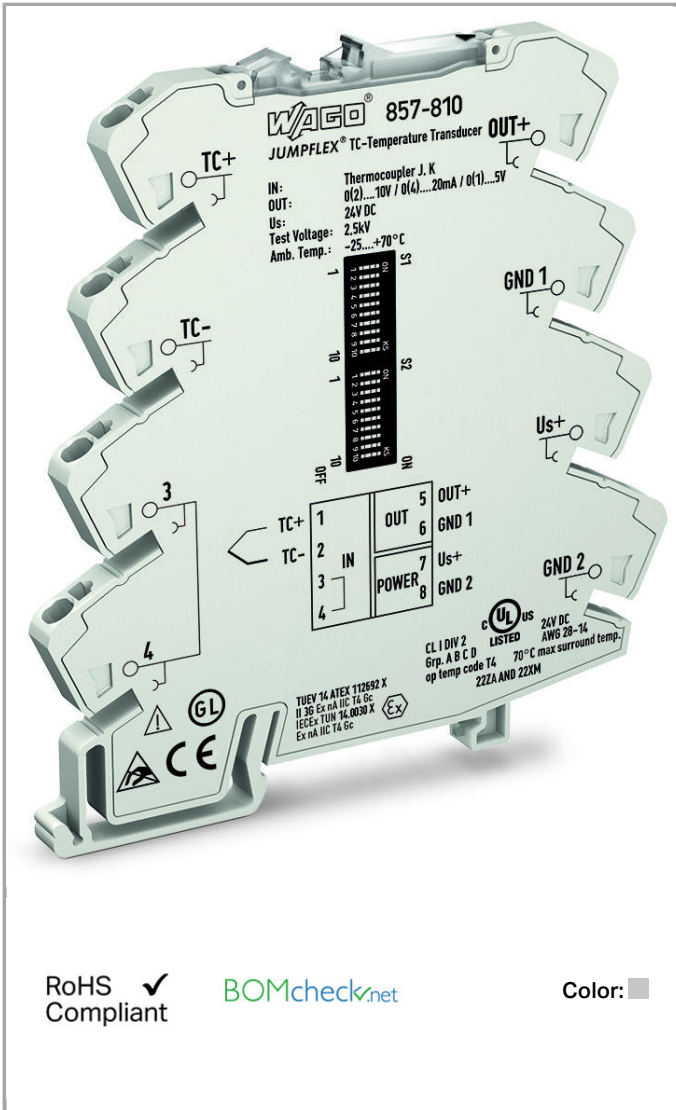

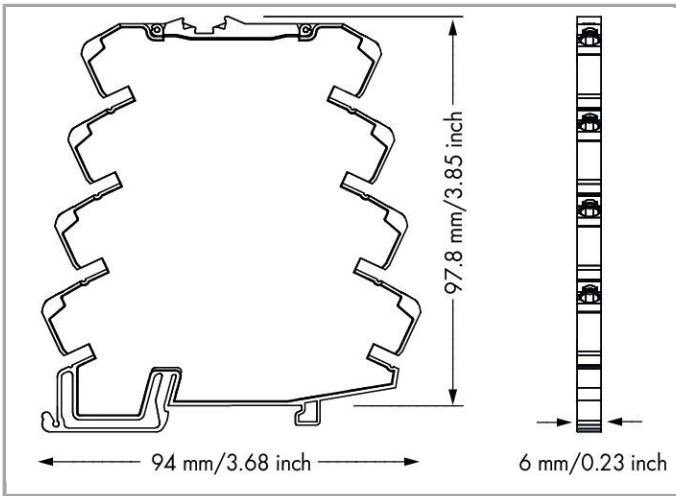

857-810
DIP Switch Adjustability

• = ON Default

DIP Switch S1

Cold Junction Compensation	Sensor type	Output signal	Measurement Range Underflow	Measurement Range Overflow	Wire Break
1 on	2 J	3 4...20 mA	7 Lower limit of output range -5 %*	8 Upper limit of output range +2.5 %*	Upper limit of output range +5 %*
• off	• K	• 4...20 mA	• Lower limit of output range	• Upper limit of output range +2.5 %	• Upper limit of output range +5 %
		• 2...10 mA			
		• 0...10 V			
		• 2...10 V			
		• 0...5 V	• Lower limit of output range	• Upper limit of output range	• Lower limit of output range
		• 1...5 V			

DIP 9 and 10 n.c.

DIP Switch S2

Start Temperature										End Temperature																																	
1	2	3	4	°C	°F	5	6	7	8	9	10	°C	°F	5	6	7	8	9	10	°C	°F																						
•	•	•	•	0	32	•	•	•	•	•	•	1000	1832	•	•	•	•	•	•	•	•	•	•	625	1157	•	•	•	•	•	•	1025	1877										
•	•	•	•	-200	-328	•	•	•	•	•	•	0	32	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	650	1202	•	•	•	•	1050	1922
•	•	•	•	-175	-283	•	•	•	•	•	•	10	50	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	675	1247	•	•	•	•	1075	1967
•	•	•	•	-150	-233	•	•	•	•	•	•	20	68	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	700	1292	•	•	•	•	1100	2012
•	•	•	•	-125	-193	•	•	•	•	•	•	30	86	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	725	1337	•	•	•	•	1125	2057
•	•	•	•	-100	-148	•	•	•	•	•	•	40	104	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	750	1382	•	•	•	•	1150	2102
•	•	•	•	-90	-130	•	•	•	•	•	•	50	122	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	775	1427	•	•	•	•	1175	2147
•	•	•	•	-80	-112	•	•	•	•	•	•	60	140	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	800	1472	•	•	•	•	1200	2192
•	•	•	•	-70	-94	•	•	•	•	•	•	70	158	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	825	1517	•	•	•	•	1225	2237
•	•	•	•	-60	-76	•	•	•	•	•	•	80	176	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	850	1562	•	•	•	•	1250	2282
•	•	•	•	-50	-58	•	•	•	•	•	•	90	194	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	875	1607	•	•	•	•	1275	2327
•	•	•	•	-40	-40	•	•	•	•	•	•	100	212	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	900	1652	•	•	•	•	1300	2372
•	•	•	•	-30	-22	•	•	•	•	•	•	125	257	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	925	1697	•	•	•	•	1325	2417
•	•	•	•	-20	-4	•	•	•	•	•	•	150	302	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	950	1742	•	•	•	•	1350	2462
•	•	•	•	-10	14	•	•	•	•	•	•	175	347	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	975	1787	•	•	•	•	1375	2507
•	•	•	•	0	32	•	•	•	•	•	•	200	392	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	1000	1832	•	•	•	•	1400	2552

The minimum distance from the start temperature to the end temperature may not fall short of 100K degrees on the Celsius (C) scale or 212K degrees on the Fahrenheit (F) scale.

Item description

Short description:

This temperature signal conditioner records signals from type J and K thermocouples and converts the temperature signal into a standard analog signal on the output side.

Features:

- For type J and K thermocouples
- Cold junction compensation (on/off)
- Switching between measurement ranges is calibrated
- Detect sensor's wire break
- Detect measurement range underflow/measurement range overflow
- Integrate a switchable clipping function to limit the standard analog signal to the upper range values
- Safe 3-way isolation with 2.5 kV test voltage per EN 61140

Data

Technical Data

Configuration

Configuration options

DIP switches

Input

Input signal type

TC sensors

Input – TC sensors

Sensor types (TC)

Type J
Type K

Measurement range temperature (TC)

-150 ... 1200 °C (Type J); -150 ... 1350 °C (Type K)



Min. measuring span (TC)	100 K
Cold junction compensation	On/Off (Default: On)
Cold junction error	3 K (typ. 2 K)

Output

Output signal type	Current Voltage
Output signal voltage	0 ... 5 V; 1 ... 5 V; 0 ... 10 V; 2 ... 10 V
Output signal current	0 ... 10 mA; 2 ... 10 mA; 0 ... 20 mA; 4 ... 20 mA
Load impedance (output/voltage)	$\geq 2 \text{ k}\Omega$
Load impedance (output/current)	$\leq 600 \Omega$

Signal processing

Step response typ.	60 ms (cold junction compensation off); 120 ms (cold junction compensation on)
--------------------	--

Measurement error

Transmission error typ.	$\leq 0.1 \%$ at max. measuring span (Type J, K)
Transmission error of set measurement range	$\leq (150 \text{ K}/\text{set measurement range [K]}) \%$
Temperature coefficient	$\leq 0.04 \%/K$

Power supply

Type of power supply	24 VDC
Nominal supply voltage U_S	DC 24 V
Supply voltage range	$\pm 30 \%$
Current consumption at supply voltage	$\leq 40 \text{ mA}$

Safety and protection:

Test voltage (input/output/supply)	AC 2.5 kV; 50 Hz; 1 min
Protection class	IP20

Connection data

Connection technology	Push-in CAGE CLAMP [®]
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm ² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inch

Geometrical Data

Width	6 mm / 0.236 inch
-------	-------------------

Height from upper-edge of DIN-35 rail	97.8 mm / 3.85 inch
Depth	94 mm / 3.701 inch

Mechanical data

Type of mounting	DIN-35 rail
------------------	-------------

Material Data

Color	light gray
Fire load	0.598 MJ
Weight	35.5 g

Environmental Requirements

Surrounding air (operating) temperature	-25 ... 70 °C
Surrounding air (storage) temperature	-40 ... 85 °C

Standards and specifications



Conformity marking	1
EMC immunity to interference	EN 61000-6-2
EMC emission of interference	EN 61000-6-4

Commercial data

Product Group	6 (Interface Electronics)
Country of origin	DE
GTIN	4045454470135
Customs Tariff No.	85437090300





Approvals / Certificates

Ex-Approvals


Logo	Approval	Additional Approval Text	Certificate name
	IECEX TUEV Nord Cert GmbH	IEC 60079-0	IECEX_TUN_14.0030_X
	IECEX TUEV Nord Cert GmbH	EN 60079-0	TÜV_14_ATEX_112692_X

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
------	----------	--------------------------	------------------




	BV Bureau Veritas S.A.	-	40179_A0
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAA00001D1
	NK Nippon Kaiji Kyokai	-	TA17255M
	PRS Polski Rejestr Statków	-	TE/2186 /880590/18
















UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Netherlands B.V. (ORDINARY LOCATIONS)	UL 508	E175199 Sec.4

Compatible products

Jumper

	Item no.: 281-482 Comb-style jumper bar; insulated; 2-way; IN = IN terminal block	www.wago.com/281-482
	Item no.: 859-402 Push-in type jumper bar; 2-way; Nominal current 18 A; insulated	www.wago.com/859-402
	Item no.: 859-402/000-005 Push-in type jumper bar; 2-way; Nominal current 18 A; insulated	www.wago.com/859-402/000-005
	Item no.: 859-402/000-006 Push-in type jumper bar; 2-way; Nominal current 18 A; insulated	www.wago.com/859-402/000-006
	Item no.: 859-402/000-029 Push-in type jumper bar; 2-way; Nominal current 18 A; insulated	www.wago.com/859-402/000-029

	Item no.: 859-403 Push-in type jumper bar; 3-way; Nominal current 18 A; insulated	www.wago.com/859-403
	Item no.: 859-403/000-005 Push-in type jumper bar; 3-way; Nominal current 18 A; insulated	www.wago.com/859-403/000-005
	Item no.: 859-403/000-006 Push-in type jumper bar; 3-way; Nominal current 18 A; insulated	www.wago.com/859-403/000-006
	Item no.: 859-403/000-029 Push-in type jumper bar; 3-way; Nominal current 18 A; insulated	www.wago.com/859-403/000-029
	Item no.: 859-404 Push-in type jumper bar; 4-way; Nominal current 18 A; insulated	www.wago.com/859-404
	Item no.: 859-404/000-005 Push-in type jumper bar; 4-way; Nominal current 18 A; insulated	www.wago.com/859-404/000-005
	Item no.: 859-404/000-006 Push-in type jumper bar; 4-way; Nominal current 18 A; insulated	www.wago.com/859-404/000-006
	Item no.: 859-404/000-029 Push-in type jumper bar; 4-way; Nominal current 18 A; insulated	www.wago.com/859-404/000-029
	Item no.: 859-405 Push-in type jumper bar; 5-way; Nominal current 18 A; insulated	www.wago.com/859-405
	Item no.: 859-405/000-005 Push-in type jumper bar; 5-way; Nominal current 18 A; insulated	www.wago.com/859-405/000-005
	Item no.: 859-405/000-006 Push-in type jumper bar; 5-way; Nominal current 18 A; insulated	www.wago.com/859-405/000-006
	Item no.: 859-405/000-029 Push-in type jumper bar; 5-way; Nominal current 18 A; insulated	www.wago.com/859-405/000-029
	Item no.: 859-406 Push-in type jumper bar; 6-way; Nominal current 18 A; insulated	www.wago.com/859-406
	Item no.: 859-406/000-005 Push-in type jumper bar; 6-way; Nominal current 18 A; insulated	www.wago.com/859-406/000-005
	Item no.: 859-406/000-006 Push-in type jumper bar; 6-way; Nominal current 18 A; insulated	www.wago.com/859-406/000-006



Item no.: 859-406/000-029
Push-in type jumper bar; 6-way; Nominal current 18 A; insulated

www.wago.com/859-406/000-029



Item no.: 859-407
Push-in type jumper bar; 7-way; Nominal current 18 A; insulated

www.wago.com/859-407



Item no.: 859-407/000-005
Push-in type jumper bar; 7-way; Nominal current 18 A; insulated

www.wago.com/859-407/000-005



Item no.: 859-407/000-006
Push-in type jumper bar; 7-way; Nominal current 18 A; insulated

www.wago.com/859-407/000-006



Item no.: 859-407/000-029
Push-in type jumper bar; 7-way; Nominal current 18 A; insulated

www.wago.com/859-407/000-029



Item no.: 859-408
Push-in type jumper bar; 8-way; Nominal current 18 A; insulated

www.wago.com/859-408



Item no.: 859-408/000-005
Push-in type jumper bar; 8-way; Nominal current 18 A; insulated

www.wago.com/859-408/000-005



Item no.: 859-408/000-006
Push-in type jumper bar; 8-way; Nominal current 18 A; insulated

www.wago.com/859-408/000-006



Item no.: 859-408/000-029
Push-in type jumper bar; 8-way; Nominal current 18 A; insulated

www.wago.com/859-408/000-029



Item no.: 859-409
Push-in type jumper bar; 9-way; Nominal current 18 A; insulated

www.wago.com/859-409



Item no.: 859-409/000-005
Push-in type jumper bar; 9-way; Nominal current 18 A; insulated

www.wago.com/859-409/000-005



Item no.: 859-409/000-006
Push-in type jumper bar; 9-way; Nominal current 18 A; insulated

www.wago.com/859-409/000-006



Item no.: 859-409/000-029
Push-in type jumper bar; 9-way; Nominal current 18 A; insulated

www.wago.com/859-409/000-029




Item no.: 859-410
Push-in type jumper bar; 10-way; Nominal current 18 A; insulated

www.wago.com/859-410



Item no.: 859-410/000-005
Push-in type jumper bar; 10-way; Nominal current 18 A; insulated

www.wago.com/859-410/000-005



Item no.: 859-410/000-006
Push-in type jumper bar; 10-way; Nominal current 18 A; insulated

www.wago.com/859-410/000-006



Item no.: 859-410/000-029
Push-in type jumper bar; 10-way; Nominal current 18 A; insulated

www.wago.com/859-410/000-029

General accessories

Item no.: 857-979
Supply and through module

www.wago.com/857-979

power supply

Item no.: 787-2852
Switched-mode power supply; for JUMPFLEX® Signal Conditioners; 1-phase; 24 VDC output voltage; 1 A output current

www.wago.com/787-2852

Marking accessories

Item no.: 2009-110
Marking strips; on reel; not stretchable; plain; snap-on type

www.wago.com/2009-110

Item no.: 2009-115
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/2009-115



Item no.: 2009-115/000-002
WMB-Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/2009-115/000-002

Item no.: 2009-115/000-006
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/2009-115/000-006

Item no.: 2009-115/000-007
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/2009-115/000-007

Item no.: 2009-115/000-012
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/2009-115/000-012



Item no.: 2009-115/000-017
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/2009-115/000-017



Item no.: 2009-115/000-023
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/2009-115/000-023



Item no.: 2009-115/000-024
WMB-Inline; for smartPRINTER; on reel; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/2009-115/000-024



Item no.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type

www.wago.com/793-501


















Item no.: 793-501/000-002
WMB marking card; as card; not stretchable; plain; snap-on type
















www.wago.com/793-501/000-002



Item no.: 793-501/000-005
WMB marking card; as card; not stretchable; plain; snap-on type

www.wago.com/793-501/000-005

	Item no.: 793-501/000-006 WMB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/793-501/000-006
	Item no.: 793-501/000-007 WMB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/793-501/000-007
	Item no.: 793-501/000-012 WMB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/793-501/000-012
	Item no.: 793-501/000-017 WMB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/793-501/000-017
	Item no.: 793-501/000-023 WMB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/793-501/000-023
	Item no.: 793-501/000-024 WMB marking card; as card; not stretchable; plain; snap-on type	www.wago.com/793-501/000-024
	Item no.: 793-502 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502
	Item no.: 793-502/000-002 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502/000-002
	Item no.: 793-502/000-005 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502/000-005
	Item no.: 793-502/000-006 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502/000-006
	Item no.: 793-502/000-007 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502/000-007
	Item no.: 793-502/000-012 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502/000-012
	Item no.: 793-502/000-017 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502/000-017
	Item no.: 793-502/000-023 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502/000-023
	Item no.: 793-502/000-024 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-502/000-024

	Item no.: 793-503 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503
	Item no.: 793-503/000-002 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503/000-002
	Item no.: 793-503/000-005 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503/000-005
	Item no.: 793-503/000-006 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503/000-006
	Item no.: 793-503/000-007 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503/000-007
	Item no.: 793-503/000-012 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503/000-012
	Item no.: 793-503/000-017 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503/000-017
	Item no.: 793-503/000-023 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503/000-023
	Item no.: 793-503/000-024 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-503/000-024
	Item no.: 793-504 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-504
	Item no.: 793-504/000-002 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-504/000-002
	Item no.: 793-504/000-005 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-504/000-005
	Item no.: 793-504/000-006 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-504/000-006
	Item no.: 793-504/000-012 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-504/000-012
	Item no.: 793-504/000-017 WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type	www.wago.com/793-504/000-017



Item no.: 793-504/000-023

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-504/000-023



Item no.: 793-505

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505



Item no.: 793-505/000-005

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505/000-005



Item no.: 793-505/000-006

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505/000-006



Item no.: 793-505/000-007

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505/000-007



Item no.: 793-505/000-012

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-505/000-012



Item no.: 793-506

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-506



Item no.: 793-506/000-005

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-506/000-005



Item no.: 793-506/000-006

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-506/000-006



Item no.: 793-506/000-012

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-506/000-012



Item no.: 793-506/000-017

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-506/000-017



Item no.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501



Item no.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-002



Item no.: 793-5501/000-005

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-005



Item no.: 793-5501/000-006

WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-006



Item no.: 793-5501/000-007
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-007



Item no.: 793-5501/000-012
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-012



Item no.: 793-5501/000-014
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-014



Item no.: 793-5501/000-017
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-017



Item no.: 793-5501/000-023
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-023



Item no.: 793-5501/000-024
WMB marking card; as card; stretchable 5 - 5.2 mm; plain; snap-on type

www.wago.com/793-5501/000-024



Item no.: 793-566
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566



Item no.: 793-566/000-002
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-002



Item no.: 793-566/000-005
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-005



Item no.: 793-566/000-006
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-006



Item no.: 793-566/000-007
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-007



Item no.: 793-566/000-012
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-012



Item no.: 793-566/000-017
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-017



Item no.: 793-566/000-023
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-023



Item no.: 793-566/000-024
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type

www.wago.com/793-566/000-024

transfer module

Item no.: 857-980 JUMPFLEX® adapter; with 16-pole flat cable connector per DIN 41651; analog	www.wago.com/857-980
--	--

assembling

Item no.: 249-116 Screwless end stop; 6 mm wide	www.wago.com/249-116
---	--

Item no.: 249-117 Screwless end stop; 10 mm wide	www.wago.com/249-117
--	--



Item no.: 249-197 Screwless end stop; 14 mm wide	www.wago.com/249-197
--	--

tools

Item no.: 210-720 Operating tool with partially insulated shaft; Type 2, blade (3.5 x 0.5) mm	www.wago.com/210-720
---	--

Downloads

Documentation

Instruction Leaflet

Measurement Transducer and Isolation Amplifier Temperature transducer Thermocouples Typ J, K DIP switch	08-oct-2010	pdf 2.4 MB	Download
--	-------------	---------------	----------

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0 10-oct-2018	pdf 265.8 kB	Download
--	------------------------	-----------------	----------

CAD/CAE - Smart Data

CAD data

3D Download 857-810		URL	Download
Step file 857-08xx Series	1.0 30-jun-2011	STP 348.4 kB	Download

Subject to changes.