

Contents

	Page
Han® 3 A RJ45	04.04
Han® 3 A 2 x LC duplex	04.10
Han® 3 A RJ45 Hybrid (3 x Power)	04.11
Han® 3 A LC duplex Hybrid (3 x Power)	04.13
Han® 3 A RJ45 Hybrid (4 x Power)	04.15
Han-Brid®	04.20
Han® Q 5/0 with pcb adapter	04.30
Han® Q 7/0 with pcb adapter	04.32
Han® Q 4/2 with pcb adapter	04.36
Han® Q 8/0 with pcb adapter	04.38
Han DD® with pcb adapter	04.44
Han E® with pcb adapter	04.46
Han-Modular® with pcb adapter	04.48

Han® connectors with degree of protection IP65 / IP67 are established as the worldwide standard for industrial connectors. This standard connector can also be used directly as appliance connector.

The rugged housings are equipped with secure interlock mechanisms that protect the contact inserts from external negative influences such as dust, dampness and mechanical stress. On the appliance side, the connector contacts are routed in the bulkhead mount module, soldered directly onto the PCB and are aligned precisely to the bulkhead frame. This results in appliance connections that are resistant to any environmental stress.

The Han® appliance connectors offer comprehensive solutions based on connector inserts for data, signal and power lines up to 32 A per contact. The Han® 3 A housing can be equipped for

communication applications with copper-bound RJ45 modules, 4-pole (Cat. 5) and 8-pole (Cat. 6) and optical LC modules. The power contact inserts are available for the Han® 3 A, Han® Compact and Han® B housing variants. The cables can be wired to the contact inserts by way of crimp, screw or cage clamp terminals, or using the patented Quick-Lock® quick connection technology for on-site assembly.

HARTING highlights its Han® 3 A appliance connector series with versatile hybrid contact inserts for wiring data and power lines using a single connector and cable. This functionality results in a reduction of insertion points and cabling by more than 50%.

Han® connectors with high degree of protection can be used for wiring appliances, terminal boxes and control cabinets.




Han® APPLIANCE CONNECTORS:

The PCB-Adapter of HARTING can be used to convert Han® industrial connectors into fully-fledged PCB connectors. The modular PCB adapters enable the implementation of various Han® contact inserts.

The PCB Adapter concept:

- The PCB adapter is processed as component in a standard soldering process and is a fixed part of the PCB.
- The contact insert of the Han® industrial connector is simply plugged in after the soldering process has been completed.
- The bulkhead mount housing with the bracket interlock is mounted to the appliance housing.

This modularity guarantees the availability of a wide range of contact inserts and connector housings for the assembly of a multitude of rugged IP65 / IP67 appliance connectors for data, signal and power lines.

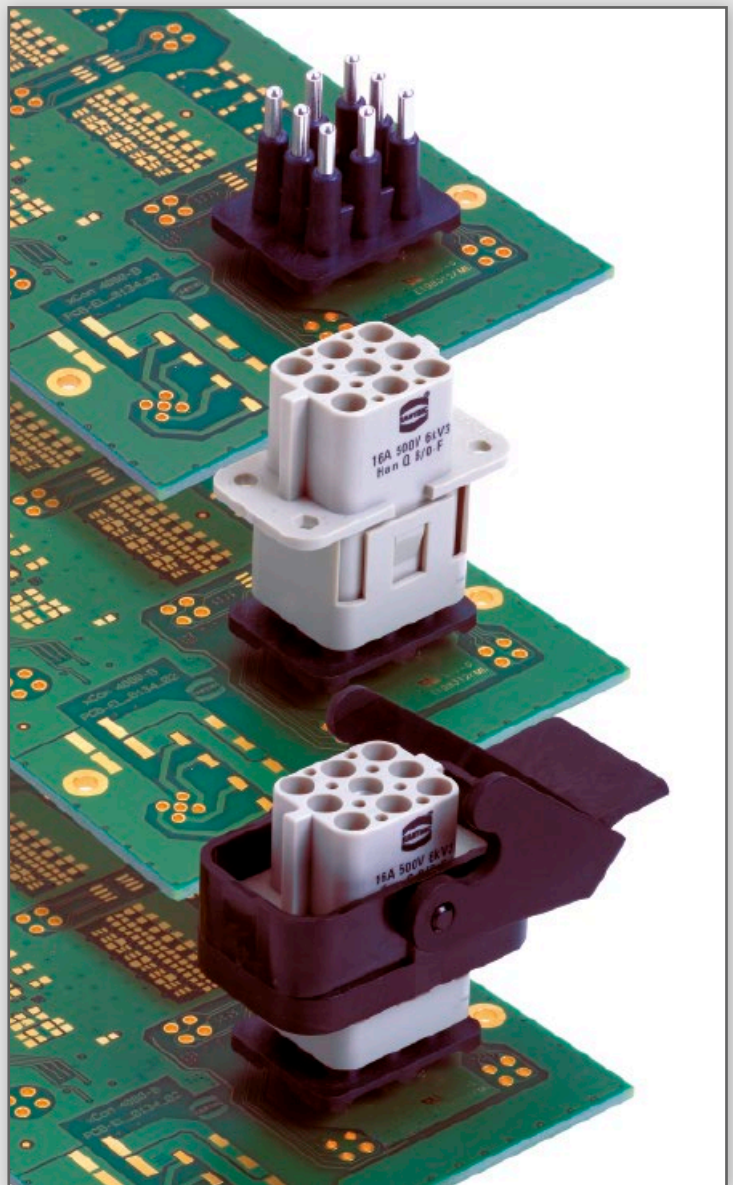

SCALABLE HYBRID APPLIANCE CONNECTION USING Han® CONNECTORS:

The hybrid appliance connector series enable the cost-effective combination of Fieldbus/Ethernet communication and power supply lines in a single cable and connector.

The contact insert combination for communication and for the power supply to the appliance is soldered directly to the PCB. The bulkhead mount housing can be adapted directly to the housing shape, or be mounted as separate unit to the appliance housing. HARTING offers cable solutions for smaller batches which can be used to connect the contact insert to the PCB.

Key user benefits: A tailored appliance connection is always available for small- and large-scale appliance series.





Han® 3 A RJ45 device side

Advantages

- Simple mounting
- RJ45 plug-compatible
- Different versions cover all applications
- Coding (4 variants) possible

Technical characteristics

Number of ports	2 / 1x Han® 3 A RJ45 (IP65 / IP67)
Copper / termination	1x RJ45 (IP20)
Transmission performance	Category 5 / Class D up to 100 MHz acc. to ISO/IEC 11801:2002, EN 50173-1
Transmission rate	10/100/1000 Mbit/s
Shielding	fully shielded, 360° shielding contact
Mounting	screw-on type on steel plate walls
Degree of protection	IP65 / IP67
Mating cycles	min. 500
Temperature range	-40 °C ... +70 °C
Housing material	
Plastic version	Polycarbonate, black, UL 94 V0
Metal version	Zinc die-cast, powder coating, grey

Identification	Part number	Drawing	Dimensions in mm
Housing bulkhead mounting Plastic version, black Metal version Standard Metal version M with fixed cover and with seal Metal version Standard Metal version M	09 20 003 0327 09 20 003 0301 09 37 003 0301 09 20 003 0306 09 37 003 0306	<p>Dimensions valid for Metal version Standard</p>	
Adapter for fixing of RJ45 jack with fixing clip without fixing clip	09 45 515 0020 09 45 515 0022		
RJ45 jacks Cat. 5 Solder variant SMD, 90° angled Solder variant overmolded, 90° angled	09 45 551 1100 ¹⁾ 09 45 551 1110 ²⁾ 09 45 551 1102 ¹⁾		

¹⁾ Packaging: Blister à 120 pieces

²⁾ Packaging: Tape & Reel à 130 pieces



Han® 3 A RJ45-panel feed-throughs and couplings Cat. 5

Identification	Part number	Drawing	Dimensions in mm	
Panel feed-through set, 8-poles				
Plastic version, black	straight			
	angled			09 45 225 1100
Metal version Standard, grey	straight			09 45 225 1108
	straight, inner vertical jack			09 45 215 1100
	angled			09 45 215 1101
Metal version Standard, grey with self-closing protective cap	straight			09 45 215 1103
	angled			09 45 215 1108
Metal version M, black	straight			09 45 215 1102
	angled			09 45 215 1109
Coding pin set for 4 different codings	09 45 820 0000			Dimensions valid for plastic version, straight
Double coupling, 8-poles incl. installation frame metal				
Plastic version, black	09 45 225 1107			
Metal version Standard, grey	09 45 215 1107			
Metal version M, black	09 45 215 1110			
Coding pin set for 4 different codings	09 45 820 0000			Dimensions valid for plastic version
Protection cover for panel feed-through IP65 / IP67 with seal				
Plastic version, black	09 20 003 5449			
Metal version Standard, grey	09 20 003 5425			
Metal version M, black	09 37 003 5405			Dimensions valid for plastic version



Han® 3 A RJ45 10G Cat. 6 – panel feed-throughs

Advantages

- Compact and robust design
- 360° shielding
- Easy mounting
- Transmission category 6, performance class E_A, suitable for 1/10 Gigabit Ethernet
- RJ45 mating compatible
- Coding (4 variants) possible

Technical characteristics

Number of ports	2 / 1x Han® 3 A RJ45 (IP65 / IP67) 1x RJ45 (IP20)
Transmission performance	Category 6 / class E _A acc. to ISO/IEC 11801:2002, EN 50 173-1
Transmission rate	10/100 Mbit/s and 1/10 Gbit/s
Shielding	Fully shielded, 360° shielding contact
Mounting	Screwable to cover plates
Degree of protection	IP65 / IP67
Mating cycles	min. 500
Temperature range	-40 °C ... + 70 °C
Housing material	
Plastic version	Polycarbonate, black, UL 94 V0
Metal version	Zinc die-cast, powder-coated

Identification	Part number	Drawing	Dimensions in mm
Panel feed-through set, 8-poles Plastic version, black Metal version Standard, grey Metal version M, black Metal version Standard, grey, with self-closing protective cap	09 45 225 1560 09 45 215 1560 09 45 215 1561 09 45 215 1562		
Han® 3 A RJ45 10G insert Cat. 6 (for Han® 3 A housings)	09 45 200 1560		
Han® 3 A RJ45 HIFF adapter to mount HIFF inserts (e.g. HARTING RJ Industrial® 10G RJ45 bulkhead or Ha-VIS preLink® RJ45) in Han® 3 A housings	09 45 515 0024		



Han® 3 A connector RJ45, 4-poles, Cat. 5

Advantages

- RJ45 Ethernet-Data connector suitable for industry
- Tool-less field-assembly with HARAX® rapid termination in IDC technology
- Category of transmission Cat. 5
- Compact design and very robust housing
- Suitable for termination of solid and stranded cables
- Up to 10 x reconductable
- PROFINET compatible
- Min. 500 mating cycles

Technical characteristics

Connector type	Han® 3 A Connector RJ45 acc. to IEC 61076-3-106 variant 5
Number of contacts	4
Transmission performance	Category 5 / Class D up to 100 MHz acc. to ISO/IEC 11801:2002, EN 50 173-1
Transmission rate	10/100 Mbit/s
Shielding	fully shielded, 360° shielding contact
Cable termination	tool-less with IDC contacts
Conductor cross section	
stranded	AWG 24/7 - AWG 22/7
solid	AWG 23/1 - AWG 22/1
Conductor diameter	max. 1.6 mm
Cable outer diameter	6.5 mm – 9.5 mm
Degree of protection	IP65 / IP67
Temperature range	-40 °C ... +70 °C
Housing material	
Plastic version	Polycarbonate, UL 94 V0, black
Metal versions	
Standard	Zinc die-cast, powder coating grey
M-version	Zinc die-cast, powder coating black

Identification	Part number	Drawing	Dimensions in mm
Han® 3 A connector set RJ45, 4-poles incl. housing, cable gland and instruction manual		<p>Steckgesicht nach IEC 60 603.7</p>	
Plastic version, black	straight angled		09 45 125 1100 09 45 125 1104
Metal version Standard, grey	straight angled		09 45 115 1100 09 45 115 1104
Metal version M, black	straight angled		09 45 115 1102 09 45 115 1106
Coding pin set			09 45 820 0000
			Dimensions valid for plastic version, straight



Han® 3 A connector set RJ45, 8-poles, Cat. 6_A

Advantages

- RJ45 Ethernet-Data connector suitable for industry
- Field-assembly with mounting tool
- Category of transmission Cat. 6_A
- Compact design and very robust housing
- Min. 500 mating cycles

Technical characteristics

Connector type	Han® 3 A Connector RJ45
Number of contacts	8
Transmission performance	Category 6 _A / Class E _A up to 500 MHz acc. to ISO/IEC 11801:2002, EN 50 173-1
Transmission rate	10/100 Mbit/s and 1/10 Gbit/s
Shielding	fully shielded, 360° shielding contact
Cable termination	with piercing contacts
Conductor cross section	AWG 28/7 - AWG 24/7, stranded
Conductor diameter	max. 1.05 mm
Cable outer diameter	6.5 mm – 9.5 mm
Degree of protection	IP65 / IP67
Temperature range	-40 °C ... +70 °C
Housing material	Polycarbonate, UL 94 V0, black
Plastic version	
Metal versions	
Standard	Zinc die-cast, powder coating grey
M-version	Zinc die-cast, powder coating black

Identification	Part number	Drawing	Dimensions in mm
Han® 3 A connector set RJ45, 8-poles, Cat. 6 incl. housing, cable gland and instruction manual		<p>Mating face acc. to IEC 60603-7</p>	
Plastic version, black	09 45 125 1520		
Metal version Standard, grey	09 45 115 1520		
Metal version M, black	09 45 115 1522		
Han® 3 A RJ45 connector insert can be combined with Han® 3 A housing	09 45 100 1520		
Coding pin set	09 45 820 0000		
suitable assembly tool	09 45 800 0520		

Dimensions valid for metal version Standard



Han® 3 A RJ45 10G connector, 8-poles, Cat. 6


Advantages

- RJ45 Ethernet-Data connector suitable for industry
- Tool-less field-assembly with *HARAX*® rapid termination in IDC technology
- Category of transmission Cat. 6
- Compact design and very robust housing
- Suitable for termination of solid and stranded cables
- PROFINET compatible
- Min. 500 mating cycles

Technical characteristics

Connector type	Han® 3 A Connector RJ45 acc. to IEC 61076-3-106 variant 5
Number of contacts	8
Transmission performance	Category 6 / Class E _A up to 500 MHz acc. to ISO/IEC 11801:2002, EN 50 173-1
Transmission rate	10/100 Mbit/s and 1/10 Gbit/s
Shielding	fully shielded, 360° shielding contact
Cable termination	tool-less with IDC contacts
Conductor cross section	
stranded	AWG 27/7 - AWG 22/7
solid	AWG 24/1 - AWG 22/1
Conductor diameter	max. 1.6 mm
Cable outer diameter	6.5 mm – 9.5 mm
Degree of protection	IP65 / IP67
Temperature range	-40 °C ... +70 °C
Housing material	
Plastic version	Polycarbonate, UL 94 V0, black
Metal versions	
Standard	Zinc die-cast, powder coating grey

Identification	Part number	Drawing	Dimensions in mm
Han® 3 A RJ45 connector, 8-poles incl. housing, cable gland and instruction manual			
Plastic version, black straight	09 45 125 1560		
Metal version Standard, grey straight	09 45 115 1560		
Han® 3 A RJ45 connector insert straight	09 45 100 1560		
can be combined with Han® 3 A housing			
Coding pin set	09 45 820 0000		
			Dimensions valid for plastic version, straight

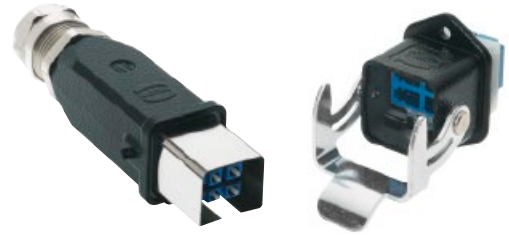

Han® 3 A 2 x LC duplex

Advantages

- Compact, space-saving Design
- Just one LWL modul for high mechanical load
- High packing density
- A & B parts identification according to TIA 568 standard

Technical characteristics

Degree of protection	IP65 / IP67
Temperature range	-40 °C ... +70 °C
Housing material	Zinc die-cast powder coating black

Identification	Part number	Drawing	Dimensions in mm
Components device side Multimode GOF Singlemode GOF	09 57 467 0004 000 09 57 467 0005 000		
Connector Multimode GOF Singlemode GOF	09 57 407 0001 000 09 57 407 0002 000		



Han® 3 A RJ45 Hybrid

Advantages

- RJ45 Ethernet-Data connector suitable for industry with Power contacts for hybrid applications
- Field-assembly with mounting tool
- Category of transmission Cat. 5
- Compact design and very robust housing
- Suitable for termination with solid and stranded cables
- Protection against direct contact on cable and device side according to EN 60529

Reference note:

For cat. 6 patch cords it is recommended to use 1 connector with a white cable manager and one with a blue cable manager, in order to optimise the crosstalk between different signal pairs.

Technical characteristics

Degree of protection	IP65 / IP67
Mating interface	RJ45, 8-poles acc. to IEC 60603-7 plus 3x power
Temperature range	-40 °C ... +70 °C
Housing material	Zinc die-cast, powder coating black
Data	
Transmission performance	Category 5 / Class D up to 100 MHz acc. to ISO/IEC 11801:2002, EN 50173-1
Transmission rate	10/100/1000 Mbit/s
Shielding	fully shielded, 360° shielding contact
Cable diameter stranded	AWG 28/7 - AWG 24/7
Power	
Number of contacts	3 (AC: L1, PE, N / DC: V+, GND, V-)
Working voltage	300 V AC/DC
Working current	12 A @ 70 °C (see current carrying capacity Han D® contacts)
Cable diameter	2.5 mm ²

Identification	Part number	Drawing	Dimensions in mm
Components device side incl. 3x Han D® female contacts			
AC version	09 57 368 0500 000		
DC version	09 57 368 0501 000		
Cable side Connector incl. 3x Han D® male contacts			
AC version	09 57 308 0500 000		
DC version	09 57 308 0501 000		
suitable assembly tool	09 45 800 0520		



Hybrid cable assembly

Man

Identification	Part number	Drawing	Dimensions in mm
<p>Hybrid cable, double ended, 4 x 2 x AWG 26/7 + 3 x 2.5 mm²</p> <p>Length: 1 m AC version DC version</p> <p>Length: 5 m AC version DC version</p> <p>Length: 10 m AC version DC version</p> <p>Length: 20 m AC version DC version</p>	<p>33 57 211 0010 001 33 57 211 0010 002</p> <p>33 57 211 0050 001 33 57 211 0050 002</p> <p>33 57 211 0100 001 33 57 211 0100 002</p> <p>33 57 211 0200 001 33 57 211 0200 002</p>	<p>double ended</p> <p>a = length</p>	
<p>Hybrid cable, single ended, 4 x 2 x AWG 26/7 + 3 x 2.5 mm²</p> <p>Length: 1 m AC version DC version</p> <p>Length: 5 m AC version DC version</p> <p>Length: 10 m AC version DC version</p> <p>Length: 20 m AC version DC version</p>	<p>33 57 111 0010 002 33 57 111 0010 001</p> <p>33 57 111 0050 002 33 57 111 0050 001</p> <p>33 57 111 0100 002 33 57 111 0100 001</p> <p>33 57 111 0200 002 33 57 111 0200 001</p>	<p>Protection level: IP65 / IP67</p> <p>Data part: Transmission properties in accordance with ISO/IEC 11801:2002: Class D</p> <p>single ended</p> <p>a = length</p>	
<p>Hybrid outdoor cable</p> <p>Length: 10 m</p> <p>Length: 20 m</p> <p>Length: 500 m</p>	<p>33 57 851 0100 001</p> <p>33 57 851 0200 001</p> <p>33 57 851 5000 001</p>	<p>PVC jacket 4 x 2 x AWG 26/7 + 3 x 2.5 mm² Outer diameter: 12 mm Min. bending radius: single: 5 x OD repeated: 10 x OD</p>	



Han® 3 A LC duplex Hybrid

Advantages

- Small form factor (compared to SC and ST®)
- Compact, space-saving Design
- Combined to only one LWL-module for high mechanical load
- High packing density
- A & B parts identification according to TIA 568 standard

Technical characteristics

Degree of protection	IP65 / IP67
Temperature range	-40 °C ... +70 °C
Data	
Mating module	LC duplex (2 fibres)
Cable diameter	6.0 ... 9.0 mm
Power	
Number of contacts	3 (AC: L1, PE, N / DC: V+, GND, V-)
Working voltage	300 V AC/DC
Working current	12 A @ 70°C
Housing material	Aluminium die-cast, black

Identification

Part number

Drawing


Dimensions in mm

Components device side

Power: 3x Han D® male contacts

Data: Multimode GOF	AC	09 57 568 0500 000
	DC	09 57 568 0510 000

Data: Singlemode GOF	AC	09 57 568 0501 000
	DC	09 57 568 0511 000

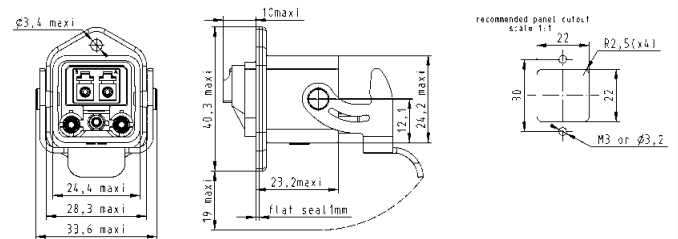



Connector

Power: 3x Han D® female contacts

Data: Multimode GOF	AC	09 57 508 0500 000
	DC	09 57 508 0510 000

Data: Singlemode GOF	AC	09 57 508 0501 000
	DC	09 57 508 0511 000

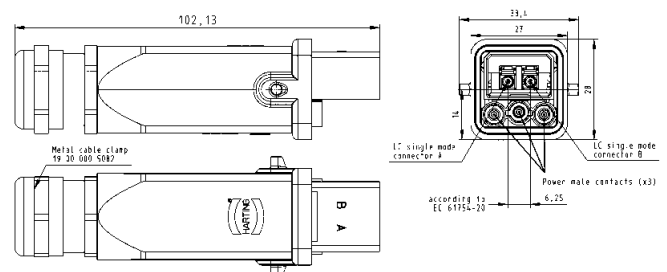

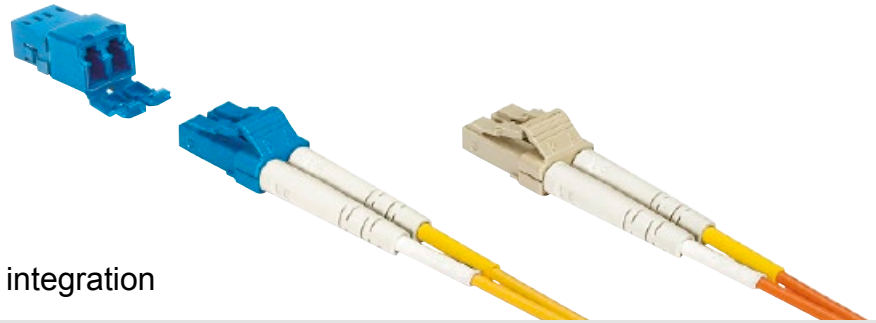

LC duplex IP20 adapter for device integration

Advantages

- Small form factor (compared to SC and ST®)
- Compact, space-saving Design
- High packing density
- A & B parts identification according to TIA 568 standard
- Complement adapter for IP67 connector on device side

Technical characteristics

Degree of protection	IP20
Mating interface	LC duplex with two fibres
Temperature range	-40 °C ... +70 °C

Identification

Part number

Drawing

Dimensions in mm


Device side Adapter

Multimode GOF

09 57 400 0003 000

Singlemode GOF

09 57 400 0004 000

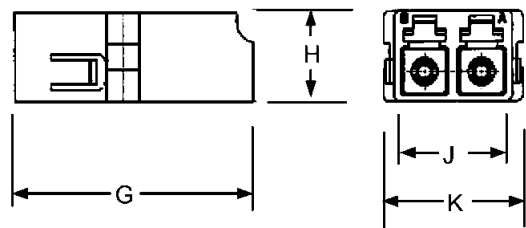

	min.	max.
G	26.60	26.80
H	9.35	9.45
J	12.80	12.90
K	15.24	15.34



Connector LC duplex

Multimode GOF

09 57 400 0001 000

Singlemode GOF

09 57 400 0002 000

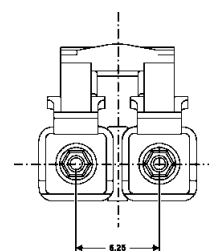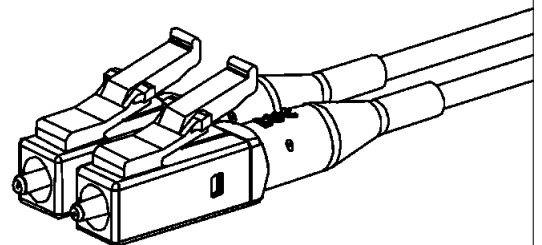



Han® 3 A RJ45, Hybrid

General information


With the RJ Industrial Hybrid connector, HARTING has developed an interface solution that integrates the data lines and the power supply into one connector for hybrid Ethernet networks. The connector's geometry nevertheless maintains a clear separation between the data and the power contacts. This brings a significant reduction in the costs of installation and of field devices suitable for industrial application with hybrid cabling.

The panel feed-through is compatible with RJ45 connectors, which means that the standard patch cables for service and test purposes can be used. The data lines are connected at the rear via an RJ45 jack, while the power lines use a cage clamp terminal.

Optional the hybrid interface can be integrated in the device directly, thus preventing the use of rear side data lines.

The four power contacts of the hybrid module have also been designed with HARAX® rapid termination technology, allowing stranded cables of up to 1.5 mm² to be connected.

Current carrying capacity „Power contacts“

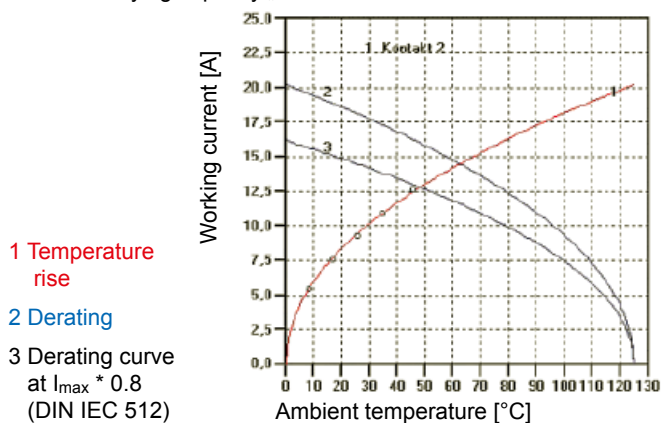

Technical characteristics

Connector	
Degree of protection	IP65 / IP67
Mating interface	RJ45, 4-poles acc. to IEC 60603-7 plus 4x power
Temperature range	-40 °C ... +70 °C
Housing material	
Plastic version	UL 94 V0, black
Metal version	Zinc die-cast, grey
Mating cycles	min. 500
Mounting	field-assembly
Data Cat. 5, 4-poles	
Transmission performance	Category 5 / Class D up to 100 MHz acc. to ISO/IEC 11801:2002, prEN 50173-1
Transmission rate	10/100 Mbit/s
Cable diameter	
stranded	AWG 24/7 - AWG 22/7
solid	AWG 23/1 - AWG 22/1
Data Cat. 6, 8-poles	
Transmission performance	Category 6 / Class EA up to 500 MHz acc. to ISO/IEC 11801:2002, prEN 50173-1
Transmission rate	10/100 Mbit/s / 1 Gbit/s
Cable diameter	
stranded / solid	AWG 27 - AWG 22
Both, data Cat. 5 and Cat. 6	
Shielding	fully shielded, 360° shielding contact
Cable outer diameter	10.0 mm – 11.0 mm
Power	
Number of contacts	4 for cable diameter 1.5 mm ² stranded
Working voltage	48 V
Working current	16 A, see current carrying capacity
	UL approved (E102079)
Panel feed-through	
Mating interface extern:	RJ45 female acc. to IEC 60603-7 plus 4 x power
Mating interface intern:	RJ45 female acc. to IEC 60603-7 4 x power via cable cage clamp 1.5 mm ²



Han® 3 A, Hybrid, components device side panel feed-throughs

Identification	Part number	Drawing	Dimensions in mm
RJ45 female for direct device integration solder variant SMD 90° angled I	09 45 551 1100 ¹⁾ 09 45 551 1110 ²⁾		pcb layout
Power module with 4 contacts for direct device integration Reel with 100 pieces II	09 45 525 0040 09 45 525 0041		recommended PCB power layout (SMD) scale: 4:1
Housing bulkhead mounting separate incl. flat seal for direct device integration Plastic version, black Metal version Standard, grey Metal version M, black Metal version EMC, unpainted III	09 45 525 0021 10 12 005 1004 09 45 525 0027 09 45 525 0028		<p>Dimensions valid for plastic version</p>
Panel feed-through set Plastic version, black, Cat. 5 Metal version Standard, grey, Cat. 5 Metal version M, black, Cat. 5 Metal version Standard, grey, Cat. 6 Metal version M, black, Cat. 6 IV	09 45 225 1300 10 12 005 1002 09 45 215 1301 09 45 215 1760 09 45 215 1761		
Protection cover for panel feed-through IP65 / IP67 Plastic version, black Metal version Standard, grey Metal version M, black	09 20 003 5449 09 20 003 5425 09 37 003 5405		

1) Packaging: Blister à 120 pieces

2) Packaging: Tape & Reel à 130 pieces


Technical characteristics and general informations see page 04.15



Han® 3 A RJ45, Hybrid

Identification	Part number	Drawing	Dimensions in mm
Connector, Cat. 5, 4 + 4-poles (IDC termination for RJ45 insert)			
Plastic version, black	09 45 125 1300		
Metal version Standard, grey	10 12 005 2001		
Connector, Cat. 6, 8 + 4-poles (IDC termination for RJ45 insert)			
Plastic version, black	09 45 125 1760		
Metal version Standard, grey	09 45 115 1760		
Connector insert for Han® 3 A housings	09 45 100 1760		
Connector, Cat. 6, 8 + 4-poles (with piercing connection AWG 28/7 - 24/7)			
Plastic version, black	09 45 125 1720		
Metal version Standard, grey	09 45 115 1720		
Connector insert for Han® 3 A housings	09 45 100 1720		
suitable assembly tool	09 45 800 0520		
Protection cover for connector IP65 / IP67 without seal			
Plastic version, black	09 20 003 5442		
Metal version Standard, grey	09 20 003 5422		
Metal version M	09 37 003 5402		

Dimensions valid for plastic version

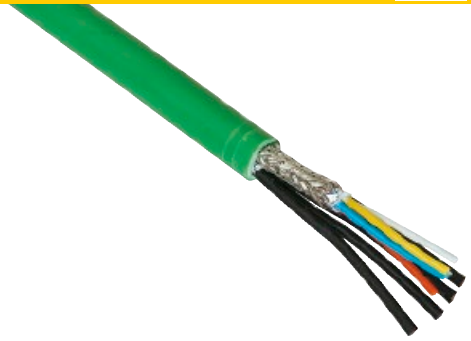

PROFINET Type B cable, Hybrid
Industrial Cat. 5 Hybrid cable, 4-wire + 4x Power
to make up Hybrid system cables

Han

Advantages

- Robust design for industrial environment
- PROFINET-conform
- Additional power supply
- Hybrid Cat. 5 cable, 4-wire + 4x Power

Technical characteristics

Cable construction	Star quad + 4 Power cables, double shielded
Core structure	4 x AWG 22/7 + 4 x 1.5 mm ² (conductor 84 x 0.15 mm ²)
Sheath material	FRNC
Cable outer diameter	9.7 mm
Transmission performance	Category 5 / Class D up to 100 MHz acc. to ISO/IEC 11801:2002, EN 50173-1
Transmission rate	10/100 Mbit/s
Shielding	Shielding foil and shielding braid
Temperature range	-20 °C ... +70 °C
Standard lengths	10 m / 20 m / 50 m / 100 m
Colour	green

Identification


PROFINET Type B cable, Hybrid
Industrial Cat. 5 Hybrid cable,
4-wire + 4x Power

10 m ring
20 m ring
50 m ring
100 m ring
500 m reel

Part number

09 45 600 0310
09 45 600 0330
09 45 600 0340
09 45 600 0300
09 45 600 0320

Drawing

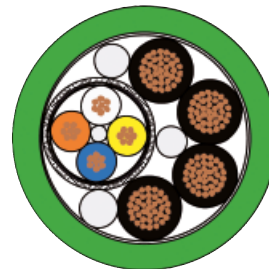

Dimensions in mm



Industrial Cat. 6 Hybrid
Installation cable, 8-wire

Advantages

- Robust design for industrial environment
- PROFINET-conform
- Additional power supply
- Hybrid Cat. 6 cable, 4-wire + 4x Power

Technical characteristics

Cable structure	4 x 2, Twisted Pair, shielded, PIMF 4 power cores
Core structure	4 x 2 x AWG 26/7, stranded 4x 84 * 0.15 mm (cord 1.5 mm²), stranded
Sheath material	PUR
Cable sheath diameter	10 ... 10.6 mm
Transmission performance	Category 6 / Class E up to 250 MHz according to ISO/IEC 11801:2002, EN 50 173-1
Transmission rate	10/100/1000 Mbit/s
Shielding	Paired shielded with additional cable shield
Operating temperature range	-20 °C ... +80 °C
Supply lengths	20 m / 50 m / 100 m other lengths on request
Colour	black

Identification

Industrial Cat. 6 Hybrid
installation cable,
8-wire
PUR

20 m ring
50 m ring
100 m drum

Part number

09 45 600 0332
09 45 600 0342
09 45 600 0302

Drawing



Dimensions in mm

Features


General Description

The Han-Brid® series allows the connection of a data interface and a power supply in a single space saving connector. This means that it is now possible to provide data transmission and power to devices in a single bus structure. This hybrid connector family includes provision for connection of a max. 50 V, 10 A power supply together with a range of inserts for connection of a variety of data protocols and transmission medias:

- Han-Brid® F.O. for plastic (POF) or for HCS®* optical fibre
- Han-Brid® Cu for shielded twisted pair.
- Han-Brid® Quintax 3 A for shielded 4 wire bus systems (2 pair STP)
- Han-Brid® RJ45 C for Ethernet application
- Han-Brid® USB / Firewire for fast data transmission

Han-Brid® inserts fit to the standard plastic as well as metal hoods and housings with seal of the Han® 3A series offering a degree of protection IP65 according to DIN EN 60 529. For harsher environments Han® 3 HPR hoods and housings with a degree of protection of IP68 can be used.

Power supply

- Han D® male and female with standard crimp contacts
- Rated current 10 A
- Rated voltage 50 V
- Wire gauge 0.14 - 2.5 mm²
- Approval 

Data interfaces

Han-Brid® F.O.

- Is suitable for all HP Versatile Link (Horizontal Package) transmitters and receivers
- Data rates: Standard 12 Mbit/s, suitable for all common fieldbus systems
- Insert allows integration of HP standard contacts for POF and HCS®* fibres
- Temperature range -40 °C ... +70 °C

Han-Brid® Cu

- For termination of a shielded twisted pair
- Insert for 2x Han D® male or female contacts
- Connection of the shield by means of shielding plate and fixing clamps
- Connection of the device side can be realized either by a printed circuit board as a modular version or as part of the appliance PCB
- Insert for bulkhead mounted housing or the coupling housing are always equipped with a screening spring

Bus Terminator

- Active bus terminator in male and female version
- Standard Han® 3 A hoods and housings
- Power supply to the termination network via electrical contacts of Han-Brid®
- Integrated, galvanically separated DC/DC converter 24 V / 5 V

Han-Brid® Quintax 3 A

- Possibility to terminate shielded 4 wires conductors (2 pair STP)
- Suitable for all 4-wire bus systems
- Suitable for shielded cable conductor diameter 3 – 9.5 mm
- Transmission of shielding separately from the hood's ground
- Connections are carried out acc. to DIN EN 50 173, Cat. 5
- Temperature range -40 °C ... +70 °C

Han-Brid® RJ45 C

- Suitable for standard RJ45 Plug and Jack, shielded version
- Connections provided for conductors acc. to DIN EN 50 173, Cat. 5
- Termination from the device side is carried out via a PCB, two versions are possible: modular version or as part of the appliance PCB
- Assembly with standard tools
- Insert for 2 Han-D® male or female contacts offers the combination with electrical bus connector
- Rated current 10 A
- Rated voltage 24 V
- Wire gauge 0.14 - 2.5 mm²

Han-Brid® USB

- Insert for all Han® 3 A hoods and housings
- Hood with glued sealing
- Simple and low-cost termination via insert of a patch cable
- Strain-relief via cable tie

Han-Brid® FireWire


- Insert for all Han® 3 A hoods and housings
- Hood with glued sealing
- Simple and low-cost termination via insert of a patch cable
- Strain-relief via cable tie
- Compatible to IEEE 1394

* HCS® Hard Clad Silica (is registered trade mark of the SpecTran Corporation)

Overview (Sample: Han-Brid® Cu)

Thermoplastic
 09 20 003 0320 (light grey)
 09 20 003 0327 (black)

Metal
 09 20 003 0301


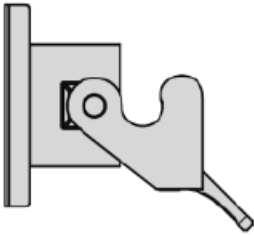


Device side
 09 12 006 2611
 09 12 006 2695
 09 12 006 2694

Cable side
 09 12 006 3111


Thermoplastic
 09 20 003 0423 (light grey)
 09 20 003 0426 (black)
 19 20 003 0423 (light grey)
 19 20 003 0427 (black)

Metal
 09 20 003 1443
 19 20 003 1443

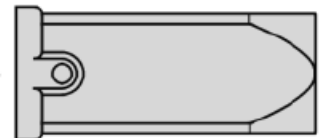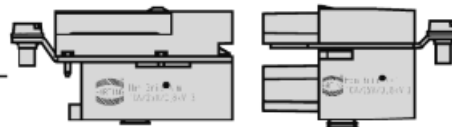

Thermoplastic
 09 20 003 0720 (light grey)
 09 20 003 0727 (black)
 19 20 003 0720 (light grey)
 19 20 003 0727 (black)

Metal
 09 20 003 1750
 19 20 003 1750

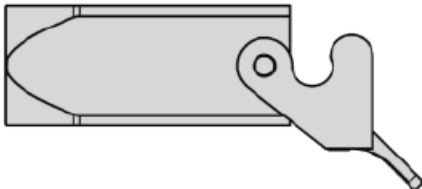


Device side
 09 12 006 2701
 09 12 006 2795
 09 12 006 2794

Cable side
 09 12 006 3001


Thermoplastic
 09 20 003 0623 (light grey)
 09 20 003 0626 (black)
 19 20 003 0623 (light grey)
 19 20 003 0627 (black)

Metal
 09 20 003 1643
 19 20 003 1643

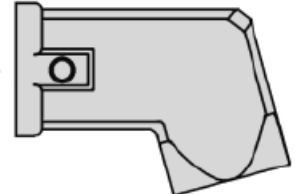



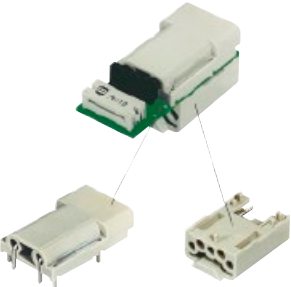


Thermoplastic
 09 20 003 0220 (light grey)
 09 20 003 0227 (light grey)
 19 20 003 0220 (light grey)
 19 20 003 0227 (black)

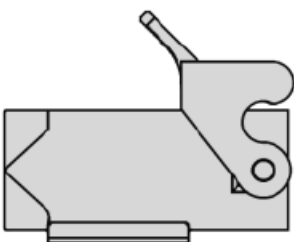
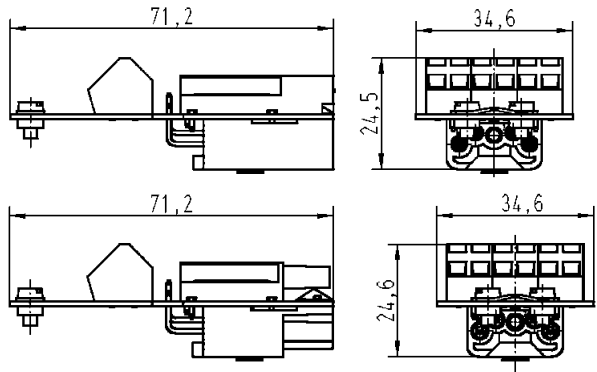

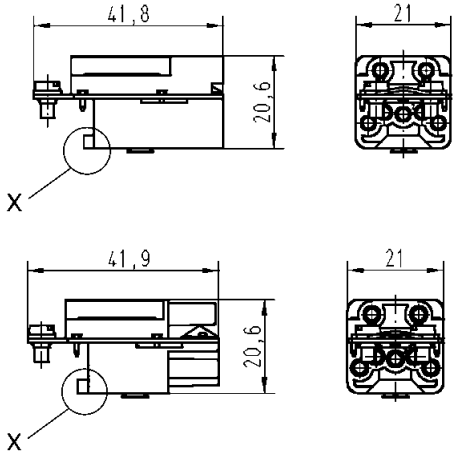



Metal
 09 20 003 1250
 19 20 003 1250

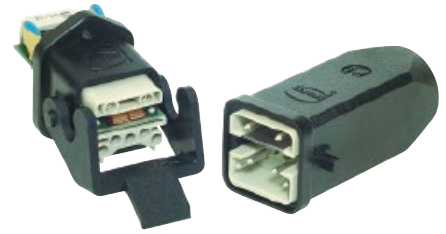


Hybrid field bus connector
for shielded twisted pair
+ 4 electrical contacts 10 A
+ option for PE



Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
<p>Cable side Female insert</p>  <p>Device side Male insert</p> 	<p>09 12 006 3111</p>	<p>09 12 006 2611</p> <p>Also available as single part</p> <p>loaded 09 12 002 2611 unloaded 09 12 002 3011</p>	<p>Also available as single part</p> <p>unloaded 09 12 004 3011</p>	<p>View from termination side</p>
<p>Cable side Male insert</p>  <p>Device side Female insert</p> 	<p>09 12 006 3001</p>	<p>09 12 006 2701</p> <p>Also available as single part</p> <p>loaded 09 12 002 2701 unloaded 09 12 002 3101</p>	<p>Also available as single part</p> <p>unloaded 09 12 004 3101</p>	<p>View from termination side</p>

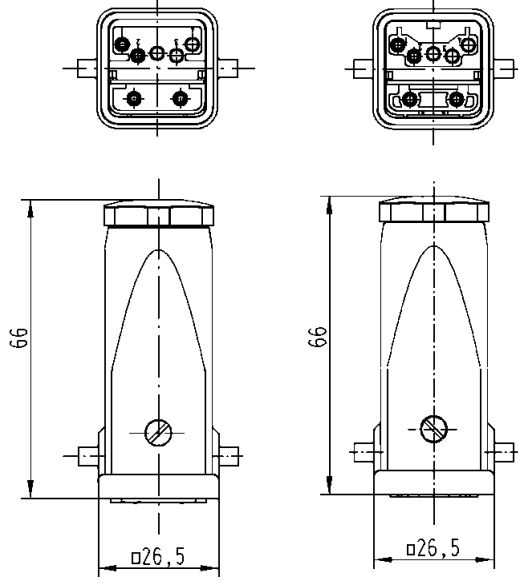Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
<p>Panel feed-through with cage clamp</p> 	09 12 006 2695			
		09 12 006 2795		
<p>Coupling / Panel feed-through</p>  <p>X = Cutting off the fin allows the use in cable to cable housings</p>	09 12 006 2694			
		09 12 006 2794		
<p>Bus terminator</p> <p>Plastic hoods/housings</p>  <p>Hoods/Housings, metal</p> 	09 12 006 2691	09 12 006 2791		
	09 12 006 2692	09 12 006 2792		

Hybrid field bus connector
with F.O. transmitter and receiver
+ 4 electrical contacts 10 A
+ option for PE

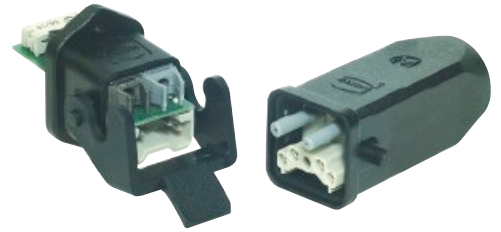

Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
<p>Cable side F.O. (m) + Han D® (f)</p>	<p>Also available as single part</p> <p>for POF 09 12 004 2711</p> <p>for POF crimpless 09 12 004 2713</p> <p>for HCS®* fibre 09 12 004 2716</p>	<p>Also available as single part</p> <p>for POF 09 12 004 3111</p> <p>for POF crimpless 09 12 004 3113</p> <p>for HCS®* fibre 09 12 004 3116</p>	<p>View from termination side</p>	
<p>Device side F.O. (f) + Han D® (m)</p>	<p>for POF 09 12 004 2611</p> <p>for POF crimpless 09 12 004 2611</p> <p>for HCS®* fibre 09 12 004 2611</p>	<p>for POF 09 12 004 3011</p> <p>for POF crimpless 09 12 004 3011</p> <p>for HCS®* fibre 09 12 004 3011</p>	<p>View from termination side</p>	
<p>Cable side F.O. (m) + Han D® (m)</p>	<p>Also available as single part</p> <p>for POF 09 12 004 2601</p> <p>for POF crimpless 09 12 004 2603</p> <p>for HCS®* fibre 09 12 004 2606</p>	<p>Also available as single part</p> <p>for POF 09 12 004 3001</p> <p>for POF crimpless 09 12 004 3003</p> <p>for HCS®* fibre 09 12 004 3006</p>	<p>View from termination side</p>	
<p>Device side F.O. (f) + Han D® (f)</p>	<p>for POF 09 12 004 2701</p> <p>for POF crimpless 09 12 004 2701</p> <p>for HCS®* fibre 09 12 004 2701</p>	<p>for POF 09 12 004 3101</p> <p>for POF crimpless 09 12 004 3101</p> <p>for HCS®* fibre 09 12 004 3101</p>	<p>View from termination side</p>	

* HCS®=Hard Clad Silica (is registered trade mark of the SpecTran Corporation)

4 contacts + shielding
+ 2 power contacts
suitable in Han® 3 A metric
hoods and housings





Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
Quintax insert 	09 15 003 3001	09 15 003 3101		
Quintax contacts Zinc alloy Order crimp contacts separately Special clamp for cable diameter 3 - 6 and 6 - 9.5 mm included in delivery range	09 15 004 3013	09 15 004 3113		

Assembly instructions

Quintax-Z-contact

- Strip cable acc. to drawing 1 and fold the shielding over the cable.
- Crimp Han D® contacts onto the wires.
- Insert Han D® contacts into corresponding cavities of insulator until they are snapped in.
- Fit the insert including the cable into the opened shielded bushing. The coding pin of the shielded bushing has to meet the groove of the insulator.
- Clamp the tilt over the shielding onto the cable by means of the special clamp (small opening for cable diameter of 3 - 6 mm, large opening for cable diameter of 6 - 9.5 mm).
- Check the wiring.
- Close the shielded bushing with the cover and insert it into the corresponding cavity of the Quintax Module as usual.

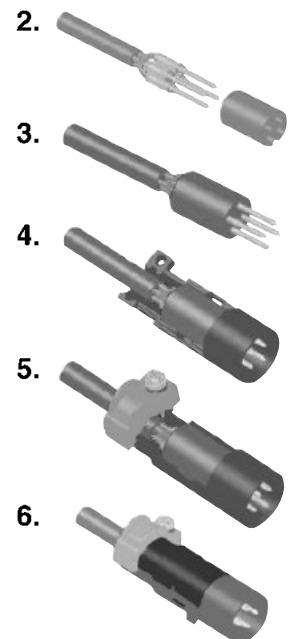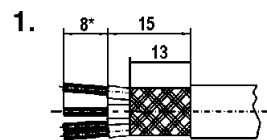




Hybrid network connector
+ 2 electrical contacts 10 A

Identification Part number Drawing Dimensions in mm

Han-Brid® RJ45 C
with RJ Industrial




09 12 003 3011

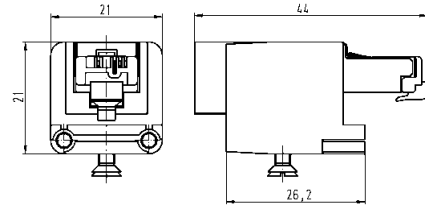

Han-Brid® RJ45 C
with Stewart RJ45




09 12 003 3021

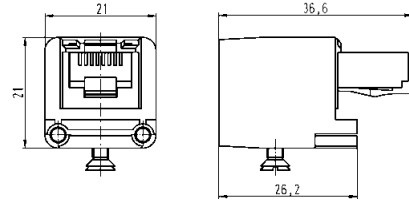

Han-Brid® RJ45 C
with HIROSE RJ45




09 12 003 3031

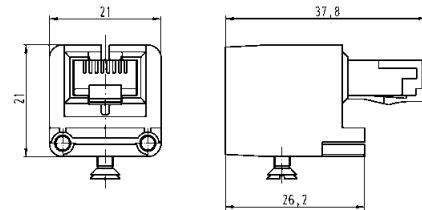

Panel feed-through
straight




09 12 003 2774

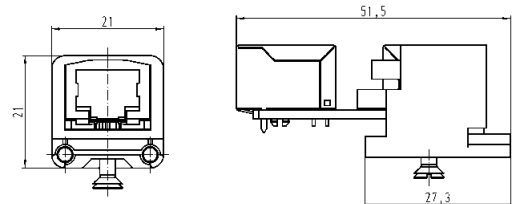

Panel feed-through
angled




09 12 003 2776

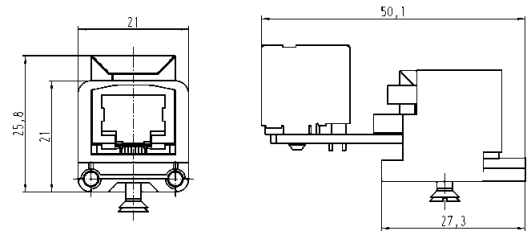

Panel feed-through
with 4-pole terminal block



09 12 003 2770

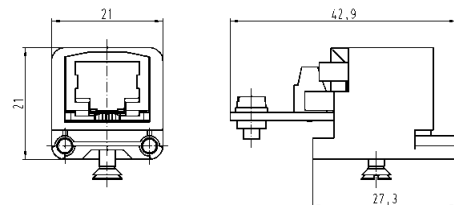

Han-Brid® USB

Features

- Insert for all Han® 3 A hoods and housings
- Hood with glued sealing
- Simple and low-cost termination via insert of a patch cable
- Strain-relief via cable tie

Technical characteristics

USB style A, 2.0 Standard

Specifications	DIN VDE 0110
	DIN EN 61984

Number of contacts	4
Electrical data	
acc. to EN 61984	1 A 50 V 0.8 kV 3
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Material	Polycarbonate
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\geq 4 \text{ m}\Omega$
Temperature range	-40 °C ... 85 °C
Flammability acc. to UL 94	V0
Mechanical working life	
- mating cycles	≥ 500

Han-Brid® FireWire

Features


- Insert for all Han® 3 A hoods and housings
- Hood with glued sealing
- Simple and low-cost termination via insert of a patch cable
- Strain-relief via cable tie
- Compatible to IEEE 1394

Technical characteristics

Firewire IEEE 1394

Specifications	DIN VDE 0110
	DIN EN 61984

Number of contacts	6
Electrical data	
acc. to EN 61984	1 A 50 V 0.8 kV 3
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Material	Polycarbonate
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\geq 4 \text{ m}\Omega$
Temperature range	-40 °C ... 85 °C
Flammability acc. to UL 94	V0
Mechanical working life	
- mating cycles	≥ 500

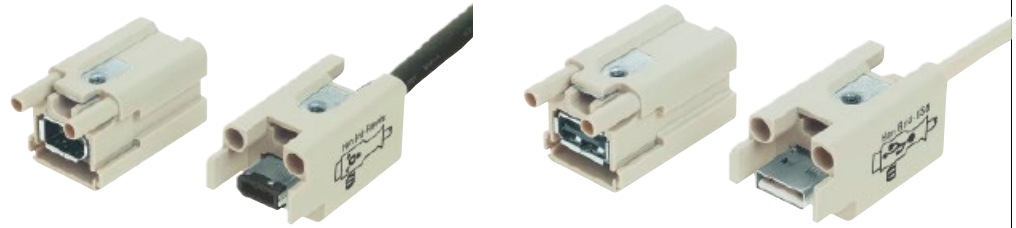


Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		




09 12 001 2794

09 12 001 3091

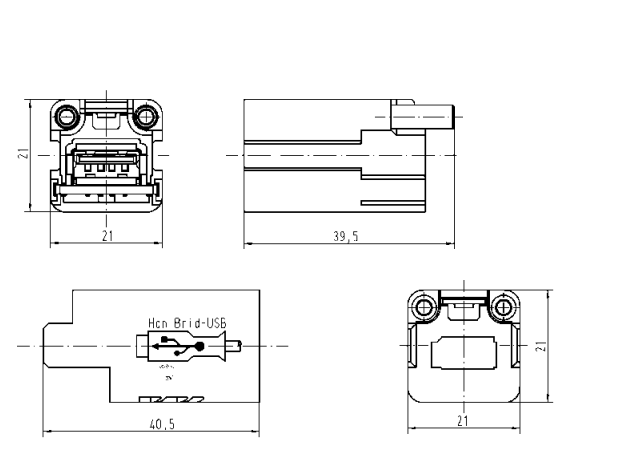

09 12 001 2774

09 12 001 3071

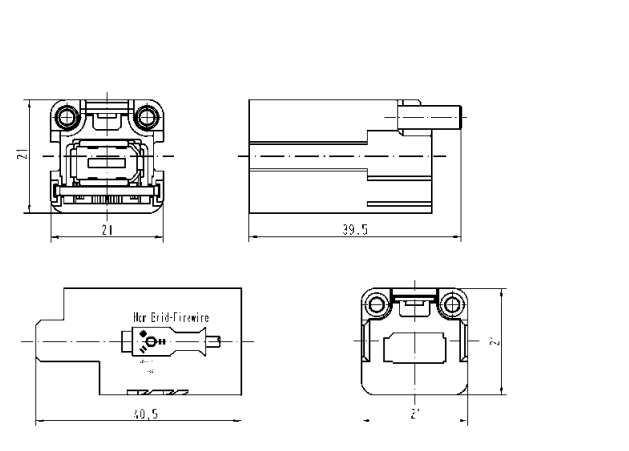



Han

Device side

Insert	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
Order contacts separately	09 12 005 3001	09 12 005 3101		
1) Distance for contact max. 21 mm				

PCB-adapter	Part number	Drawing	Dimensions in mm
with PE contact panel for Han® Q 5/0	09 12 000 9905	<p>Adapter</p>	<p>PE contact panel</p>

Solder contacts	Part number		Drawing	Dimensions in mm
	Male contact	Female contact		
to connect the PCB-adapter	09 33 000 6195	09 33 000 6295		

Housing	bulkead mounting	Part number	Drawing	Dimensions in mm
		09 62 003 0304	Panel cut out 22 x 22 mm 	

Cable side

Further informations see HARTING catalogue "Industrial Connectors Han®, chapter Q"

Features

- ❑ Robust design
- ❑ Suitable for EMC housings
- ❑ Low wiring costs
- ❑ Additional robust and secure PE-connection between housing and PCB

Technical characteristics

Approvals




Inserts

Number of contacts 5

Electrical data acc. to DIN EN 61984

10 A 230/400 V 4 kV 3

Working current
 Working voltage conductor – ground
 Working voltage conductor – conductor
 Rated impulse voltage
 Pollution degree

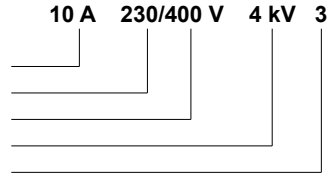


- pollution degree 2 also 10 A 320/500 V 4 kV 2


Working voltage acc. to UL/CSA 400 V

Insulation resistance $\geq 10^{10} \Omega$
 Material Polycarbonate
 Limiting temperatures $-40^\circ\text{C} \dots +125^\circ\text{C}$
 Flammability acc. to UL 94 V0
 Mechanical working life
 - Mating cycles ≥ 500

Layout of printed circuit boards

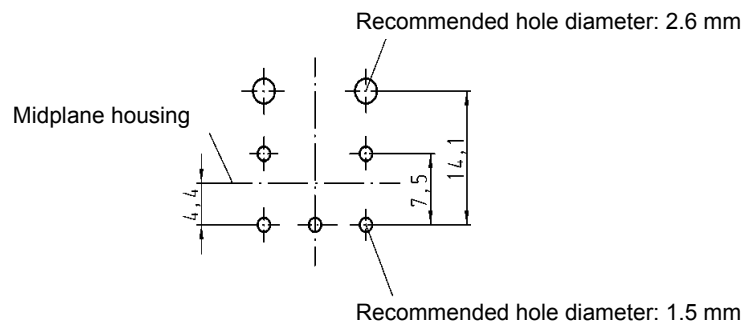

Assembly situation

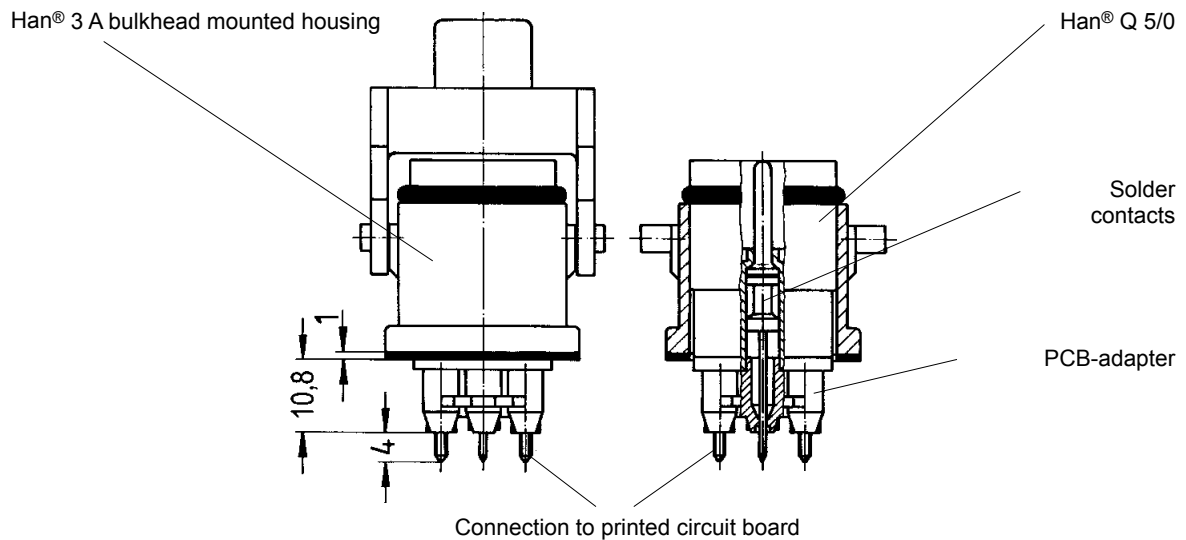



Han

Device side

Insert	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
Order contacts separately				
	09 12 007 3001	09 12 007 3101		
Coding	09 12 000 9901	09 12 000 9902		

PCB-adapter	Part number	Drawing	Dimensions in mm
for PCB up to 2.4 mm			
	09 12 000 9908		

Solder contacts	Part number		Drawing	Dimensions in mm
	Male contact	Female contact		
to connect the PCB-adapter				
	09 15 000 6190	09 15 000 6290		

Housing bulkead mounting	Part number	Drawing	Dimensions in mm
		Panel cut out 22 x 22 mm	
	09 20 003 0301		

Cable side

Further informations see HARTING catalogue "Industrial Connectors Han®, chapter Q"


Features

- ❑ Robust design
- ❑ Suitable for standard and EMC housings
- ❑ Low cost wiring
- ❑ High contact density


Technical characteristics


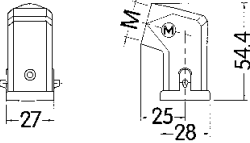




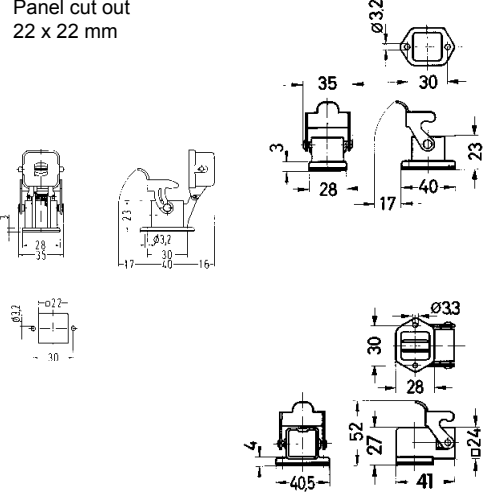

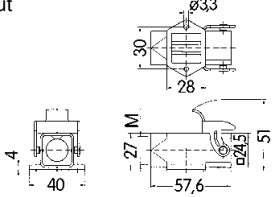






Approvals	
Inserts	
Number of contacts	7
Electrical data acc. to DIN EN 61984	7.5 A 250 V 4 kV 3
Working current	
Working voltage	
Rated impulse voltage	
Pollution degree	
Insulation resistance	≥ 10 ¹⁰ Ω
Material	Polycarbonate
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V0
Mechanical working life	
- Mating cycles	≥ 500

Layout of printed circuit boards

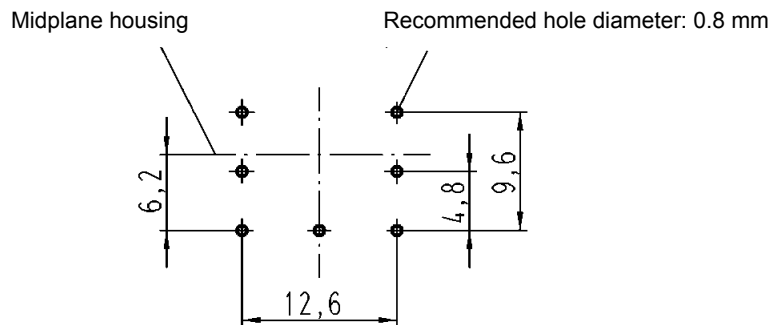
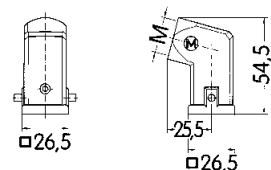


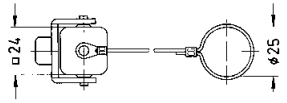

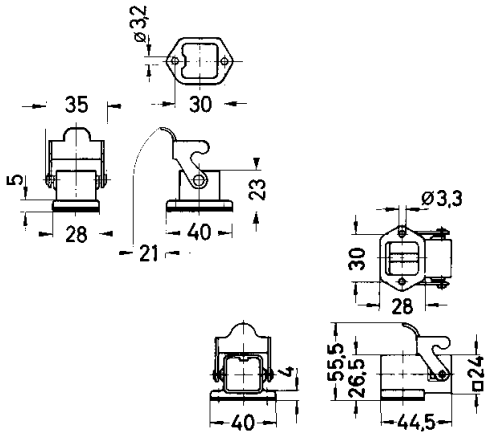

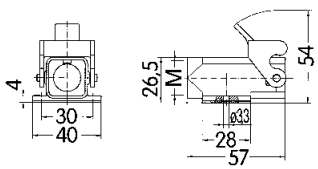

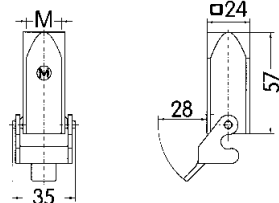



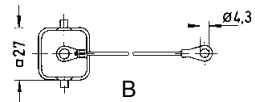

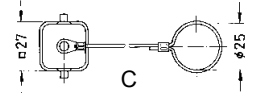


Assembly situation

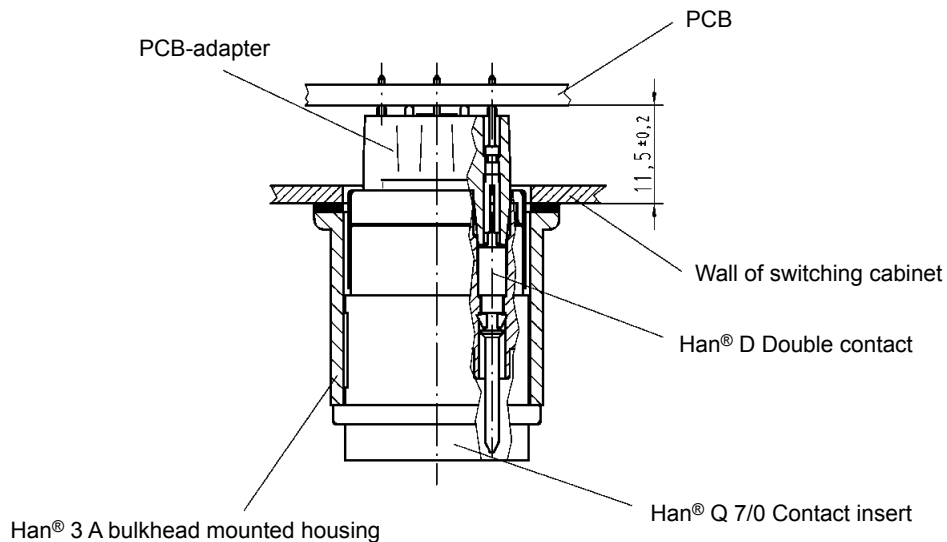

Identification		Part number	M	Drawing	Dimensions in mm
Hoods	Hood side-entry 	19 20 003 1640	20		
	Hood top-entry 	19 20 003 1440	20		
	Protection covers for hoods	09 20 003 5422¹⁾ 09 20 003 5421²⁾			
Housings	Housings bulkhead mounting 	09 20 003 0301		Panel cut out 22 x 22 mm 	
	with fixed cover	09 20 003 0305¹⁾			
	without sealing	09 20 003 0306²⁾			
	with sealing	09 20 003 0801			
	Housing surface mounting 1 side-entry bottom closed 	19 20 003 1250	20	Panel cut out 22 x 22 mm 	
		19 20 003 1252	20		
	Housing screw mounting 	19 20 003 1150	20		
Hood cable to cable 	19 20 003 1750	20			
Protection covers for housings	09 20 003 5426¹⁾ 09 20 003 5425²⁾				
for hoods cable to cable	09 20 003 5428¹⁾ 09 20 003 5427²⁾				

¹⁾ for mounted male insert
²⁾ for mounted female insert

Identification			Part number	M	Drawing	Dimensions in mm
Hoods	Hoods side-entry		grey 19 20 003 0620 black 19 20 003 0627	20 20		
	Hoods top-entry		grey 19 20 003 0420 black 19 20 003 0427	20 20		
	Protection covers for hoods		09 20 003 5442 ¹⁾ 09 20 003 5441 ²⁾			
Housings	Housings bulkhead mounting		grey 09 20 003 0320 black 09 20 003 0327 grey 09 20 003 0820 black 09 20 003 0827	- - - -		
	Housings surface mounting 1 side-entry		grey 19 20 003 0220 black 19 20 003 0227	20 20		
	Hoods cable to cable		grey 19 20 003 0720 black 19 20 003 0727	20 20		
	Protection covers for housings	A 	09 20 003 5407 ¹⁾ 09 20 003 5408²⁾			
		B 	09 20 003 5445²⁾ 09 20 003 5446 ¹⁾ 09 20 003 5447 ²⁾ ³⁾			
	for hoods cable to cable C 	09 20 003 5448 ¹⁾ 09 20 003 5449 ²⁾				

Han

1) for mounted male insert
2) for mounted female or Han-Brid® insert
3) for metal housings and cable to cable hoods also

Stock items in bold type



Insert		Part number		Drawing	Dimensions in mm
Order contacts separately		Male insert (M)	Female insert (F)		
		09 12 006 3041	09 12 006 3141		<p>Contact arrangement View from termination side</p>
PCB-adapter		Part number		Drawing	Dimensions in mm
for PCBs up to 2.4 mm					
		09 12 006 9901			
Han® Q 4/2 double contacts		Part number		Drawing	Dimensions in mm
to connect the PCB adapter		Male contact	Female contact		
<p>Power contact</p>		09 32 000 6180	09 32 000 6280		
<p>Signal contact</p>		09 15 000 6191	09 15 000 6293		
Housing bulkead mounting		Part number		Drawing	Dimensions in mm
Plastic					
		09 12 008 0327		<p>Panel cut out</p>	

Han

Device side

Cable side


Features

- ❑ Robust Design
- ❑ Suitable for Han-Compact® hoods and housings
- ❑ Low wiring costs
- ❑ High contact density


Technical characteristics

Approvals	
Number of contacts	4/2 + PE
Electrical data acc. to DIN EN 61984	
Power area	30 A 400/690 V 6 kV 2
Rated current	30 A
Rated voltage	
conductor - ground	400 V
conductor - conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	2
Signal area	7.5 A 250 V 4 kV 2
Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Insulation resistance	$\geq 10^{10} \Omega$
Material	LCP
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V0
Mechanical working life	≥ 500 mating cycles

Layout of printed circuit boards

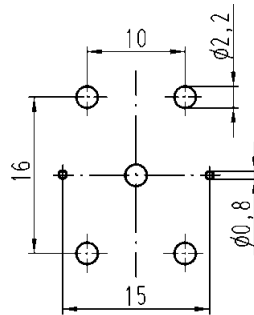

Assembly situation

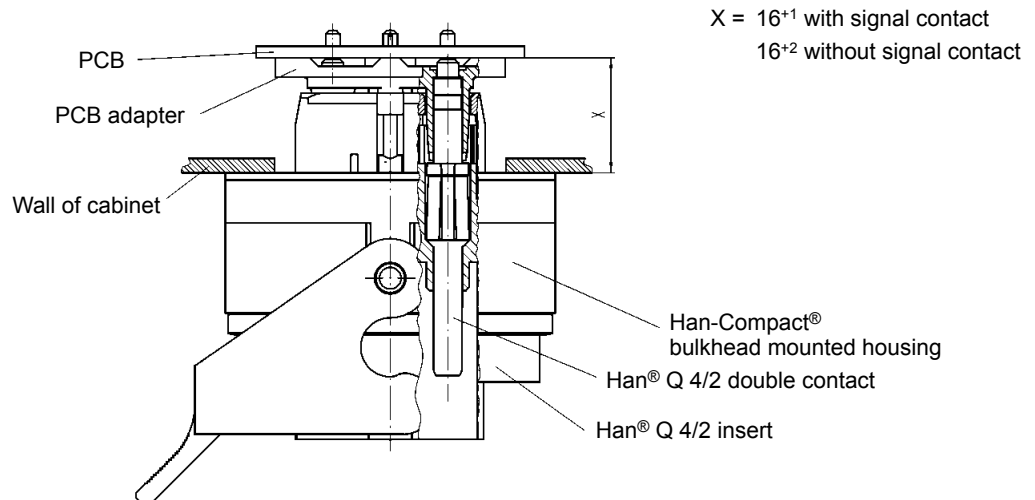



Insert	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
Order contacts separately 	09 12 008 3001	09 12 008 3101		Contact arrangement View from termination side
PCB-adapter	Part number		Drawing	Dimensions in mm
for PCBs up to 1.6 mm	09 12 008 9901			
Han® Q 8/0 double contacts	Part number		Drawing	Dimensions in mm
to connect the PCB adapter	Male contact	Female contact		
	09 33 000 6180	09 33 000 6280		
Housing	Part number		Drawing	Dimensions in mm
bulkead mounting	09 12 008 0327			
Plastic 			Panel cut out 	

Device side

Cable side


Features

- ❑ Robust Design
- ❑ Suitable for Han-Compact® hoods and housings
- ❑ Low wiring costs
- ❑ High contact density


Technical characteristics

Approvals	
Number of contacts	8
Electrical data acc. to DIN EN 61984	16 A 230/400 V 4 kV 2
Rated current	16 A
Rated voltage	
conductor - ground	230 V
conductor - conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	2
Insulation resistance	$\geq 10^{10} \Omega$
Material	LCP
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V0
Mechanical working life	≥ 500 mating cycles

Layout of printed circuit boards

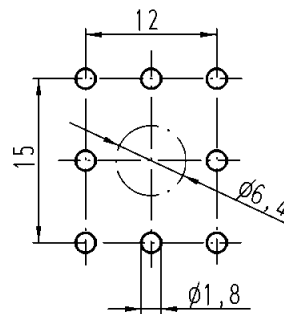

Assembly situation

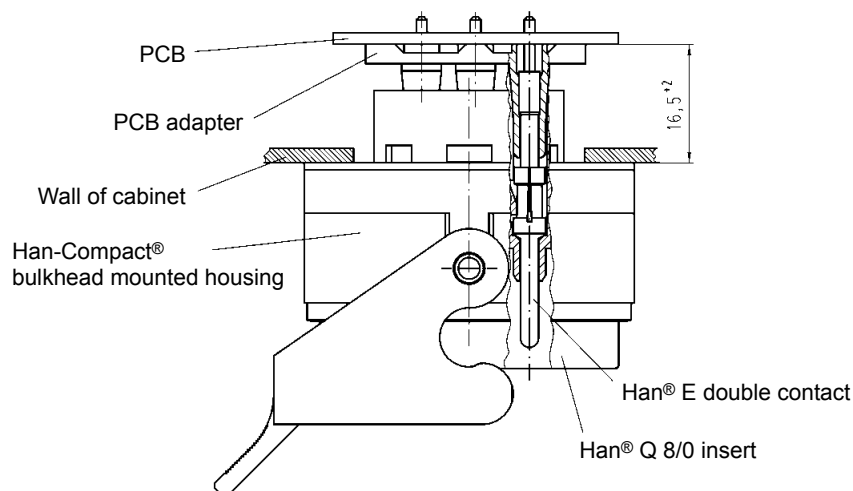

thermoplastic / metal

Identification

Part number

Drawing

Dimensions in mm

Hoods



Hoods

Thermoplastic
side-entry
Cable gland order separately



09 12 008 0527

Pg 16





Hoods

Thermoplastic
top-entry
Cable gland order separately



19 12 008 0429
09 12 008 0427
09 12 008 0429

M 25
Pg 16
Pg 21



h	g
14	M 25x1.5
13	Pg 16
13	Pg 21



Hoods

Thermoplastic
top-entry
Cable gland order separately



09 12 008 0428

Pg 16




Cable seal

Thermoplastic
for hoods
Thrust bolt and insert



09 00 000 5059
19 12 000 5157
19 12 000 5158
09 00 000 5157
09 00 000 5158

Pg 16
M 25
M 25
Pg 21
Pg 21



	cable	
	min.	max.
09 00 000 5059	11.5 mm	15.5 mm
19 12 000 5157	10.5 mm	14 mm
19 12 000 5158	14 mm	17 mm
09 00 000 5157	14 mm	18 mm
09 00 000 5158	17 mm	20.5 mm

Hoods/housings Han-Compact®



thermoplastic / metal

Identification

Part number

Drawing

Dimensions in mm

Hoods


Hoods

Metal
side-entry
Cable gland order separately



19 12 008 0526

M 25

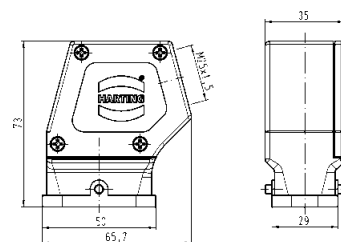

Hoods

Metal
side-entry
Cable gland order separately



black
chromated
19 12 008 0501


M 25

black
powder coated
19 12 708 0501

M 25

matt
nickel plated
19 12 008 0502

M 25

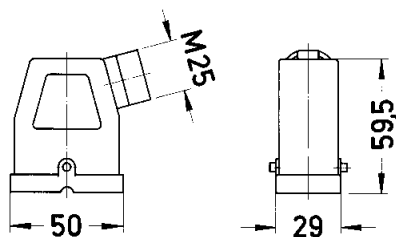


Hoods

Metal
top-entry
Cable gland order separately



19 12 008 0426

M 25

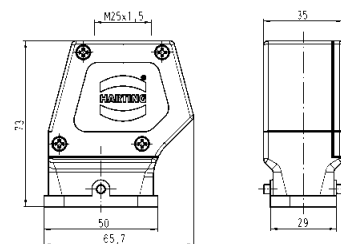


Cable seal

Metal
for hoods
Thrust bolt and insert



19 12 000 5057
19 12 000 5058

M 25
M 25

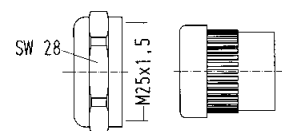

	cable	
	min.	max.
19 12 000 5057	10.5 mm	14 mm
19 12 000 5058	14 mm	17 mm

Identification

Part number
for male insert for female insert

Drawing

Dimensions in mm


Protection covers

Thermoplastic
for male insert



without sealing
09 12 008 5407

with sealing
09 12 008 5408



Han

thermoplastic / metal

Identification

Part number

Drawing

Dimensions in mm

Housings


Housings,
bulkhead mounting

Thermoplastic
angled



09 12 008 0902

Pg 16

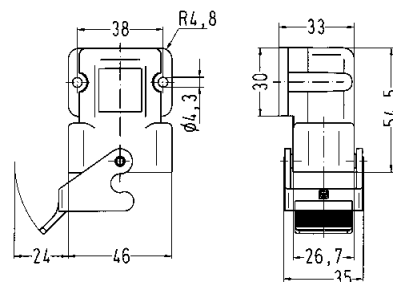


Housings,
bulkhead mounting

Thermoplastic



09 12 008 0327

Pg 16

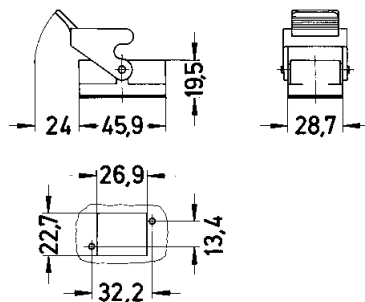


Gasket for housings
bulkhead mounting

Han® Q 8/0



09 12 000 9912




Housings,
surface mounting

Thermoplastic
angled
Cable gland order separately



09 12 008 0901

Pg 16

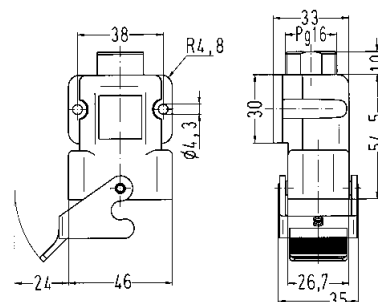


Hoods, cable to cable

Thermoplastic
Cable gland order separately



09 12 008 0727
19 12 008 0729

Pg 16
M 25

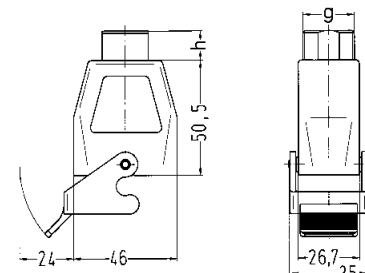

h	g
13	Pg 16
14	M 25x1.5

thermoplastic / metal

Identification

Part number

Drawing

Dimensions in mm

Housings


Cable seal

Thermoplastic
for housings
Thrust bolt and insert



09 00 000 5058

Pg 16



	cable	
	min.	max.
09 00 000 5058	11.5 mm	15.5 mm

Housings,
bulkhead mounting


Metal




black
chromated
09 12 008 0301

black
powder coated
09 12 708 0301

matt
nickel plated
09 12 008 0303

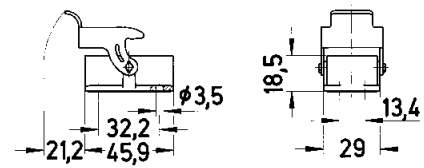

Han

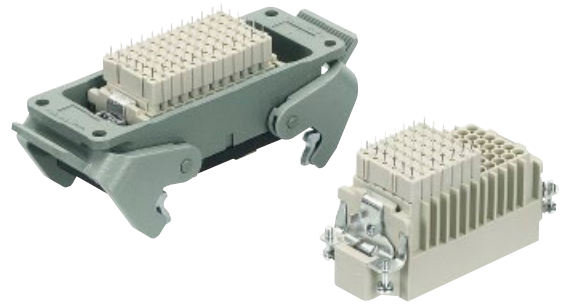

Han

Insert	Size	Part number		Drawing	Dimensions in mm															
		Male insert (M)	Female insert (F)																	
Order contacts separately					1) Distance for contact max. 21 mm <table border="1"> <thead> <tr> <th></th> <th>a</th> <th>b</th> </tr> </thead> <tbody> <tr> <td>24 DD</td> <td>44</td> <td>51</td> </tr> <tr> <td>42 DD</td> <td>57</td> <td>64</td> </tr> <tr> <td>72 DD</td> <td>77.5</td> <td>84.5</td> </tr> <tr> <td>108 DD</td> <td>104</td> <td>111</td> </tr> </tbody> </table>		a	b	24 DD	44	51	42 DD	57	64	72 DD	77.5	84.5	108 DD	104	111
	a	b																		
24 DD	44	51																		
42 DD	57	64																		
72 DD	77.5	84.5																		
108 DD	104	111																		
Han [®] 24 DD	6 B	09 16 024 3001	09 16 024 3101																	
Han [®] 42 DD	10 B	09 16 042 3001	09 16 042 3101																	
Han [®] 72 DD	16 B	09 16 072 3001	09 16 072 3101																	
Han [®] 108 DD	24 B	09 16 108 3001	09 16 108 3101																	

Han DD [®] double contacts	Part number		Drawing	Dimensions in mm
	Male contacts	Female contacts		
to connect the PCB-adapter				
	09 15 000 6191	09 15 000 6291		

Device side

PCB adapter	Part number		Drawing	Dimensions in mm						
	for PCBs up to 1.6 mm	for PCBs up to 2.4 mm								
				<table border="1"> <thead> <tr> <th></th> <th>a</th> </tr> </thead> <tbody> <tr> <td>09 16 000 9905</td> <td>2.6</td> </tr> <tr> <td>09 16 000 9908</td> <td>3.4</td> </tr> </tbody> </table>		a	09 16 000 9905	2.6	09 16 000 9908	3.4
	a									
09 16 000 9905	2.6									
09 16 000 9908	3.4									
	09 16 000 9905	09 16 000 9908								

Housing	Size	Part number		Drawing	Dimensions in mm																				
	6 B	09 30 006 0301																							
	10 B	09 30 010 0301																							
	16 B	09 30 016 0301																							
	24 B	09 30 024 0301																							
				<table border="1"> <thead> <tr> <th>Size</th> <th>a</th> <th>b</th> <th>Panel cut out</th> </tr> </thead> <tbody> <tr> <td>6 B</td> <td>70</td> <td>80</td> <td>48 x 35</td> </tr> <tr> <td>10 B</td> <td>83</td> <td>93</td> <td>60 x 35</td> </tr> <tr> <td>16 B</td> <td>103</td> <td>113</td> <td>82 x 35</td> </tr> <tr> <td>24 B</td> <td>130</td> <td>140</td> <td>108 x 35</td> </tr> </tbody> </table>	Size	a	b	Panel cut out	6 B	70	80	48 x 35	10 B	83	93	60 x 35	16 B	103	113	82 x 35	24 B	130	140	108 x 35	Size 6 B with 1 locking lever
Size	a	b	Panel cut out																						
6 B	70	80	48 x 35																						
10 B	83	93	60 x 35																						
16 B	103	113	82 x 35																						
24 B	130	140	108 x 35																						

Cable side

Further informations see HARTING catalogue "Industrial Connectors Han[®], chapter DD"

Features

- ❑ Robust design
- ❑ Suitable for standard and EMC housing
- ❑ Low wiring costs
- ❑ Higher contact density

Technical characteristics

Approvals




Inserts

Number of contacts 24, 42, 72, 108

Electrical data acc. to DIN VDE 0627

7.5 A 250 V 4 kV 3

Working current
Working voltage
Rated impulse voltage
Pollution degree

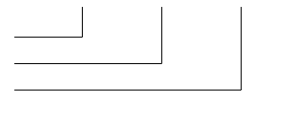

Working voltage acc. to UL

250 V

Testing voltage U_{rms}
Insulation resistance

2 kV
 $\geq 10^{10} \Omega$

Material
Limiting temperatures

Polyamide

Flammability acc. to UL 94

HB

Mechanical working life

- Mating cycles


≥ 500

Wire gauge


0.14 - 2.5 mm²

Layout of printed circuit boards


Han[®] 24 DD

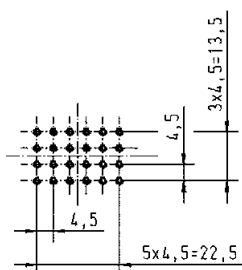


Han[®] 42 DD



Han[®] 72 DD

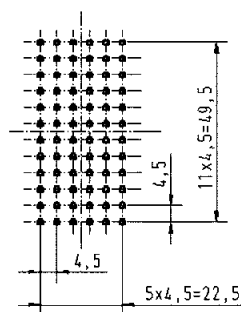


Han[®] 108 DD

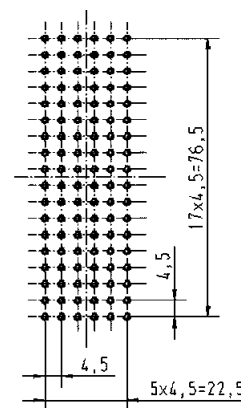


Recommended hole diameter: 0.8 mm

Assembly situation

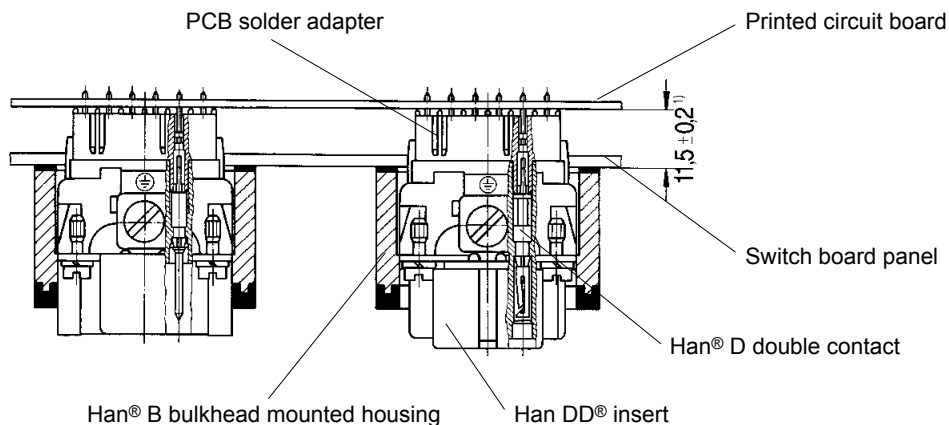

¹⁾ for Han[®] B EMC hoods/housings spacing of 12.5 ± 0.2 is necessary as no flange seal is used.

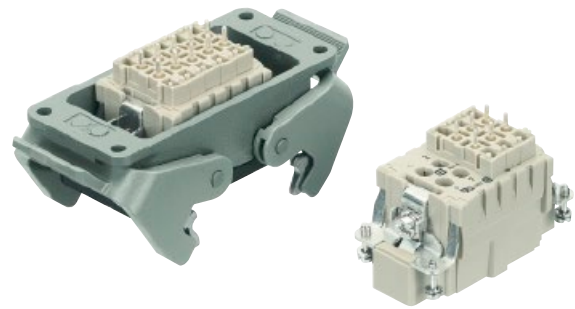

Han

Inserts	Size	Part number		Drawing	Dimensions in mm															
		Male insert (M)	Female insert (F)																	
Order contacts separately					<table border="1"> <thead> <tr> <th></th> <th>a</th> <th>b</th> </tr> </thead> <tbody> <tr> <td>6 E</td> <td>44</td> <td>51</td> </tr> <tr> <td>10 E</td> <td>57</td> <td>64</td> </tr> <tr> <td>16 E</td> <td>77.5</td> <td>84.5</td> </tr> <tr> <td>24 E</td> <td>104</td> <td>111</td> </tr> </tbody> </table>		a	b	6 E	44	51	10 E	57	64	16 E	77.5	84.5	24 E	104	111
	a	b																		
6 E	44	51																		
10 E	57	64																		
16 E	77.5	84.5																		
24 E	104	111																		
Han [®] 6 E	6 B	09 33 006 2602	09 33 006 2702																	
Han [®] 10 E	10 B	09 33 010 2602	09 33 010 2702																	
Han [®] 16 E	16 B	09 33 016 2602	09 33 016 2702																	
Han [®] 24 E	24 B	09 33 024 2602	09 33 024 2702																	

Han E [®] double contacts to connect the PCB-adapter	Part number		Drawing	Dimensions in mm
	Male contacts	Female contacts		
	09 33 000 6180	09 33 000 6280		

PCB adapter	Part number	Drawing	Dimensions in mm
	09 33 000 9996		

Housing	Size	Part number	Drawing	Dimensions in mm																				
	6 B 10 B 16 B 24 B	09 30 006 0301 09 30 010 0301 09 30 016 0301 09 30 024 0301		<table border="1"> <thead> <tr> <th>Size</th> <th>a</th> <th>b</th> <th>Panel cut out</th> </tr> </thead> <tbody> <tr> <td>6 B</td> <td>70</td> <td>80</td> <td>48 x 35</td> </tr> <tr> <td>10 B</td> <td>83</td> <td>93</td> <td>60 x 35</td> </tr> <tr> <td>16 B</td> <td>103</td> <td>113</td> <td>82 x 35</td> </tr> <tr> <td>24 B</td> <td>130</td> <td>140</td> <td>108 x 35</td> </tr> </tbody> </table> <p>Size 6 B with 1 locking lever</p>	Size	a	b	Panel cut out	6 B	70	80	48 x 35	10 B	83	93	60 x 35	16 B	103	113	82 x 35	24 B	130	140	108 x 35
Size	a	b	Panel cut out																					
6 B	70	80	48 x 35																					
10 B	83	93	60 x 35																					
16 B	103	113	82 x 35																					
24 B	130	140	108 x 35																					

Device side

Cable side

Further informations see HARTING catalogue "Industrial Connectors Han[®], chapter E"

Features

- ❑ Robust design
- ❑ Suitable for standard and EMC housings
- ❑ Low wiring costs
- ❑ Counter connector available with screw, crimp or cage clamp termination

Technical characteristics


Inserts

Number of contacts 6, 10, 16, 24

Electrical data acc. to DIN EN 61984

16 A 500 V 6 kV 3

Working current
Working voltage
Rated impulse voltage
Pollution degree




Insulation resistance
Material
Limiting temperatures
Flammability acc. to UL 94
Mechanical working life
- Mating cycles
Wire gauge


$\geq 10^{10} \Omega$
Polycarbonate
-40 °C / +125 °C
V0
 ≥ 500
0.5 - 4 mm²

Layout of printed circuit boards


Han[®] 6 E

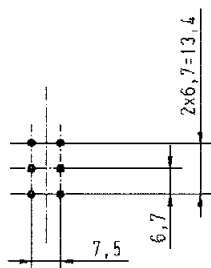


Han[®] 10 E



Han[®] 16 E

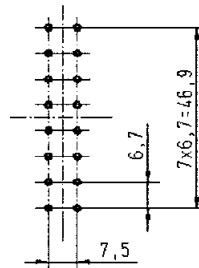


Han[®] 24 E

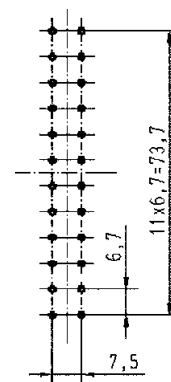

Recommended hole diameter: 1.8 mm

Assembly situation

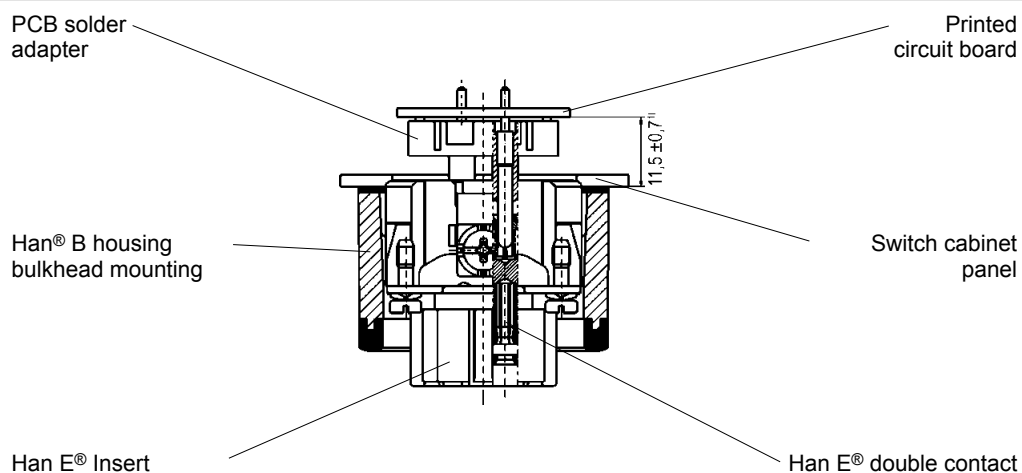

¹⁾ for Han[®] B EMC hoods/housings spacing of 12.5 ± 0.7 is necessary as no flange seal is used

Hinged frame	No. of modules	Part number		Size	Figure
		Male insert (M)	Female insert (F)		
	1	09 14 000 0304	09 14 000 0304	10 A	Drawings and further details see HARTING catalogue "Industrial Connectors Han®, chapter 06".
	2	09 14 006 0303	09 14 006 0313	6 B	
	3	09 14 010 0303	09 14 010 0313	10 B	
	4	09 14 016 0303	09 14 016 0313	16 B	
	5	09 14 024 0303	09 14 024 0313	24 B	
	6	09 14 024 0303	09 14 024 0313	24 B	

Identification	Part number		Drawing	Dimensions in mm						
	Male insert (M)	Female insert (F)								
Han DD® module PCB termination/ crimp termination 	09 14 012 3001	09 14 012 3101								
Han D® double contacts to connect the PCB 	09 15 000 6191	09 15 000 6291								
PCB adapter for PCBs up to 1.6 mm for PCBs up to 2.4 mm 	09 16 000 9905 09 16 000 9908		<table border="1"> <thead> <tr> <th></th> <th>a</th> </tr> </thead> <tbody> <tr> <td>09 16 000 9905</td> <td>2.6</td> </tr> <tr> <td>09 16 000 9908</td> <td>3.4</td> </tr> </tbody> </table>		a	09 16 000 9905	2.6	09 16 000 9908	3.4	
	a									
09 16 000 9905	2.6									
09 16 000 9908	3.4									

Han® axial screw module	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
Axial screw termination Cable side 	09 14 002 2601	09 14 002 2701		
PCB adaption Device side 	09 14 002 2603	09 14 002 2703		
Solder contact 	09 32 000 6295			

Features

- ❑ Modular assembly
- ❑ Robust design
- ❑ Suitable for standard and EMC housings
- ❑ Low wiring costs

Technical characteristics

Han DD® module with PCB-adapter

Number of contacts	12
Working current	7.5 A
Working voltage	250 V
Wire gauge	0.14 - 2.5 mm ²

Han® axial screw module for PCB adaptations


Number of contacts	2
Working current	40 A
Working voltage	500 V
Wire gauge	2.5 - 10 mm ²

Layout of printed circuit boards

Depiction

Recommended hole diameter: 0.8 mm


Recommended hole diameter: 3.2 mm

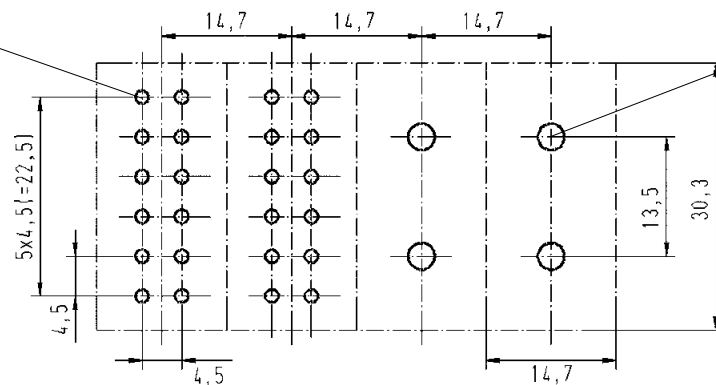

Han DD® module


Han® axial screw module 40 A

Assembly situation

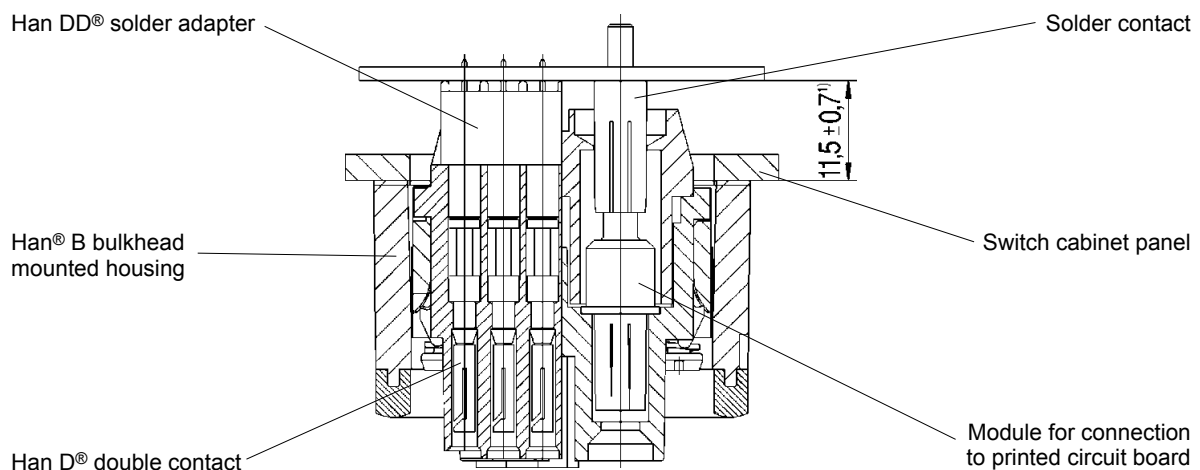


¹⁾ for Han® B EMC hoods/housings spacing of 12.5 ± 0.7 is necessary as no flange seal is used

- Secondary mating between industrial connector and printed circuit board.
- No higher force is applied on the soldering joint when mating the industrial connector due to an additional mating point.
- No wiring between printed circuit board and industrial connector necessary.
- thus no wiring faults
⇒ no testing, no costs
- Connecting times are minimized.
- Easy handling is time and cost saving.
- The production of mechanical and electrical / electronical components can be completely separated.
- Possibility to reach a higher degree of automation in the production (i. e. wave soldering of the PCBs).

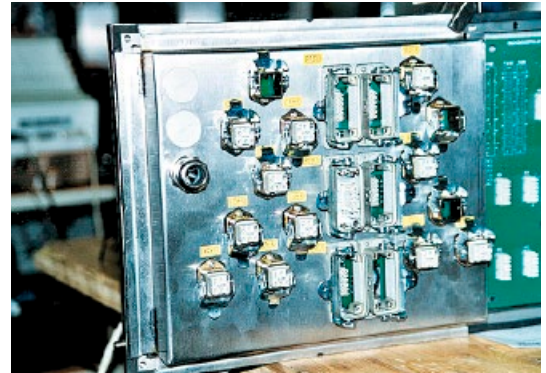

Han DD® and Han® Q 5/0 PCB-adapter
Wilhelm Fette GmbH, Germany

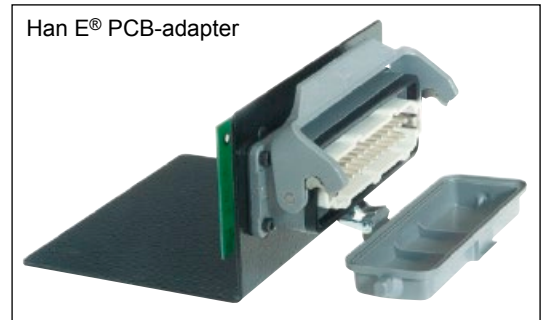

Han E® PCB-adapter

