

Models	Voltage Frequency	Version (*)	Compliance	Certification on demand
MSP404*PH	1~ 115V 50/60Hz	0-1	CE	
MSP404*TH	1~ 230V 50/60Hz	0-1	CE	
MSP404*THI	1~ 230V 50/60Hz	0-1	CE	

On demand for minimum quantity: Special Voltage, Certifications.

(*) 0 = NO Electromechanical thermostat control.



(*) 1 = Electromechanical thermostat control.

Available accessories	Remote Thermostat	See Data Sheet	B90110

On demand for minimum quantity: Inox Cover AISI304 and Special painting.

	Voltage	I rated 50/60 Hz	Protection Fuse
Operating Voltage ±10%	1~ 115V	0,9 / 1,2 A	T2 A
	1~ 230V	0,6 / 0,8 A	T2 A

Technical data		Frequency 50/60 Hz	
Power supply		1~ 230V	
Specific thermal power		40 W/K	[136 Btu/h/K]
Dimensions	L x H x P	335x790x100	[13,19x31,10x3,94 in]
Absorbed electrical power	2 Fans	130 / 180 W	
Fan flow rate	Ext. cabinet	600 / 625 m ³ /h	
	Int. cabinet	600 / 625 m ³ /h	
Temperature range	Int. cabinet	-5 ÷ 55 °C	[23 ÷ 131 °F]
Weight		13 kg	[28,7 lb]
Protection standard EN 60529	Int. cabinet	IP 54	
Standard colour	Embossed	RAL 7035	
Power connection		Connector	
Installation environment		Indoor	

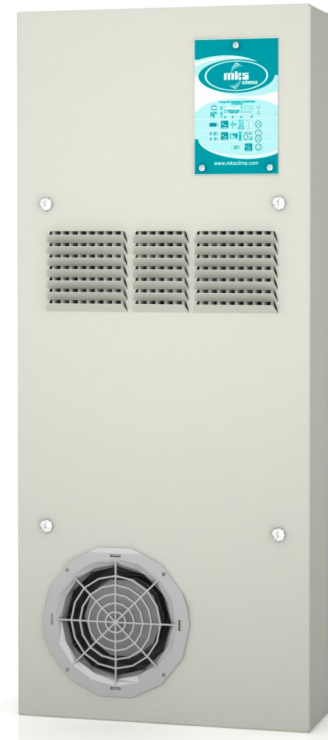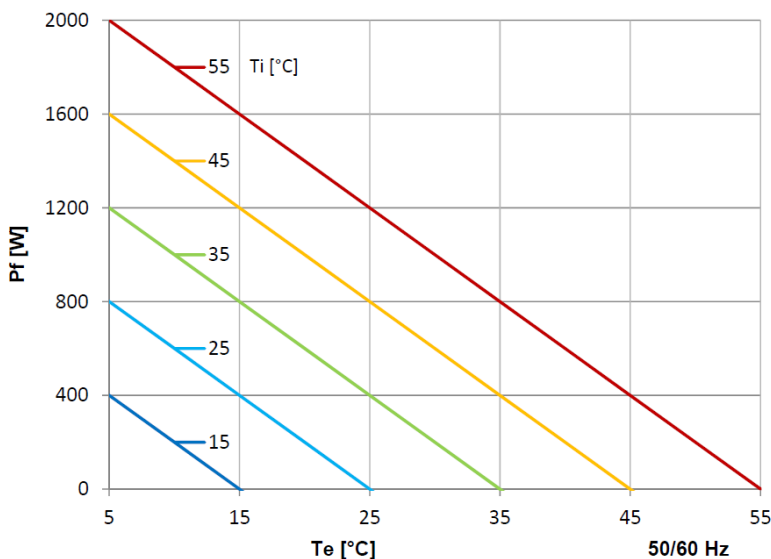

EXTERNAL MOUNTING

Dimensions

Mounting cut-out

