

# Off Grid Solar Inverter

## SCP300 - 5K



### Features



- Pure sine wave solar inverter
- Detachable LCD control module with multiple communications



- Wide DC input range
- Built-in Bluetooth for mobile monitoring (Android App is available)



- Support USB On-the-Go function
- Reserved communication port for BMS (RS485)




- Battery independent function
- Smart battery charger design for optimized battery performance



- Parallel operation with up to 9 units
- Dual outputs selected as either programmable output or generator input

### Product Application

#### Chart

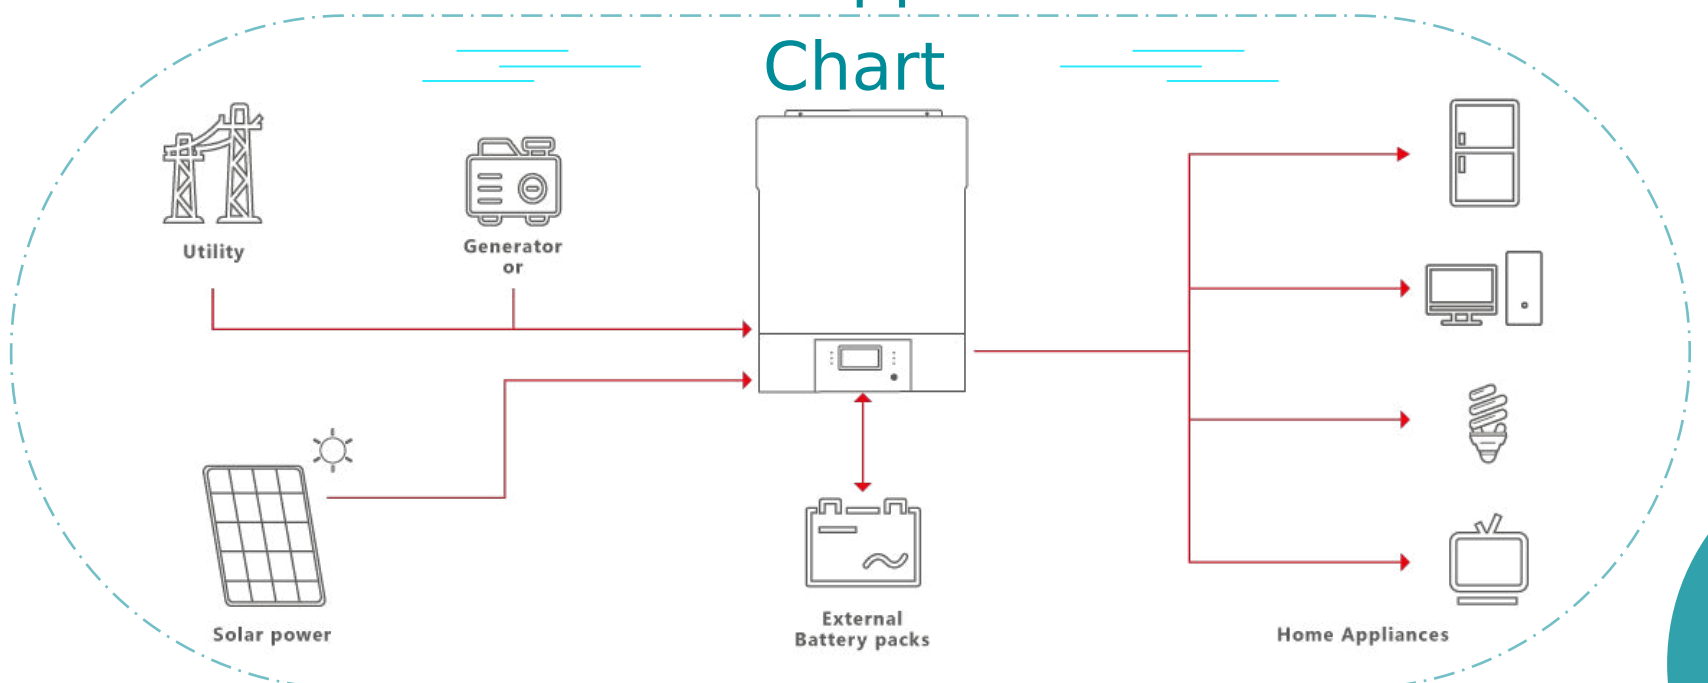

## Product Model and Technical parameters

MODEL	SCP300-5648
<b>Rated Power</b>	5000VA/5000W
Voltage	230 VAC
Selectable Voltage Range	170-280 VAC (For Personal Computers)
	90-280 VAC (For Home Appliances)
Frequency Range	50Hz/60Hz(Auto sensing)
<b>OUTPUT</b>	
AC Voltage Regulation (Batt. Mode)	230VAC $\pm$ 5%
Overload capacity	5s@ $\geq$ 150% load; 10s@110%~150% load; 100ms @ $\geq$ 200% load
Efficiency (Peak)	93%
Transfer Time	10 ms (For Personal Computers) 20 ms (For Home Appliances)
Waveform	Pure Sine Wave
Dual Outputs	Yes
<b>BATTERY</b>	
Battery Voltage	48 VDC
Floating Charge Voltage	54 VDC
Overcharge Protection	66 VDC
<b>SOLAR CHARGER &amp; AC CHARGER</b>	
Solar Charger type	MPPT
Maximum PV Array Power	5000W
MPPT Range @ Operating Voltage	120 ~ 430 VDC
Maximum PV Array Open Circuit Voltage	450 VDC
Maximum Solar Charge Current	100A
Maximum AC Charge Current	100A
Maximum Charge Current	100A
<b>PHYSICAL</b>	
Dimension, D X W X H (mm)	140 x 295 x 468
Net Weight (kgs)	12.0
Communication Interface	USB, RS232, RS485, Bluetooth
<b>OPERATING ENVIRONMENT</b>	
Humidity	5% to 95% Relative Humidity(Non-condensing)
Operating Temperature	-10°C to 50°C
Storage Temperature	-15°C to 60°C